

# ML-64000-180

## Safety Precautions

---

**Before Use**

**For Safe Usage**

**Residual Risks**

**Standards and Approvals**



Original instructions

---

## Cautions

- No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Seiko Epson Corporation.
- The contents of this document are subject to change without notice.
- While every precaution has been taken in the preparation of this document, Seiko Epson Corporation assumes no responsibility for errors or omissions.
- Neither is any liability assumed for damages resulting from the use of the information contained herein.
- Neither Seiko Epson Corporation nor its affiliates shall be liable to the purchaser of this product or third parties for damages, losses, costs, or expenses incurred by the purchaser or third parties as a result of: accident, misuse, or abuse of this product or unauthorized modifications, repairs, or alterations to this product, or (excluding the U.S.) failure to strictly comply with Seiko Epson Corporation's operating and maintenance instructions.
- Seiko Epson Corporation shall not be liable against any damages or problems arising from the use of any options or any consumable products other than those designated as Original EPSON Products or EPSON Approved Products by Seiko Epson Corporation.

## Trademarks

All trademarks are the property of their respective owners and used for identification purpose only.

©Seiko Epson Corporation 2019–2025

# Contents

|  |           |
|--|-----------|
| ■ Contents.....  | 3         |
| <hr/>  |           |
| <b><i>Before Use</i></b> .....   | <b>6</b>  |
| ■ Meaning of Symbols.....  | 6         |
| <hr/>  |           |
| <b><i>For Safe Usage</i></b> .....   | <b>7</b>  |
| ■ Limitations for Usage .....  | 7         |
| Limitations for Users .....  | 7         |
| ■ Warning Labels .....   | 7         |
| Meaning of Labels.....   | 7         |
| Location of Labels .....   | 8         |
| ■ Precautions for Installation and Power Supply .....                          | 12        |
| ■ Handling Precautions.....  | 13        |
| Notes When Not Using the Printer.....  | 15        |
| Regular Replacement Parts for Maintaining Safety .....                         | 15        |
| ■ Maintenance Precautions.....   | 16        |
| Precautions for Maintenance Work.....  | 17        |
| ■ Precautions for Handling Consumables (Ink, Maintenance Liquid) and Waste Ink | 18        |
| ■ Safety Devices.....  | 19        |
| Emergency Stop Buttons.....  | 19        |
| Pause Buttons.....   | 21        |
| List and Descriptions of All Safety Functions.....                             | 22        |
| <hr/>  |           |
| <b><i>Residual Risks</i></b> .....   | <b>23</b> |
| ■ List of Residual Risks.....  | 23        |
| ■ Residual Risk Map .....  | 26        |
| ■ Actions Leading to Residual Risks .....                                      | 28        |
| <hr/>  |           |
| <b><i>Standards and Approvals</i></b> .....                                    | <b>43</b> |
| ■ Except for Japan and Taiwan Users.....                                       | 43        |
| ■ For Users in Europe .....  | 43        |
| IEC61000-3-12 .....  | 44        |
| Türkiye'deki Kullanıcılar için .....   | 44        |

---

|                             |    |
|-----------------------------|----|
| ■ For Users in Brazil ..... | 45 |
| ■ For Users in India .....  | 46 |
| ■ 面向台灣地區使用者 .....           | 47 |
| ■ 한국 사용자용 .....             | 47 |
















# Before Use

In order to use the machine safely, be sure to read the User's Manual for this machine before use. Handling the machine in violation of the content of the User's Manual for this machine can cause failures and accidents. Be sure to keep the User's Manual for this machine in an easily accessible location so that it can be referenced whenever necessary.

## Meaning of Symbols

This document uses the following symbols to ensure the product is used safely and to prevent risks and damage. The symbols have the meanings described below.

|   |
|---|
|  <b>WARNING:</b><br>This symbol indicates content where mishandling the machine by ignoring this symbol can result in death or serious injuries. |
|  <b>CAUTION:</b><br>This symbol indicates content where mishandling the machine by ignoring this symbol can result in injury or property damage. |

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| Indicates actions you must not do (prohibited actions).                             | Indicates things you must do (instructions, actions).                               | Do not disassemble  | Do not touch  | Fire strictly prohibited  |
|  |  |  |  |  |
| Eye protection required   | Protective gloves required  | Protective clothing required  | Respiratory protection required   | Hair net required   |
|  |   |   |   |   |
| Safety shoes required   |   |   |   |   |

# For Safe Usage

This section provides information that must be observed in order to use this machine safely and prevent injury and/or property damage.

## Limitations for Usage

### Limitations for Users

This machine includes the following dangerous locations. Undergo appropriate training and thoroughly understand the dangers before usage.

Warning labels are applied to dangerous locations. (Refer to "Warning Labels".)

- Risk of electric shock
- High temperatures
- Risk of fingers being pinched or crushed
- Risk of fingers being caught or pinched











## Warning Labels





Warning labels are applied to this machine so that users can easily recognize dangerous locations.

Absolutely do not remove the warning labels applied to this machine. If warning labels become illegible or start to peel off, contact your dealer or Epson Support and replace the labels with new ones.

The label meanings as well as the locations they are applied in are described below.

### Meaning of Labels

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| CAUTION: Risk of electric shock   | CAUTION: High temperatures  | CAUTION: Risk of pinching or crushing fingers                                       | CAUTION: Risk of hand injury  | CAUTION: Risk of becoming caught between parts  |
|  |  |  |  |  |
| CAUTION: Risk of becoming pulled into machine                                       | CAUTION: Strong magnetic field  | Do not operate without guard  | No pacemakers   | CAUTION: Strong magnetic field  |

|   |   |   |   |
|---|---|---|---|
|  |  |  |  |
| Alternating current   | ON (power)  | OFF (power)   | Protective ground   |

---

## Location of Labels


Main electric box




Front




Rear

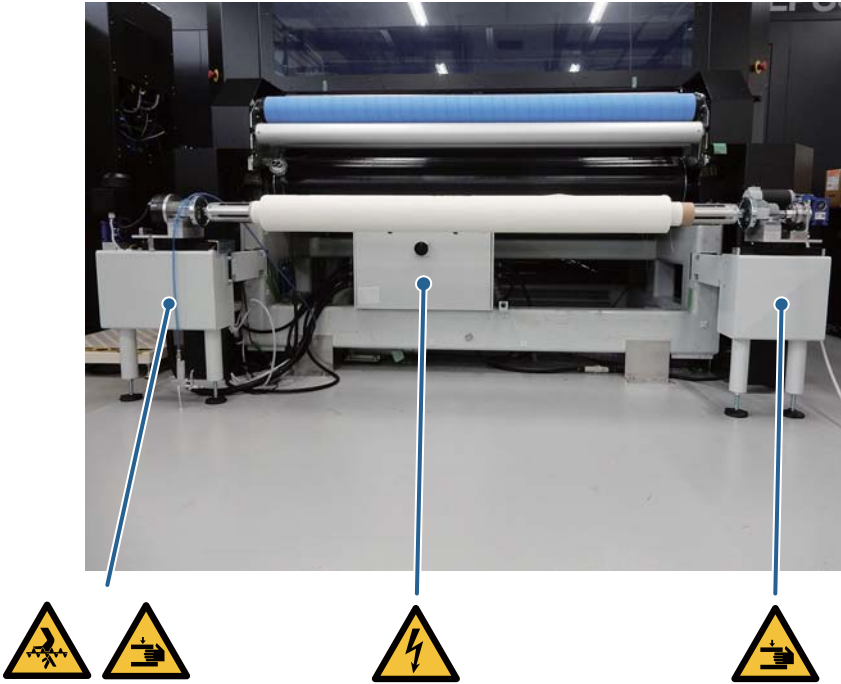


Side (Home side)

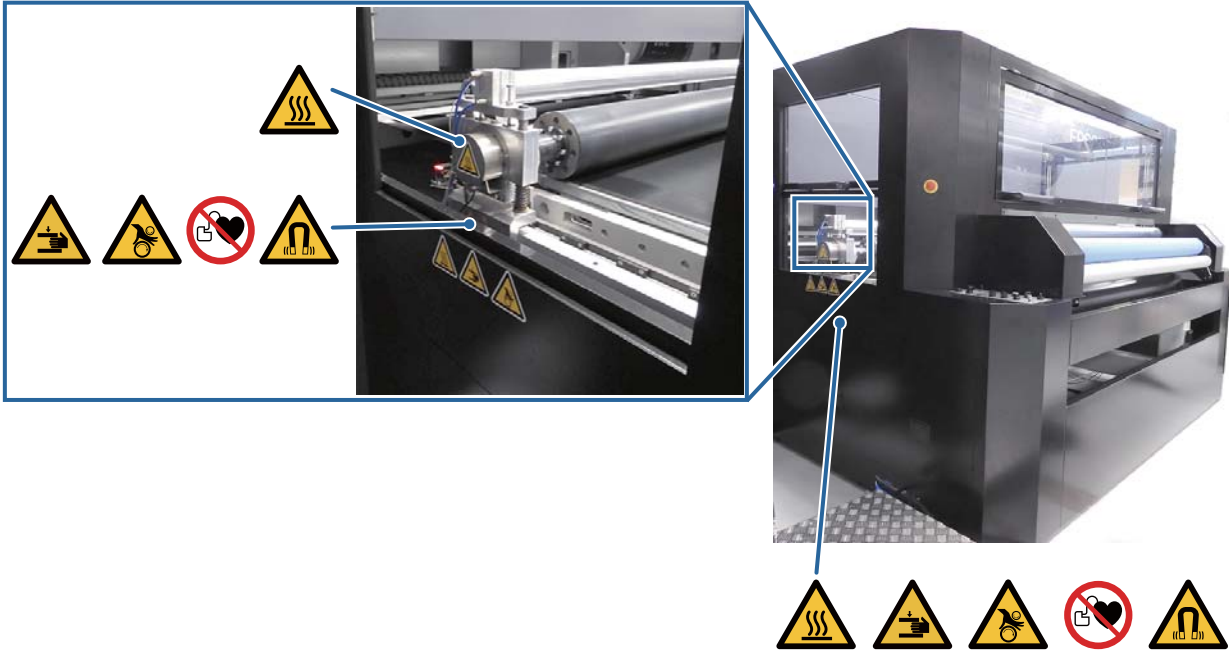



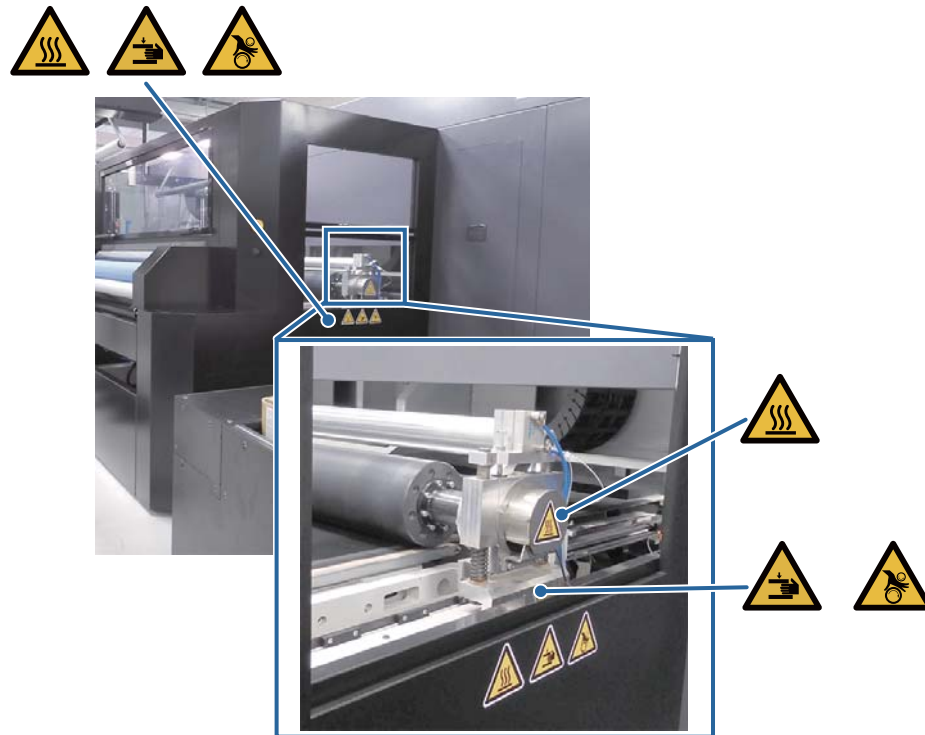

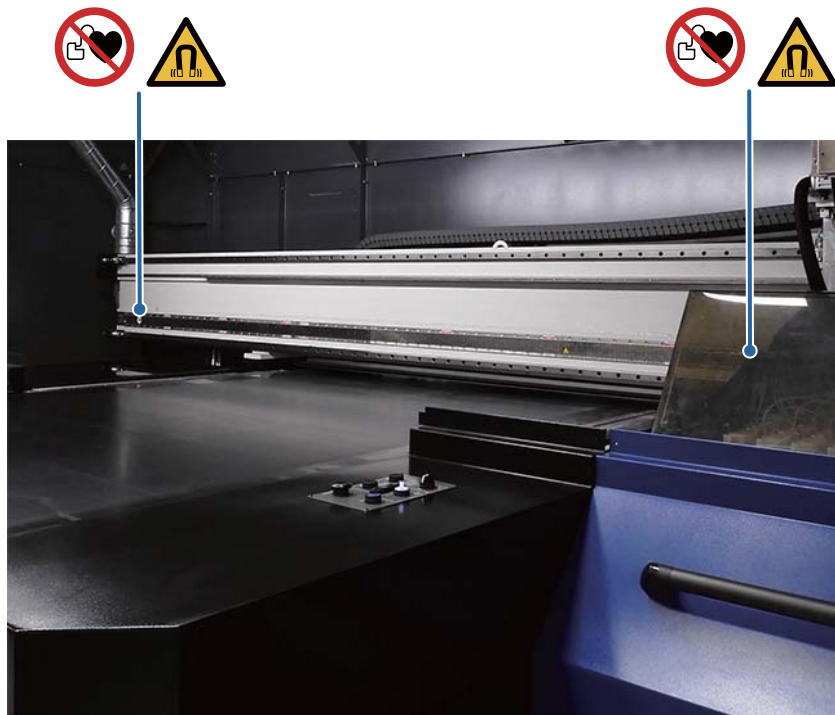

Side (Full side)





When opening the front covers












## Precautions for Installation and Power Supply

|  <b>WARNING</b> |   |
|--|---|
|                 | <b>Use a power cord that meets the safety standards for the region in which this machine is used.</b>   |
|                 | <b>Contact your dealer or Epson Support before connecting a new earth terminal.</b>   |
|                 | <p><b>Install this machine on a flat, stable surface that is wider than the machine and that can safely support its weight.</b></p> <p>Contact your dealer or Epson Support for assistance before moving this machine. There is a risk of injury if this machine tips over.</p> <p>There is a risk of electric shock or fire if cables become damaged.</p> <p>Expected performance levels might no longer be guaranteed if changes are made to the condition of this machine.</p> |
|                | <p><b>Do not use this machine near flames or volatile substances such as alcohol and thinner.</b></p> <p>Otherwise, there is a risk of electric shock or fire.</p>  |
|               | <p><b>Do not use this machine in environments where flammable gas, explosive gas, or the like might be present. In addition, do not use flammable gas sprays in or near this machine.</b></p> <p>Otherwise, there is a risk of fire.</p>  |

|  <b>CAUTION</b> |  |
|--|--|
|                 | <b>For safety management, the person in charge of managing devices should manage the hardware key for the main electric box.</b> |

## Handling Precautions

|  <b>WARNING</b>   |   |
|--|---|
|   | <p><b>Immediately stop using this machine if there is smoke, unusual odors or sounds, or any other abnormal conditions.</b><br/>Otherwise, there is a risk of electric shock or fire.<br/>If an abnormal condition occurs, immediately turn off the main power, cut off all power supplied to the machine, and contact your dealer or Epson Support for assistance.</p> <p><b>Do not attempt any repairs yourself. Doing so is extremely dangerous.</b></p> <p><b>Do not insert or drop metallic or flammable items into any openings on the machine.</b><br/>Otherwise, there is a risk of electric shock or fire.</p>   |
|   | <p><b>Do not touch any areas inside this machine other than those that are indicated in this manual.</b><br/>Otherwise, there is a risk of electric shock or burns.</p>   |
|    | <p><b>Do not remove any parts other than those that are indicated in this manual, and do not install, disassemble, or modify any parts other than those specified.</b><br/>Otherwise, you could be injured or an accident could occur due to abnormal heat or electric shock.</p>   |
|   | <p><b>Do not deliberately remove or disable safety devices.</b><br/>Doing so leads to the risk of injury, malfunction, and/or damage to the machine.</p>  |
| <br> | <p><b>Do not operate this machine or the computer while maintenance is being performed.</b><br/><b>When performing maintenance work in a location that is out of sight of the control PC operator, make sure that only the people performing maintenance work and no one else is able to operate the control PC.</b><br/>Doing so leads to the risk of your hand or other parts of your body becoming caught in the machine.</p> <p><b>Keep your hands away from moving parts, such as the belt, pressure roller, drive belt for the cleaning tank brush, and vertically moving parts of the cleaning tank, while the machine is operating.</b><br/>Otherwise, there is a risk of your hands, hair, or clothing becoming caught in the machine.</p> |
|   | <p><b>Do not operate this machine if you have a pacemaker.</b><br/>The electromagnetic waves that are generated by this machine can affect the operation of pacemakers.</p>   |
|   | <p><b>This machine generates a strong magnetic field. Do not use precision equipment such as watches and mobile telephones nearby.</b><br/>Precision equipment could malfunction or become damaged by the strong magnetic field.</p>  |

 **CAUTION**



**Be careful to avoid pinching your hands and fingers or hitting your head on the corner of the protection covers when opening and closing the protection covers on this machine.**  
Failure to do so could lead to injury.





**The setting and removal of fabric rolls should be performed by two people. When lifting the fabric roll, make sure you bend your knees sufficiently and lift in a natural position.**  
Fabric rolls weigh 30 kg or more. Dropping a fabric roll can lead to injury. Lifting with incorrect posture can lead to injury and/or back pain.



**Do not touch the orange cable in the main electric box. It is live even when the power is off.**

Orange cable

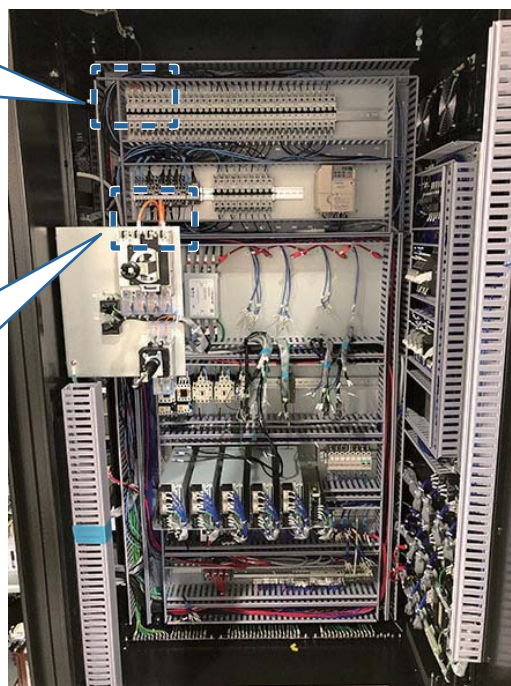

**Before opening the main electric box door, turn the main power switch on the main electric box to 0 (OFF) and wait 10 seconds.**

---

## Notes When Not Using the Printer

- A service engineer must do pre- and post-maintenance when the printer is not used for over 6 weeks. Pre- and post-maintenance will be provided for a fee. During pre-maintenance, the ink in the ink tubes is removed, and the inside of the tubes is washed using the cleaning fluid in the cleaning cartridge, to prepare for long-term storage. When restarting use of the printer, recharge the printer with ink. Moreover, depending on the environment and length of time stored, repairs may be required during post-maintenance even if pre-maintenance is done. If repairs are necessary, they will be done for a fee. Contact your dealer or Epson Support.
- Depending on the type of ink, you may need to remove and shake the ink cartridges installed in the machine if they have not been used for a long period of time.  
For more information, refer to the User's Manual.

---

## Regular Replacement Parts for Maintaining Safety
















The front cover hinges should be checked during daily inspections and replaced after the indicated number of years have passed.

Continuing to use this product without replacing the hinges could lead to injury if a front cover falls.







When the number of years indicated for replacement have passed, contact your dealer or Epson Support.

For more information, refer to the User's Manual.

## Maintenance Precautions

|  <b>WARNING</b>   |   |
|--|---|
|   | <p><b>If using glue or glue remover that contains flammable gas, explosive gas, or the like, ensure sufficient ventilation and make sure that the ignition point and explosion limit are not reached.</b></p>   |
|  <b>CAUTION</b>   |   |
| <br><br><br> | <p><b>During maintenance work, wear all of the protective equipment described in the maintenance procedures in the User's Manual (eye protection, protective gloves, respiratory protection, etc.).</b></p> <ul style="list-style-type: none"> <li>• Use protective equipment compliant with the safety regulations.</li> <li>• Using additional protective equipment compliant with the safety regulations is recommended when necessary.</li> </ul> |
|   | <p><b>Be sure to wear eye protection during maintenance work on areas near the ink path, such as when cleaning heads, caps, and wipers.</b><br/>Failure to do so could cause ink to splash into the eyes.</p>   |
|   | <p><b>Be sure to wear protective gloves when using maintenance liquid.</b></p>  |
| <br>   | <p><b>Be sure to wear eye protection and respiratory protection when applying glue.</b><br/>For details, refer to the instructions of the SDS for the glue and glue remover you are actually using.</p>   |
|   | <p><b>Long hair should be tied back and worn under a hair net.</b><br/>Otherwise, your hands and clothing could become stained with ink, and your fingers and hair could become caught in the machine, causing injury.</p>  |
|   | <p><b>Do not climb on the machine while working on it. Note that the machine is not designed to support the weight and can be easily damaged.</b></p>   |
|   | <p><b>If waste ink or maintenance liquid gets on the floor, wipe it up with a wipe cloth.</b><br/>Failure to do so could cause an injury due to slipping and falling.</p>   |
|   | <p><b>Make sure that all maintenance work is performed at room temperature.</b></p>   |








## Precautions for Maintenance Work

|  |  |
|--|--|
|   | <b>When maintenance work is completed, immediately return the protective equipment to its original location.</b>   |
|   | <b>Make sure that no tools or parts used in maintenance work or other foreign materials are left on the operating parts of the machine or inside the machine.</b>                                  |
|   | <b>During maintenance, do not use sharpening stones, abrasive/corrosive materials, or solvents (excluding glue).</b><br>Doing so may erase numbers, codes, or characters indicated on the machine. |
|   | <b>Do not expose the electrical and electronic devices and motors to liquid.</b>   |
|   | <b>Do not touch the interlocks on the front covers, maintenance cover, side doors unlock button, or rear covers.</b><br>Doing so could cause malfunctions or damage.                               |
|  | <b>Use the products properly according to the "Safety Data Sheet" for each product.</b>  |

# Precautions for Handling Consumables (Ink, Maintenance Liquid) and Waste Ink

Read the Safety Data Sheet (SDS) before handling ink cartridges\*, maintenance liquid\*, and waste ink. The Safety Data Sheet can be downloaded from the Epson website.

\* These are consumable items (sold separately).
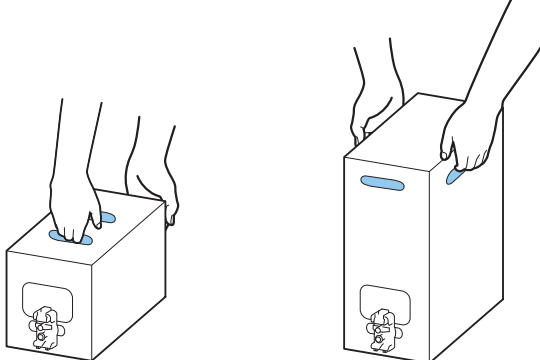
|  <b>WARNING</b>   |  |
|--|--|
|   | <p><b>If ink gets on your skin or enters your eyes or mouth, take the measures below.</b></p> <ul style="list-style-type: none"> <li>• If it gets on your skin, rinse immediately with soap and water.</li> <li>• If it enters your eyes, rinse immediately with water. Failure to observe this precaution could result in bloodshot eyes or mild inflammation. If problems persist, consult with a physician.</li> <li>• If it enters your mouth, consult a physician immediately.</li> </ul> |
|   | <p><b>Do not disassemble or modify the ink cartridges.</b></p> <p>Otherwise, fluid could get in your eyes or come in contact with your skin.</p>   |
|   | <p><b>Keep ink cartridges, maintenance liquid, cleaning liquid, scan spindle grease, waste ink, and glue out of the reach of children.</b></p>   |
| <br> | <p><b>When lifting up an ink cartridge, wear safety shoes and place your hands in the positions indicated in the figure below. Lifting with placing the hands on other positions could cause the ink cartridge to fall or pinch your fingers when you lower it, resulting in injury.</b></p> <div style="text-align: center;">  </div>   |

# Safety Devices

This machine includes the following safety devices.

---

## Emergency Stop Buttons

There are a total of five emergency stop buttons on the machine, with two on the left and right sides of the front and rear sides, and one in the main electric box.

Press this button to stop operation of this machine immediately.

Front



Rear

Home side




Full side



## Main electric box



To release the stop, turn the button to the right. [Release] on the screen of the control PC is enabled.

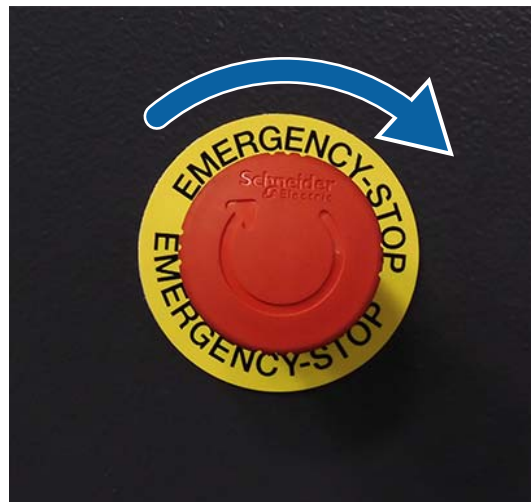

Press [Release], and when a message is displayed on the control PC, click [Return to Origin].  
The head returns to the origin and the machine is restored to its normal status.  
Data that was being printed will be discarded, and will need to be printed again.

## Pause Buttons

There are a total of four Pause buttons on the machine, with two on the left and right sides of the front and rear sides.

Press this button to pause printing of this machine.

The head stops in the cleaning station area. Press [Restart] on the screen of the control PC to restart printing.

Front



Rear

Home side



Full side



## List and Descriptions of All Safety Functions




| Safety functions  | Description   | Reference standard                 |
|---|---|------------------------------------|
| Protection against access to hazards by an interlock for the front covers | The front covers are locked to prevent them from opening while the carriage is operating. If you forcibly open a cover, the carriage will stop immediately.   | ISO 13849-1:2006, Category 3, PL d |
| Protection against access to hazards by an interlock for the rear covers  | The rear covers are locked to prevent them from opening while the carriage, belt, or pressure roller is operating. If you forcibly open a cover, the carriage, belt, and pressure roller will stop immediately. | ISO 13849-1:2006, Category 3, PL d |
| Protection against access to hazards by an interlock for the rear covers  | The rear covers are locked to prevent them from opening while the carriage is operating. If you forcibly open a cover, the carriage will stop immediately.  | ISO 13849-1:2006, Category 3, PL d |
| Protection against access to hazards by an interlock for the side doors   | The side doors are locked to prevent them from opening while the carriage is operating. If you forcibly open a side door, the carriage will stop immediately.   | ISO 13849-1:2006, Category 3, PL d |
| Emergency stop for hazards using the emergency stop button                | If emergency stop button is pressed, the carriage, belt, and pressure roller will stop immediately.   | ISO 13849-1:2006, Category 3, PL d |

# Residual Risks

This section provides information regarding the residual risks involved in operating this machine.

## *List of Residual Risks*

Residual risks are listed here categorized in accordance with the following definitions.

|   |   |
|---|---|
|  <b>DANGER:</b>  | Contents that involve a high risk of death or severe injury if protective measures are not taken. |
|  <b>WARNING:</b> | Contents that involve a risk of death or severe injury if protective measures are not taken.      |
|  <b>CAUTION:</b> | Contents that involve a high risk of minor injury if protective measures are not taken.           |


| No. | Operation stage | Work   | Qualification / training required for work  | Location on machine                                 | Residual risk *1 (Degree of harm) | Content of harm  | Protective measure to be implemented by machine user   | Page to be referenced                              |
|-----|-----------------|--|---|---|-----------------------------------|--|--|--|
| 1   | Maintenance     | Maintenance work such as cleaning the belt cleaning tank | Must understand the content of the User's Manual and have undergone operational training from a Seiko Epson Group service / support representative or a service representative authorized by Seiko Epson. | Printer unit (Belt cleaning tank)                   | CAUTION                           | If the cleaning tank is raised or lowered while a worker is touching the belt cleaning tank, the worker's hand or fingers will be caught.  | Be careful to avoid touching the belt cleaning tank while the printer is in operation. If performing maintenance work, keep in mind the risk involved in the raising / lowering operation. | <a href="#">Page 29</a>                            |
| 2   | Maintenance     | Work near the high-voltage live sections                 | Must understand the content of the User's Manual and have undergone operational training from a Seiko Epson Group service / support representative or a service representative authorized by Seiko Epson. | Main electric box and electric box for feeding unit | WARNING                           | When the protective cover is removed or when the live parts could be touched because the electric box is not locked when the printer is in operation, the worker could touch the wiring and receive an electric shock. | Do not remove the protective covers for the wiring inside the electric box. Lock the electric box while the printer is in operation.   | <a href="#">Page 28</a><br><a href="#">Page 32</a> |

| No. | Operation stage | Work  | Qualification / training required for work  | Location on machine                    | Residual risk *1 (Degree of harm) | Content of harm   | Protective measure to be implemented by machine user   | Page to be referenced                                |
|-----|-----------------|---|---|--|-----------------------------------|---|--|--|
| 3   | Operation       | Loading the Fabric (Loading the fabric on the pressure roller)                            | Must understand the content of the User's Manual and have undergone operational training from a Seiko Epson Group service / support representative or a service representative authorized by Seiko Epson. | Printer unit (Pressure roller section) | WARNING                           | The strong magnetic field could cause a malfunction in heart pacemakers.  | Workers using heart pacemakers should not come near the relevant locations.                      | <a href="#">Page 33</a> ,<br><a href="#">Page 37</a> |
| 4   | Maintenance     | Maintenance work such as cleaning the machine interior                                    |   | Printer unit (Scan spindle section)    | WARNING                           | The strong magnetic field could cause a malfunction in heart pacemakers.  | Workers using heart pacemakers should not come near the relevant locations.                      | <a href="#">Page 30</a>                              |
| 5   | Maintenance     | Application work of materials containing organic solvent (Removal or application of glue) |   | Printer unit (Feeding belt section)    | CAUTION                           | When removing or applying glue, there is a risk of inhaling harmful vapors released by the glue or remover, or of it becoming adhered to your skin. | Be sure to use appropriate personal protective equipment, and to ventilate the work environment. | <a href="#">Page 41</a>                              |


# Residual Risk Map

The "No." title on the residual risk map matches the "No." on the list of residual risks in the previous section.

Front

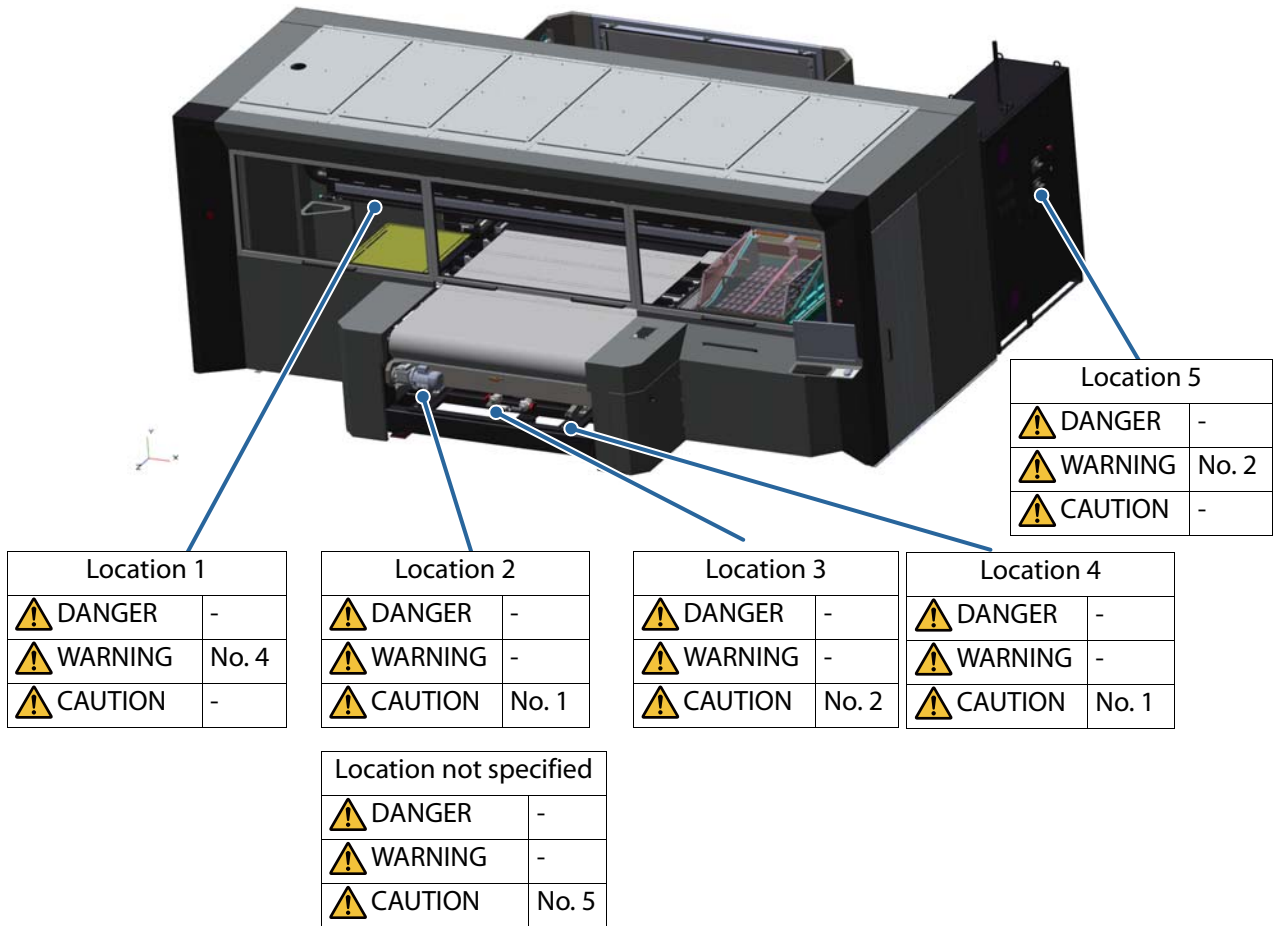


Rear  
Home side

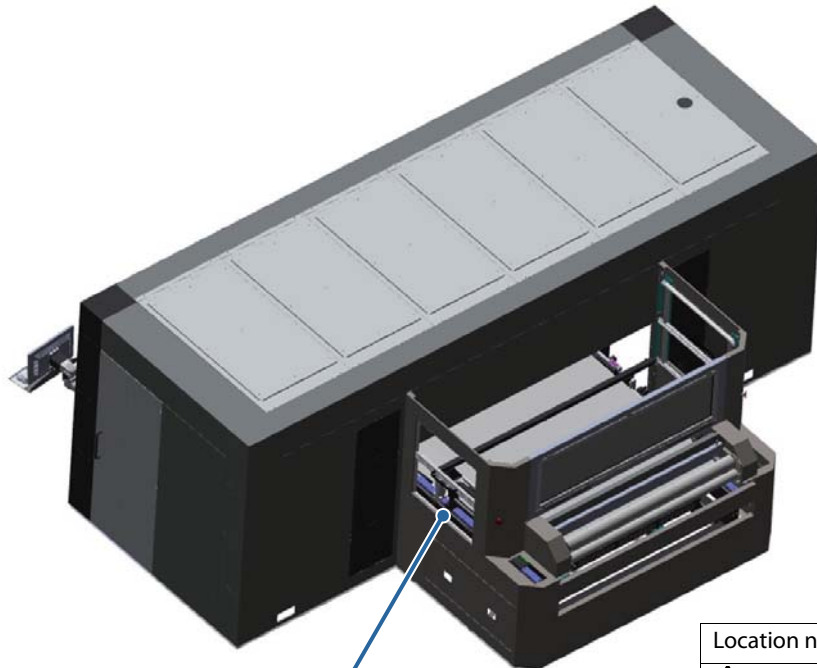

| Location 5 |       |
|------------|-------|
| ⚠ DANGER   | -     |
| ⚠ WARNING  | No. 3 |
| ⚠ CAUTION  | -     |

| Location not specified |       |
|------------------------|-------|
| ⚠ DANGER               | -     |
| ⚠ WARNING              | -     |
| ⚠ CAUTION              | No. 5 |

Full side

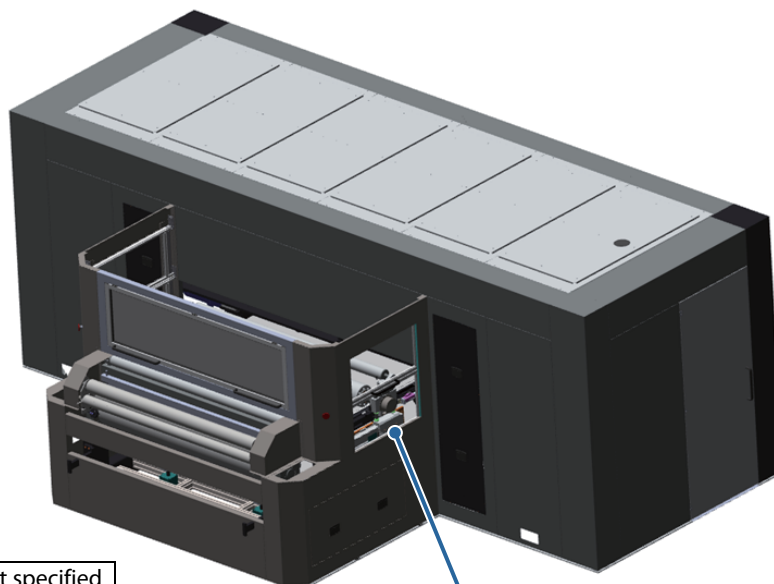

| Location not specified |       |
|------------------------|-------|
| ⚠ DANGER               | -     |
| ⚠ WARNING              | -     |
| ⚠ CAUTION              | No. 5 |

| Location 6 |       |
|------------|-------|
| ⚠ DANGER   | -     |
| ⚠ WARNING  | No. 3 |
| ⚠ CAUTION  | -     |

## Actions Leading to Residual Risks

Performing the following actions while this machine is in use could lead to injury.

Main electric box

|   |
|---|
|  <b>WARNING</b>  |
| <b>Do not leave electric box unlocked during operation.</b>   |
|    |
|  There is a risk of touching live parts and receiving an electric shock. |

Front


**CAUTION****Do not place your hand between the belt and the cleaning tank.****The cleaning tank could rise, pinching your hand between the belt and cleaning tank, causing injury.**

Machine interior



 **WARNING**

**Do not operate this machine if you have a pacemaker.**

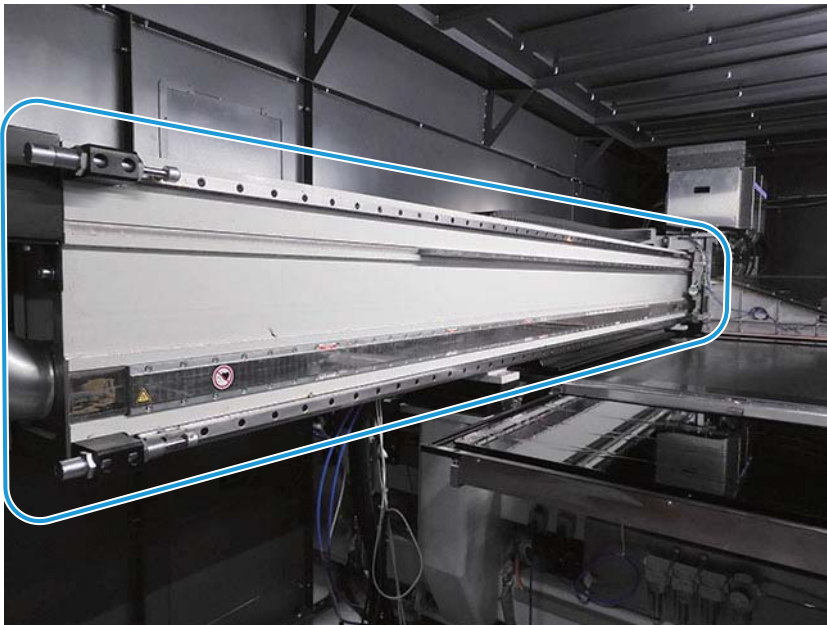

Because this machine generates a strong magnetic field, the electromagnetic waves of this machine can cause malfunctions in pacemakers.

 CAUTION

**Do not bring precision equipment such as watches and mobile telephones near the carriage rail.**




Because this machine generates a strong magnetic field, precision equipment could malfunction or become damaged.


Rear



 CAUTION

**Do not leave electric box for feeding unit unlocked during operation.**

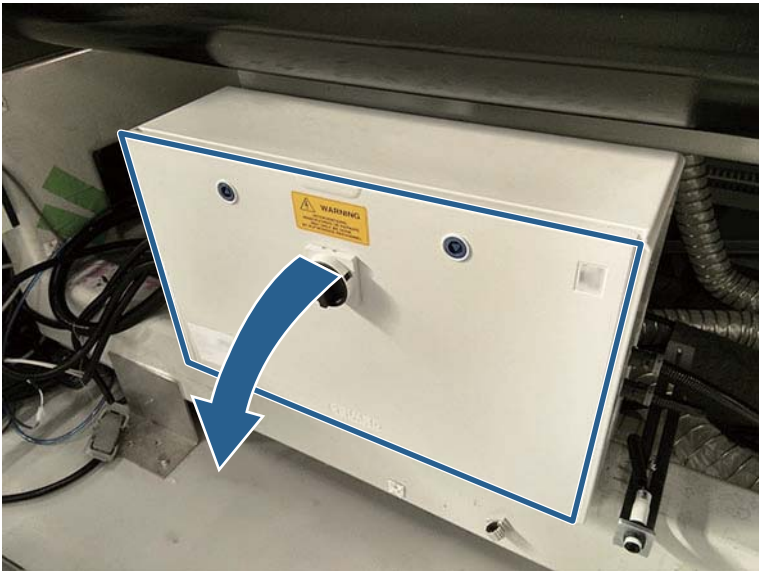


 There is a risk of touching live parts and receiving an electric shock.

Home side



 **WARNING**

**Do not operate this machine if you have a pacemaker.**




Because this machine generates a strong magnetic field, the electromagnetic waves of this machine can cause malfunctions in pacemakers.

 CAUTION

**Do not bring precision equipment such as watches and mobile telephones near the pressure roller section.**




 Because this machine generates a strong magnetic field, precision equipment could malfunction or become damaged.

 CAUTION

**Do not touch the roller section of the pressure roller for a long period.**



 It could cause burns.

 **CAUTION**

**Do not place your hand between the pressure roller and belt.**




Your hand could be pinched between the pressure roller and belt, causing injury.

 CAUTION

Do not place your hand above or below the roller holder.




 Your hand could be pinched in the roller holder, causing injury.

Full side



 **WARNING**


**Do not operate this machine if you have a pacemaker.**

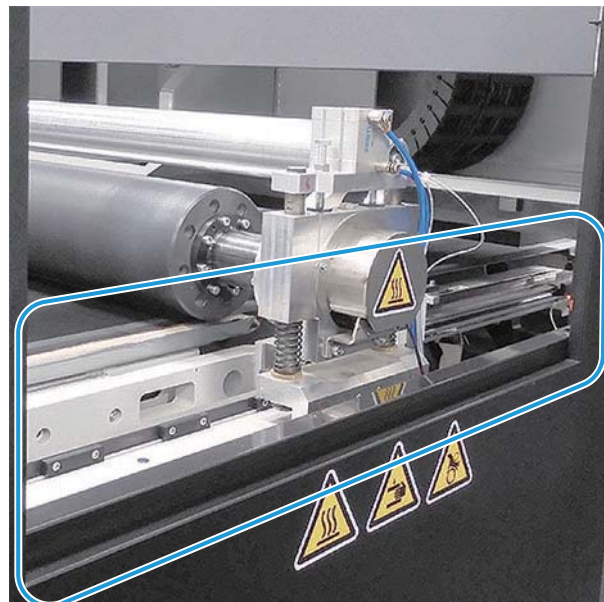


Because this machine generates a strong magnetic field, the electromagnetic waves of this machine can cause malfunctions in pacemakers.

 CAUTION

**Do not bring precision equipment such as watches and mobile telephones near the pressure roller section.**

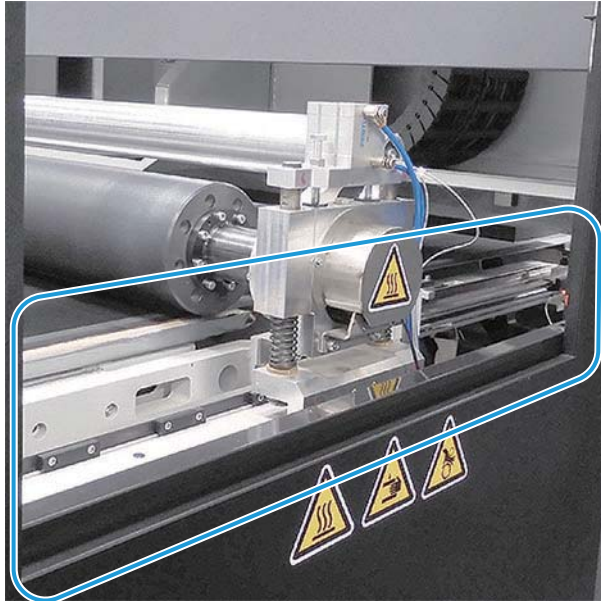


 Because this machine generates a strong magnetic field, precision equipment could malfunction or become damaged.

 CAUTION

**Do not touch the roller section of the pressure roller for a long period.**




 It could cause burns.

 CAUTION

**Do not place your hand between the pressure roller and belt.**




 Your hand could be pinched between the pressure roller and belt, causing injury.

 CAUTION

Do not place your hand above or below the roller holder.



 Your hand could be pinched in the roller holder, causing injury.

Feeding belt section and the surrounding area (when removing or applying glue)

 **CAUTION**

**Do not perform work without wearing the appropriate personal protective equipment or without ventilating the environment.**



There is a risk of inhaling harmful vapors released by the glue or remover, or of it becoming adhered to your skin.




# Standards and Approvals

## *Except for Japan and Taiwan Users*

This equipment is not intended for use in residential environments and may not provide adequate protection to radio reception in such environments.

## *For Users in Europe*

### CE Marking

 <https://www.epson.eu/conformity>

Importer:

- EPSON EUROPE B.V.

Address: Atlas Arena, Asia Building, Hoogoorddreef 5, 1101 BA Amsterdam Zuidoost The Netherlands

Web site: <https://www.epson.eu/>

- Epson (UK) Ltd.

Address: Westside, London Road, Hemel Hempstead, Hertfordshire, HP3 9TD, United Kingdom



### DECLARATION OF CONFORMITY (for EU Countries Only)

Manufacturer SEIKO EPSON CORPORATION

Address 3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan

Representative EPSON EUROPE B.V.

Address Atlas Arena, Asia Building, Hoogoorddreef 5, 1101 BA  
Amsterdam Zuidoost The Netherlands

Brand Name EPSON

Product Name Digital Printing Machine

Model N761A

Conforms to the following Directive(s) and Norm(s):

Directive 2006/42/EC: EN ISO 12100

EN 60204-1

EN 1010-1

Directive 2014/30/EU: EN 55011

EN 61000-6-2

Regulation (EU) 2023/1542

---

## IEC61000-3-12

### English

This equipment complies with IEC 61000-3-12 provided that the short-circuit power  $S_{sc}$  is greater than or equal to 683kVA at the interface point between the user's supply and the public system. It is the responsibility of the installer or user of the equipment to ensure, by consultation with the distribution network operator if necessary, that the equipment is connected only to a supply with a short-circuit power  $S_{sc}$  greater than or equal to 683kVA.

### Italiano

Questa apparecchiatura è conforme a IEC 61000-3-12 a condizione che la potenza di cortocircuito  $S_{sc}$  sia maggiore o uguale a 683 kVA nel punto di interfaccia tra l'alimentazione dell'utente e l'impianto pubblico. È responsabilità dell'installatore o dell'utente dell'apparecchiatura garantire, tramite consulto con l'operatore della rete di distribuzione se necessario, che l'apparecchiatura sia collegata solo a una fonte di alimentazione con potenza di cortocircuito  $S_{sc}$  maggiore o uguale a 683 kVA.

### Español

Este equipo cumple con la IEC 61000-3-12, siempre y cuando la potencia de cortocircuito  $S_{sc}$  sea mayor o igual a 683kVA en el punto de la interfaz entre el suministro del usuario y el sistema público. Es responsabilidad del instalador o usuario del equipo asegurar mediante consulta con el gestor de red de distribución, si es necesario, que el equipo está conectado solamente a un suministro de potencia de cortocircuito  $S_{sc}$  mayor o igual a 683kVA.

### Português

Este equipamento está em conformidade com a norma IEC 61000-3-12, desde que a potência de curto-circuito  $S_{sc}$  seja igual ou superior à 683kVA no ponto de interface entre a alimentação usada pelo utilizador e o sistema público. Cabe ao instalador ou utilizador do equipamento assegurar, se necessário consultando o operador de rede de distribuição, que o equipamento é ligado exclusivamente a um tipo de alimentação com uma potência de curto-circuito  $S_{sc}$  igual ou superior à 683kVA.

### Türkçe

Kısa devre gücü  $S_{sc}$ 'nin, kullanıcının beslemesi ile kamu sistemi arasındaki arayüz noktasında 683kVA'ya eşit veya daha büyük olması koşuluyla, bu aygıt IEC 61000-3-12 ile uyumludur. Gerekirse dağıtım şebekesi operatörüne danışarak ekipmanın yalnızca kısa devre gücü  $S_{sc}$  683kVA'ya eşit veya daha büyük olan bir kaynağa bağlanmasını sağlamak, ekipmanı kuran veya kullanan kişinin sorumluluğundadır.

---

## Türkiye'deki Kullanıcılar için

AEEE Yönetmeliğine Uygundur.

## *For Users in Brazil*

- Epson do Brasil Ind. E Com. Ltda.  
Endereço: Av. Tucunaré 720 – 06460-020, Barueri - SP -  
CNPJ: 52.106.911/0003-63

A vida útil da máquina: 10 anos

Verique a etiqueta do número serial e digite o número serial e ano de fabricação no espaço abaixo do manual impresso.

Número serial:

---

Ano de fabricação:


---

## For Users in India

### For India e-waste Rules, Declaration



This crossed out wheeled bin label indicates that this product should not be disposed of via the normal household waste stream. To prevent possible harm to the environment or human health, please separate this product from other waste streams to ensure that it can be recycled in an environmentally sound manner. For more details on the available collection facilities, please contact Epson India Pvt. Ltd. or the retailers where you purchased this product.



इस क्रॉस चिन्ह से अंकित पहिए वाला कूड़ादान सूचित करता है कि इस उत्पाद को सामान्य घरेलू कूड़े के साथ नहीं फेंकना चाहिए. पर्यावरण या मानवीय स्वास्थ्य को नुकसान पहुँचाने की संभावना से बचने के लिए, कृपया इस उत्पाद को अन्य कूड़े से अलग करें और सुनिश्चित करें कि पर्यावरण अनुकूल पद्धति से उसे पुनर्चक्रित किया जाता है. उपलब्ध संग्रहण सुविधाओं पर अतिरिक्त जानकारी के लिए, कृपया एपसॉन इंडिया प्रा.लि. से या जिस विक्रेता से उत्पाद खरीदा हो, उनसे संपर्क करें.

Epson declares our product complies with the "India E-Waste (Management) Rules" and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule II of the Rules.

एप्सन घोषणा करता है कि हमारे उत्पाद "भारतीय ई-कचरा (प्रबंधन) नियम" के अनुरूप हैं और नियमों की अनुसूची II में निर्धारित छूटों को छोड़कर सीसा, पारा, हेक्वावैलेंट क्रोमियम, पॉलिब्रोमिनेटेड बाइफेनिल्स या पॉलिब्रोमिनेटेड डाइफेनिल ईथर्स का 0.1 भार % और कैडमियम का 0.01 भार % से अधिक सांद्रताओं में उपयोग निषिद्ध है।

<https://www.epson.co.in/> (For Indian customer only)

## 面向台灣地區使用者



廢電池請回收

## 한국 사용자용

이 기기는 제 3 자의 민감한 무선 서비스와 30 m 이상의 분리 거리가 있는 곳에서 사용하기 위한 기기입니다 .