

Web Config Reference Guide

TM-P20II

TM-P80II

TM-m30III

TM-m30III-H

TM-m50II

TM-m50II-H

Cautions

- No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Seiko Epson Corporation.
- The contents of this document are subject to change without notice. Please contact us for the latest information.
- While every precaution has been taken in the preparation of this document, Seiko Epson Corporation assumes no responsibility for errors or omissions.
- Neither is any liability assumed for damages resulting from the use of the information contained herein.
- Neither Seiko Epson Corporation nor its affiliates shall be liable to the purchaser of this product or third parties for damages, losses, costs, or expenses incurred by the purchaser or third parties as a result of:
accident, misuse, or abuse of this product or unauthorized modifications, repairs, or alterations to this product, or (excluding the U.S.) failure to strictly comply with Seiko Epson Corporation's operating and maintenance instructions.
- Seiko Epson Corporation shall not be liable against any damages or problems arising from the use of any options or any consumable products other than those designated as Original Epson Products or Epson Approved Products by Seiko Epson Corporation.

Trademarks

Microsoft®, Windows®, Internet Explorer and Microsoft Edge are trademarks of the Microsoft group of companies.

Wi-Fi® is a registered trademark of Wi-Fi Alliance®.

WPA™, WPA2™, and WPA3™ are trademarks of Wi-Fi Alliance®.

Google Chrome™ is a trademark of Google LLC.

Mac®, macOS® and Safari® are trademarks of Apple Inc., registered in the U.S. and other countries and regions.

Firefox® is a trademark or registered trademark of the Mozilla Foundation in the US and other countries.

All other trademarks are the property of their respective owners and used for identification purpose only.

©Seiko Epson Corporation 2022-2025

About this Manual

Key to Symbols

The symbols in this manual are identified by their level of importance, as defined below. Read the following carefully before handling the product.

 IMPORTANT	Indicates information with which you must comply when using the product. Mishandling due to ignoring this information may cause the product to fail or malfunction.
 NOTE	Indicates supplementary explanations and information you should know.

Using Web Config


Web Config is a printer's built-in web page that allows you to check and change printer settings on your browser. To use Web Config, you need to set your computer's IP address to the same segment as the printer.

How to Start Web Config


1. Start your web browser on a computer or smart device on the network and enter the IP address of the printer in the address field.

Example for HTTPS	Example for HTTP
IPv4: https://192.0.2.111/ IPv6: https://[2001:db8::1000:1]/	IPv4: http://192.0.2.111/ IPv6: http://[2001:db8::1000:1]/

2. Select [Advanced Settings].

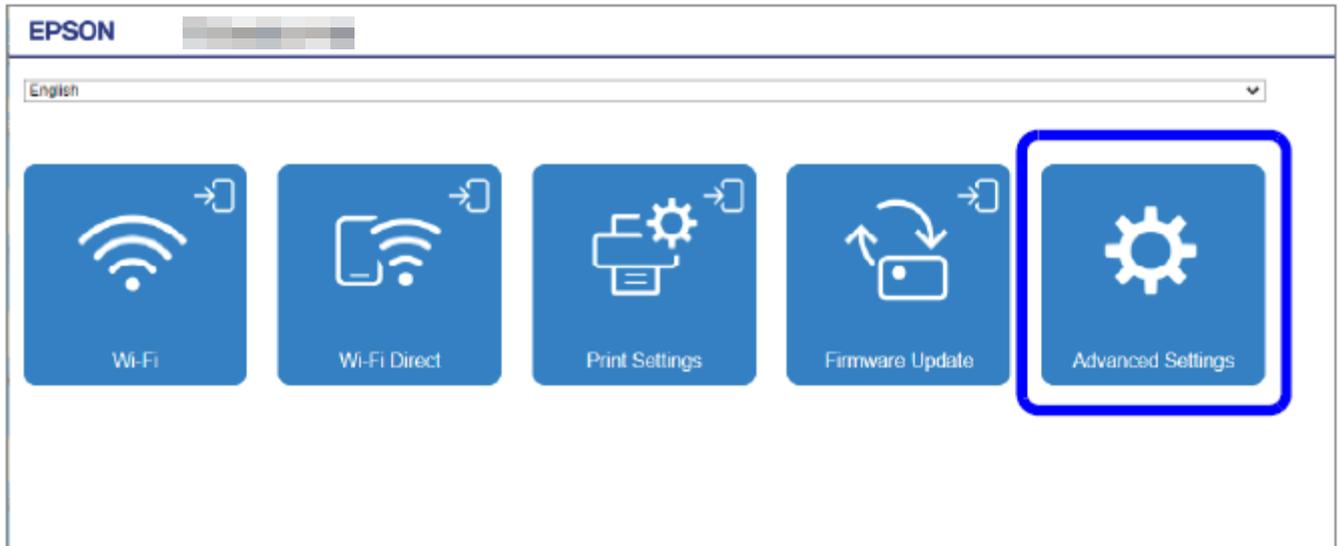

3. Select [Administrator Login].

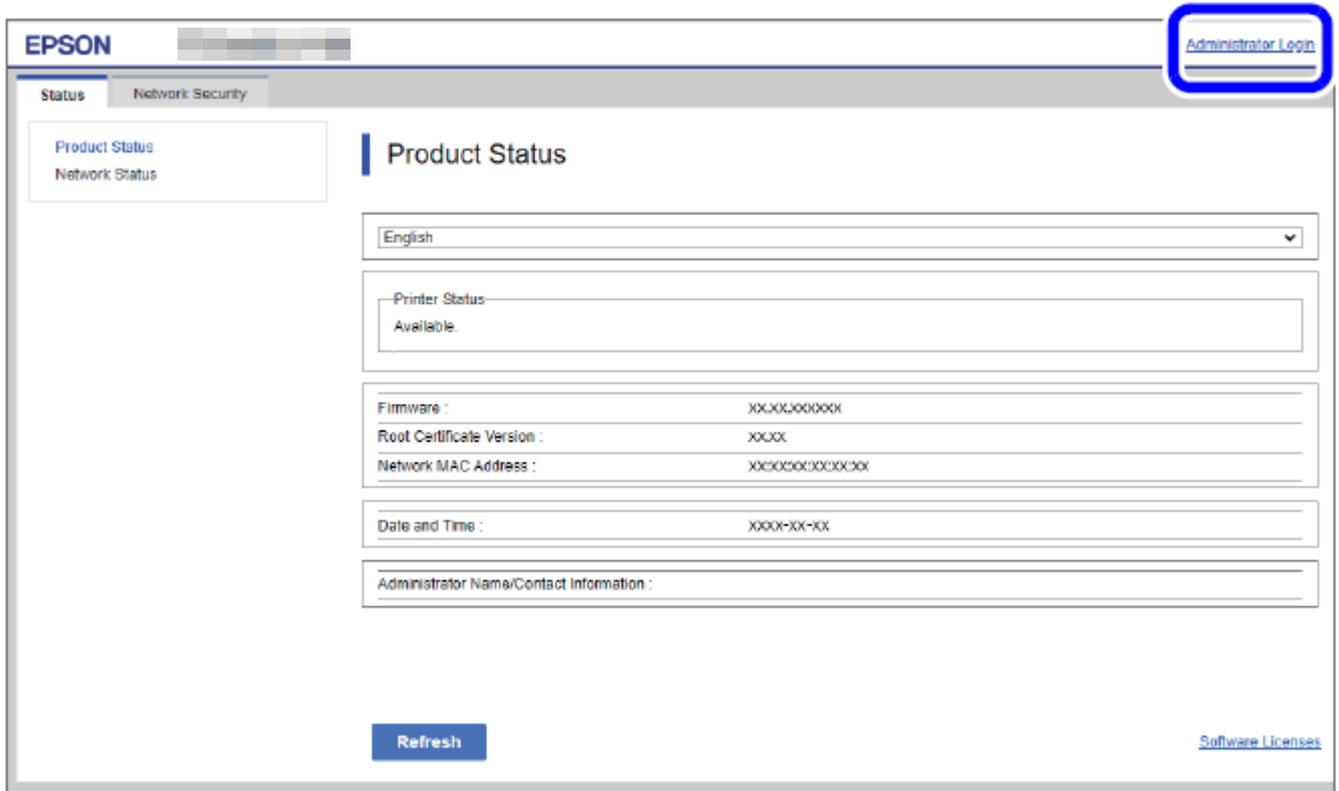

4. When the authentication screen appears, enter your password and log in.

The default password is the serial number of the printer. You can find the serial number by running the self-test or on the nameplate attached to the printer.

**NOTE**

Enable JavaScript in your browser. Because a self-signed certificate owned by the printer is used when accessing HTTPS, a warning will appear in the browser when Web Config is started.

Printers

This document covers WebConfig for the following printers.

- TM-P20II
- TM-P80II
- TM-m30III
- TM-m30III-H
- TM-m50II
- TM-m50II-H

For more information about the functions of each printer, see Chapter 12, "List of Functions by Model".

TABLE OF CONTENTS

Cautions.....	2
Trademarks	2
About this Manual.....	2
Key to Symbols.....	2
Using Web Config.....	3
How to Start Web Config.....	3
Printers	4
TABLE OF CONTENTS.....	5
1. Introduction.....	9
1.1 Definitions.....	9
1.2 Terminologies.....	9
2. Supported Web Browsers.....	10
3. Layout	10
3.1 Basic Settings Page	10
3.1.1 Configuration for Smartphones.....	10
3.1.2 Configuration for PC.....	11
3.2 Advanced Settings Page	12
4. Language.....	13
4.1 Supported Languages	13
4.2 Spec of Language.....	13
5. Top Page.....	13
5.1 URL	13
5.2 JavaScript	13
6. Administrator Password Settings.....	14
6.1 Top Page.....	14
6.1.1 Image.....	14
6.1.2 Setting Items	14
6.1.3 Button.....	15
7. User Authentication	16
7.1 Authentication Method.....	16
7.2 Pages Always can be Accessed	16
7.3 Log on Page.....	17
7.3.1 Image.....	17
7.3.2 Input Items.....	17
7.3.3 Button.....	17
7.4 Log on Failure Page	18
7.4.1 Image.....	18
7.4.2 Result	18
8. Common Specifications.....	19
8.1 Password Entry Field	19
9. Basic Settings Page.....	20
9.1 Log on Page.....	20
9.1.1 Top Page.....	20
9.1.1.1 Image.....	20
9.1.1.2 Display Language Setting.....	21
9.1.1.3 Link Items	21
9.2 Log on Page.....	22
9.2.1 Image.....	22
9.2.2 Input Items.....	22
9.2.3 Button.....	22
9.3 Log on Failure Page	23
9.3.1 Image.....	23
9.3.2 Result	23
9.4 Wi-Fi Page	24
9.4.1 Top Page.....	24
9.4.1.1 Image.....	24
9.4.1.2 Setting Items	24
9.4.1.3 Button.....	24

9.4.2	SSID Setting Page	25
9.4.2.1	Image.....	25
9.4.2.2	Setting Items.....	25
9.4.2.3	Button.....	25
9.4.3	Result Page	26
9.4.3.1	Image.....	26
9.4.3.2	Setting Result.....	26
9.4.3.3	Button.....	26
9.5	Wi-Fi Direct Page	27
9.5.1	Top Page.....	27
9.5.1.1	Image.....	27
9.5.1.2	Setting Items.....	27
9.5.1.3	Buttons.....	27
9.5.2	Result Page	28
9.5.2.1	Image.....	28
9.5.2.2	Setting Result.....	28
9.5.2.3	Button.....	28
9.6	Print Settings Page.....	29
9.6.1	Top Page.....	29
9.6.1.1	Image.....	29
9.6.1.2	Setting Items.....	29
9.6.1.3	Buttons.....	30
9.6.2	Result Page	31
9.6.2.1	Image.....	31
9.6.2.2	Setting Result.....	31
9.6.2.3	Button.....	31
9.7	Firmware Update Page	32
9.7.1	Top Page.....	32
9.7.1.1	Image.....	32
9.7.1.2	Display Items.....	32
9.7.1.3	Description	32
9.7.1.4	Buttons.....	32
9.7.2	Firmware Search Process Page	33
9.7.2.1	Image.....	33
9.7.2.2	Description Items.....	33
9.7.2.3	Button.....	33
9.7.3	Before Update Confirm Page.....	34
9.7.3.1	Image.....	34
9.7.3.2	Description	34
9.7.3.3	The Information of the Firmware Update	34
9.7.3.4	Buttons.....	34
9.7.4	Cancel Process Page	35
9.7.4.1	Image.....	35
9.7.4.2	Description	35
9.7.4.3	Button.....	35
9.7.5	Result Page	35
9.7.5.1	Image.....	35
9.7.5.2	Setting Result.....	36
9.7.5.3	Button.....	36
9.8	Advanced Setting Link.....	36
9.9	Cloud Services	37
9.9.1	Top page.....	37
9.9.1.1	Cloud Services Disabled State.....	37
9.9.1.2	Cloud Services Enable State.....	38
9.9.1.3	Cloud Services Changing State.....	40
9.9.2	Result page	41
9.9.2.1	Image.....	41
9.9.2.2	Setting Result.....	41
9.9.2.3	Button.....	41
10.	Advanced Settings Page.....	42
10.1	Status	42
10.1.1	Product Status	42
10.1.1.1	Top Page.....	42
10.1.2	Network Status.....	46
10.1.2.1	Top Page.....	46
10.1.3	TM-Intelligent	52
10.1.3.1	Top page.....	52
10.2	Print.....	53
10.2.1	Print Settings.....	53
10.2.1.1	Top Page.....	53
10.2.1.2	Result Page	55

10.2.2	Secure Printing	56
10.2.2.1	Top Page.....	56
10.2.2.2	Result Page	57
10.3	Network	58
10.3.1	Network Basic	58
10.3.1.1	Top Page.....	58
10.3.1.2	Confirm Page	63
10.3.1.3	Result Page	64
10.3.2	Wi-Fi	65
10.3.2.1	Top Page.....	65
10.3.2.2	SSID Search Page	66
10.3.2.3	Wi-Fi Settings Page	66
10.3.2.4	Confirm Wi-Fi Setup Page.....	68
10.3.2.5	Result Page	69
10.3.3	Wired LAN	70
10.3.3.1	Top page.....	70
10.3.3.2	Confirm page	70
10.3.3.3	Result page	71
10.3.4	Wi-Fi Direct	72
10.3.4.1	Top Page.....	72
10.3.4.2	Confirm Page	74
10.3.4.3	Result Page	75
10.4	Network Security	76
10.4.1	Protocol.....	76
10.4.1.1	Top Page.....	76
10.4.1.2	Confirmation Page	81
10.4.1.3	Result Page	82
10.4.2	CA Certificate	83
10.4.2.1	Top Page.....	83
10.4.2.2	Import Page.....	85
10.4.2.3	Result Page	86
10.4.3	Root Certificate Update	87
10.4.3.1	Top Page.....	87
10.4.3.2	Progress Page	88
10.4.3.3	Result Page	88
10.4.4	SSL/TLS.....	90
10.4.4.1	Basic	90
10.4.4.2	Certificate	93
10.4.4.3	Automatic Certificate Update.....	107
10.4.5	IPsec/IP Filtering	110
10.4.5.1	Basic	110
10.4.5.2	Client Certificate	125
10.4.6	IEEE802.1X.....	137
10.4.6.1	Basic	137
10.4.6.2	Client Certificate	144
10.5	Product Security.....	155
10.5.1	Password Encryption.....	155
10.5.1.1	Top Page.....	155
10.5.1.2	Result Page	155
10.5.2	Audit Log.....	157
10.5.2.1	Top Page.....	157
10.5.2.2	Result Page	158
10.5.3	Change Administrator Password	159
10.5.3.1	Top Page.....	159
10.5.3.2	Result Page	161
10.6	Device Management	162
10.6.1	Export and Import Setting Value	162
10.6.1.1	Export/Import Category	162
10.6.1.2	Export	163
10.6.1.3	Import.....	166
10.6.2	Firmware Update.....	172
10.6.2.1	Top Page.....	172
10.6.2.2	Firmware Search Process Page	173
10.6.2.3	Before Update Confirm Page.....	174
10.6.2.4	Cancel Process Page	175
10.6.2.5	Result Page	176
10.6.3	Administrator Name / Contact Information	177
10.6.3.1	Top Page.....	177
10.6.3.2	Result Page	177
10.6.4	Date and Time	178

10.6.4.1	Display Format	178
10.6.4.2	Date and Time	180
10.6.4.3	Time Difference	182
10.6.4.4	Time Server	184
10.7	Cloud Services	189
10.7.1	Basic	189
10.7.1.1	Top Page	189
10.7.1.2	Result Page	190
10.7.2	Auto Connection	191
10.7.2.1	Top Page	191
10.7.2.2	Result Page	192
10.8	No Menu	193
10.8.1	Firmware Update by Post Method	193
10.8.1.1	URL	193
10.8.1.2	Screen	193
10.8.1.3	Setting Items	194
10.8.1.4	Button	194
10.8.1.5	Result	194
10.8.1.6	Supported platforms and web browsers	194
10.8.1.7	Error	194
11.	TM-i Settings	195
11.1	Basic	195
11.1.1	Image	195
11.1.2	Display Items	195
11.2	Printer	196
11.2.1	Image	196
11.2.2	Display Items	196
11.3	ePOS-Print	197
11.3.1	Image	197
11.3.2	Display Items	197
11.4	ePOS-Device	198
11.4.1	Image	198
11.4.2	Display Items	198
11.5	Server Direct Print	199
11.5.1	Image	199
11.5.2	Display Items	199
11.6	Status Notification	200
11.6.1	Image	200
11.6.2	Display Items	200
11.7	Proxy	201
11.7.1	Image	201
11.7.2	Display Items	201
11.8	Reset	202
11.8.1	Image	202
11.8.2	Display Items	202
11.9	Help	203
11.9.1	Image	203
11.9.2	Display Items	203
12.	List of Functions by Model	204

1. Introduction

This guide is applied to the EPSON Web Config function (hereafter called “Web Config”).

1.1 Definitions

In this guide, words and phrases enclosed in double-quotation marks (“”) are strings that are shown in Web Config.

1.2 Terminologies

Table 1-1 Terminologies

Terms	Definitions
Button	HTML element that allows a user to execute an action by pressing it.
Text box	HTML element that shows some text or allows a user to edit text. There are two types of text boxes (read-only/read-write)
Check box	HTML element that allows a user to choose multiple items from several options.
Tab	HTML element that allows a user to choose one document from multiple documents.
Radio button	HTML element that allows a user to choose one item from provided options.
Drop-down list	HTML element that allows a user to choose one item from a Drop-down option list.
Frame	HTML element that is used to divide a page into multiple areas.
File button	HTML element that allows a user to open a window to select a file.
Red	Color defined as RGB (255, 80, 0) and used as 'CUD-Red' on Web Config.
UTF-8	One of the character codes that can be entered in a Web browser. A character code from 1 to 3 bytes is used to express one character. Although there is an exception in which 4-byte surrogate pairs are treated as one character, these single characters are counted as two characters in internal processing.
UTF-16	One of the character codes that can be entered in a Web browser. Characters that exceed the value of 0x010000 in UTF-16 are called surrogate pairs. They are single characters that are counted as two characters.

2. Supported Web Browsers

Web Config supports the following platforms and web browsers.

Table 2-1 Supported Web Browsers

Platforms	Web Browsers
Windows 11, Windows 10, Windows 8.1, Windows 8, Windows 7	IE8, IE9, IE10, IE11, Edge, Firefox, Chrome
Mac OS X (10.6.8,10.7.x,10.8.x,10.9.x,10.10.x, 10.11.x,10.12.x,10.13.x,10.14.x)	Safari, Firefox, Chrome
Chromebook	Default browser


3. Layout

This section describes the page layout of Web Config.

3.1 Basic Settings Page


3.1.1 Configuration for Smartphones

If the width of the display device is 700px or less, it will be displayed in the configuration for smartphones.

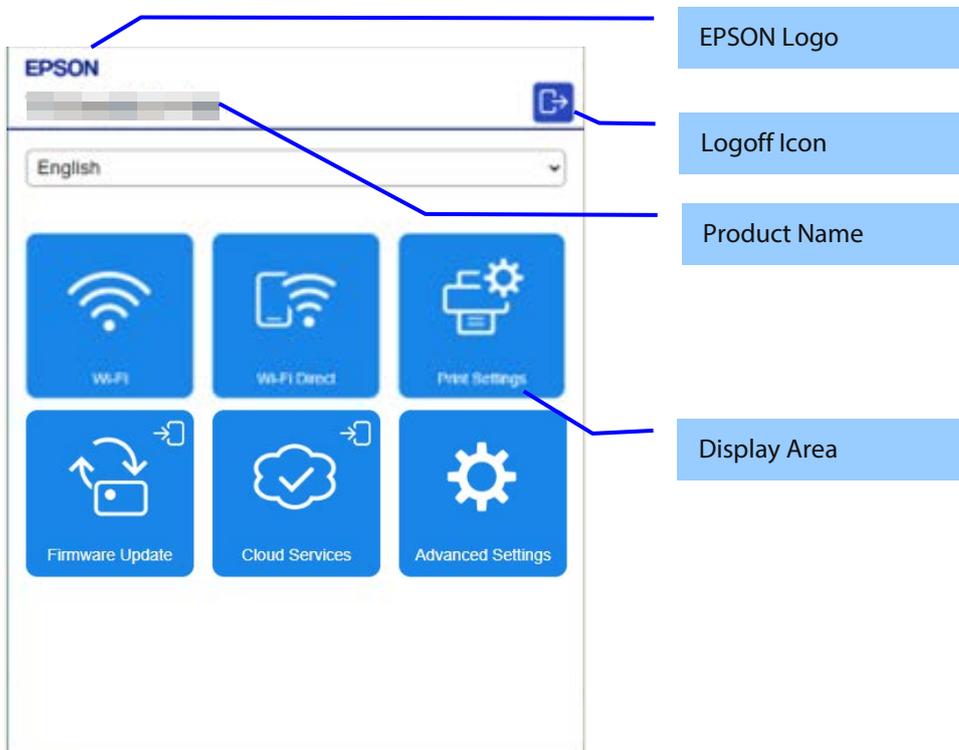

3.1.2 Configuration for PC

If the width of the display device is larger than 700px, it will be displayed in the configuration for PC.

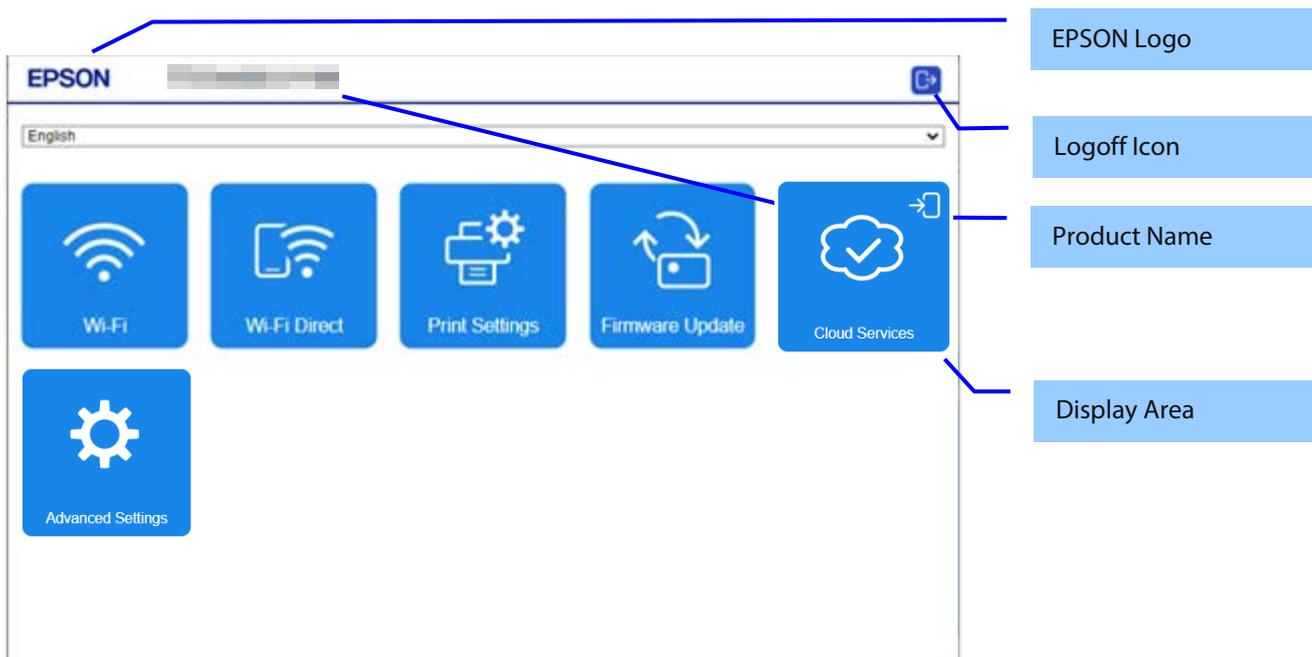

Parts	Description
EPSON Logo	Displays an image of the EPSON Logo. Click the EPSON Logo to access the top page of Web Config. The top page cannot be accessed from the Firmware Update page (except for top page) even if pressed.
Product Name	Displays the product name.
Logoff Icon	A logoff icon is displayed when the administrator logs on. Click the logoff icon to access the Web Config top page after the administrator logs off.
Display Area	Displays device status and setting items. The entire page is scrolled if there is a large amount of information.

3.2 Advanced Settings Page

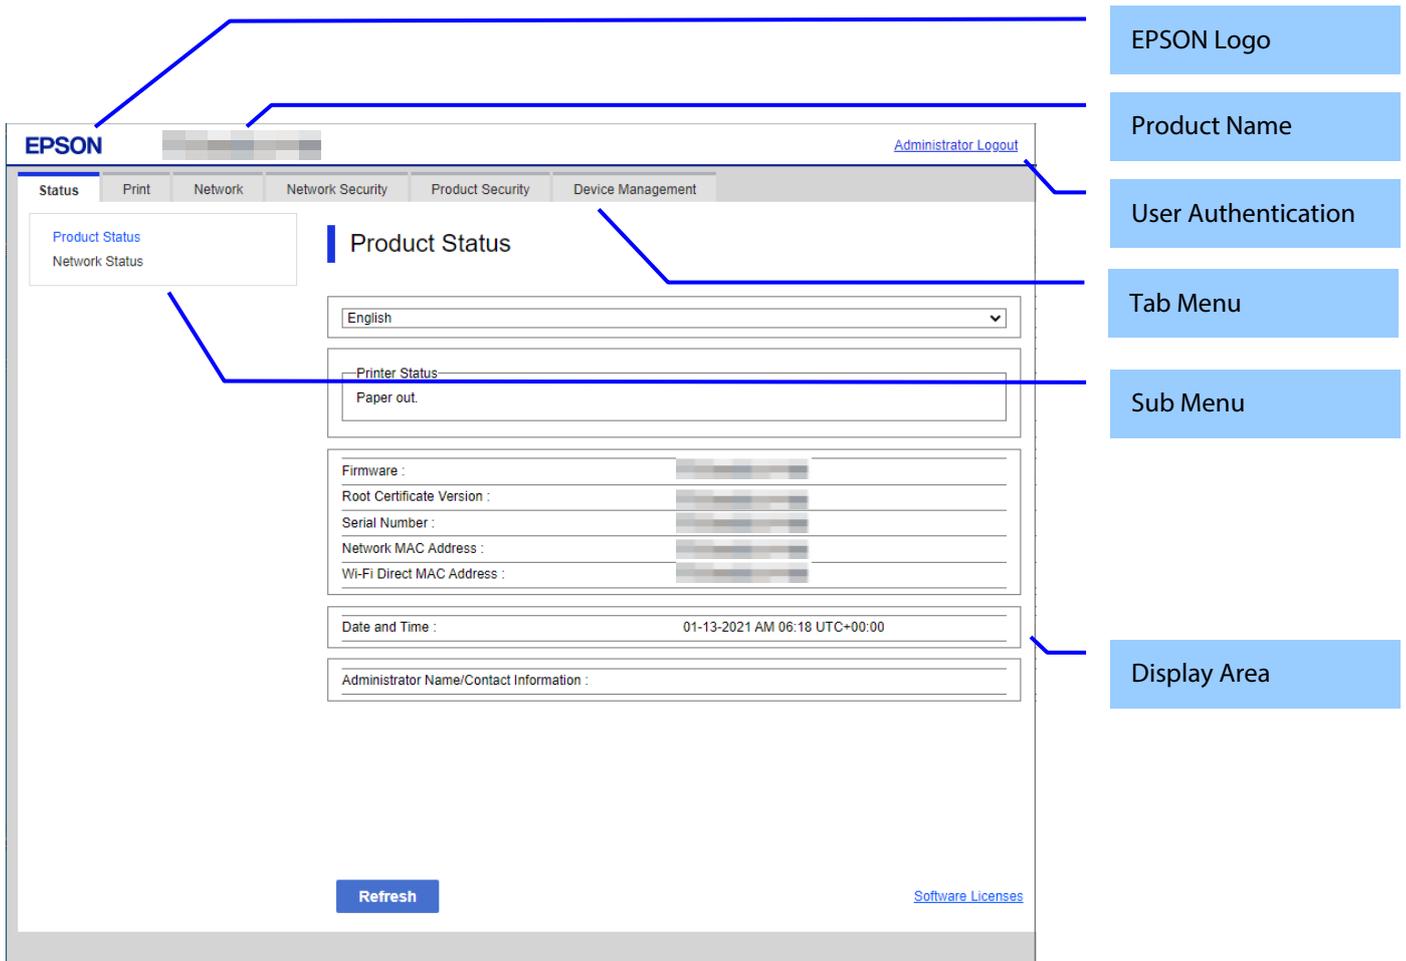


Figure 3-1 Layout

Table 3-1 Layout

Parts	Description
EPSON Logo	Displays an image of the EPSON Logo.
Product Name	Displays the product name.
User Authentication	This link allows the user to log on/off. When the user logs on, a page for entering authentication information is displayed. There are two links: "Logon" and "Logoff". When a user is logged on, that user's name is displayed to the left side of the link. ("Administrator" is displayed when an administrator is logged on.)
Tab Menu	Displays the main menu on tabs. The selected tab menu is highlighted.
Sub Menu	Displays the sub-menus for the selected tab menu. The selected sub-menu is highlighted.
Display Area	Displays the device status and setting items. Scroll down if there is too much information to fit in the window. Only the display area will scroll.

For more information about the Tab Menus and Sub-Menus shown on Web Config, refer to the Function Table.

4. Language

4.1 Supported Languages

Table 4-1 Supported Languages

SKU	Languages
All	Japanese / Basic English / French / German / Italian / Spanish / Portuguese

4.2 Spec of Language

Table 4-2 Spec of Language

Language	Condition
English	Before language setup on the Web Config
Language which is setup on the Web Config	After language setup on the Web Config

5. Top Page

5.1 URL

Web Config can be opened from the following URLs.

Table 5-1 URL access to Web Config

URL	Description
http(s)://(IP address or Device name*)/PRESENTATION/BASIC/HOME/TOP	Correct URL
http(s)://(IP address or Device name*)	Redirect to correct URL

*The device name must be registered with a DNS.

If the function for redirecting to HTTPS is enabled, HTTP access is redirected to HTTPS access. Since the device uses the self-signed certificate that is stored in the device for HTTPS access by default, a warning message will be shown in the web browser. The user can change the self-signed certificate to any server certificate in the SSL/TLS settings on Web Config.

5.2 JavaScript

Even if JavaScript is disabled in the web browser's preferences or options settings, the top page is displayed and the user can transition to each page from the sub-menu on the left. However, the display area and the operation buttons are limited to some extent, and therefore the message "Enable the browser's JavaScript setting." is displayed above the tabs.

6. Administrator Password Settings

When accessing Web Config, if the administrator password has not been set, go to the Set Administrator Password page.

6.1 Top Page

6.1.1 Image

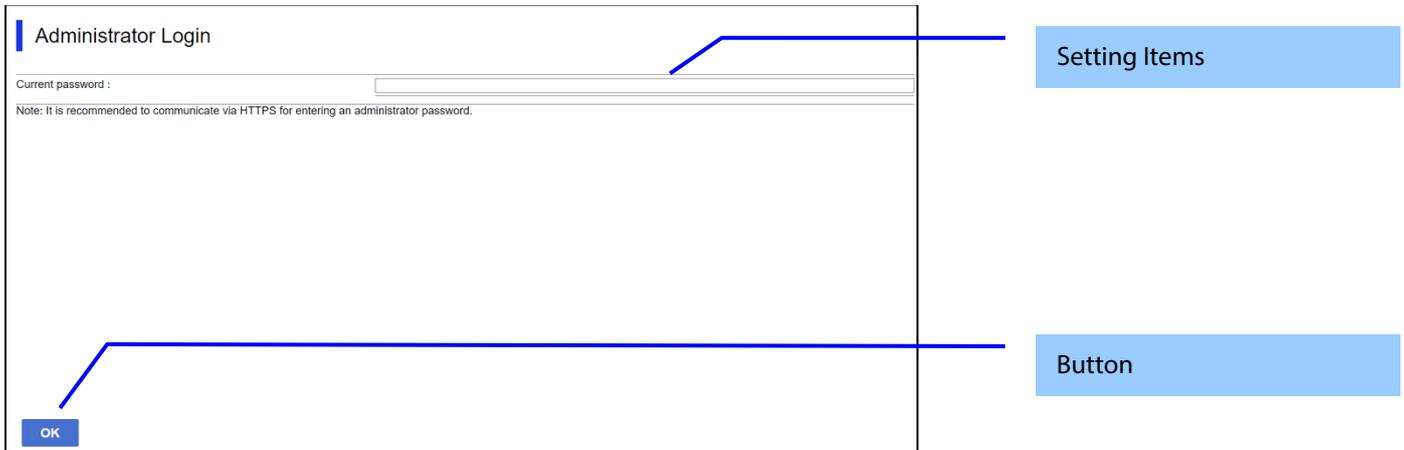


Figure 6-1 Administrator Password Settings

6.1.2 Setting Items

The following table shows the items on the page.

Table 6-1 Setting Items

Items	Description	Condition
"User Name"	Text box for entering the current user's name. Usable string: ASCII code (0x20-0x7E) from 0 to 20 characters.	Displayed only for models on which the administrator user name can be set.
"Enter between 0 and 20 characters. "	Message for entering characters.	Displayed only for models on which the administrator user name can be set.
"New Password"	Text box for entering a new password. Usable string: ASCII code (0x20-0x7E) Max. 20 characters. However, the password setting will fail if it violates the password policy.	-
"Enter between %d and 20 characters. "	A message for inputting characters. <ul style="list-style-type: none"> ● UK PSTI Bill and ISO15408 corresponding model Display "1~20 characters" if "Password Policy" is selected in "Enable". Display "8~20 characters" if "Password Policy" is selected in "Disable". ● UK PSTI Bill corresponding only model "8~20 characters" ● ISO15408 corresponding only model ● Other models "1~20 characters" 	-
"Confirm New Password"	Text box for confirming the entered password. Usable string: ASCII code (0x20-0x7E) Max. 20 characters.	-
"Note: It is recommended to communicate via HTTPS for entering an administrator password. "	Fixed strings	-

6.1.3 Button

The following table shows the buttons on the page.

Table 6-2 Button

Items	Description
"OK"	- The entered value is checked when this button is pressed.

When the "OK" button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 6-3 Error Pop-up

Items	Description
"Invalid value below."	When the format of the entered user name or password is not correct, this message is shown.
"Password and confirm password do not match."	When new password and the confirmation password do not match, this message is shown.

7. User Authentication

7.1 Authentication Method

Web Config uses the administrator user name and password to perform user authentication. This same password is also used for locking the device's control panel and for EpsonNet Config password authentication. If a password is not configured, administrator rights are granted for all access to Web Config. The various states of administrator authentication are shown below.

Table 7-1 Administrator authentication state

	Administrator user name is configured	Administrator user name is not configured
Administrator password is configured	Authentication is requested.	Authentication is requested. However, the administrator is not required to enter a user name.
Administrator password is not configured	Transit to "Administrator Password Setting" page.	Displays the "Set Administrator Password" page.

7.2 Pages Always can be Accessed

The following pages are accessible all the time regardless of the administrator's logon status.

Table 7-2 Pages Always can be Accessed

Tab menu	Sub menu
Status	Product Status (contains Software Licenses)
	Network Status
	sage Status
	Hardware Status

7.3 Log on Page

7.3.1 Image

The following figure shows the layout of the logon page.

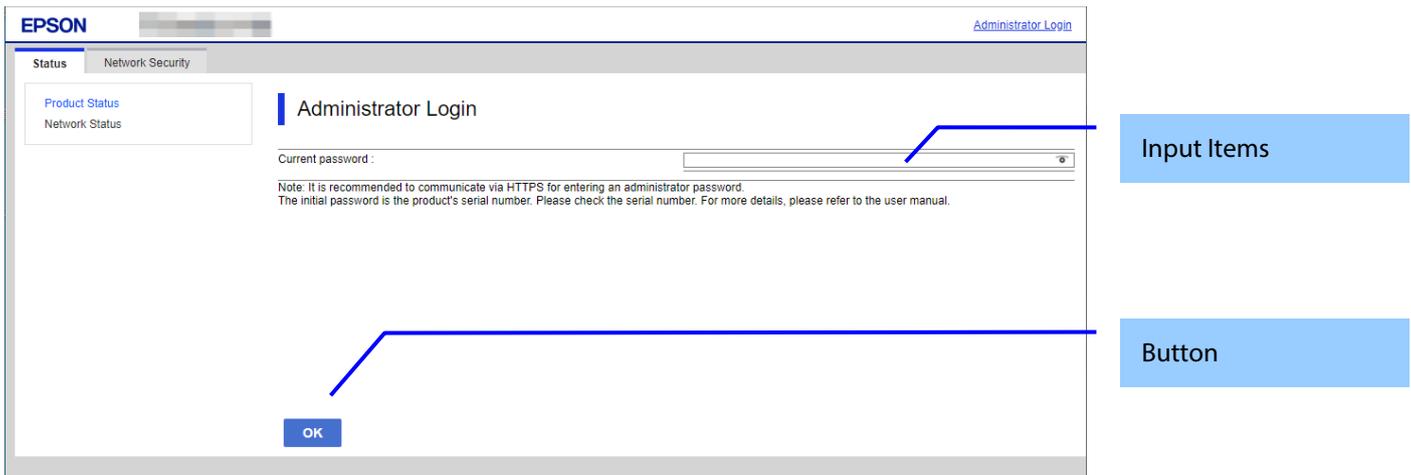


Figure 7-1 Log on Page

7.3.2 Input Items

Table 7-3 Input Items

Items	Description	Conditions
"Current password"	Text box for entering the current password. The entered value is masked with '*'. If the Enter key is pressed while the cursor is in this text box, the same process as when the OK button is pressed is performed.	-
"Note: It is recommended to communicate via HTTPS for entering an administrator password."	Comment	-
"The initial password is provided on the label attached to the product. For more details, please refer to the user manual."	Comment	For models supporting the UK PSTI Bill. The initial password is provided on the label attached to the product. For more details, please refer to the user manual.
"The initial password is the product's serial number. Please check the serial number. For more details, please refer to the user manual."	Comment	For models not supporting the UK PSTI Bill. The initial password is the product's serial number. Please check the serial number. For more details, please refer to the Technical Reference Guide.

7.3.3 Button

Table 7-4 Button

Items	Description
"OK"	Button for logging on. After the user logs on, the Product Status page on the Status tab is displayed.


The Administrator logon page is displayed in the following cases.

- User authentication link clicked
- Direct access to a page that requires logging on
- Web Config accessed 20 min. or longer since the previous time
- Accessing Web Config while currently logged on as an administrator in another web browser

7.4 Log on Failure Page

If logon fails, the logon page is displayed with the authentication results. At this time, the password field is left blank.

7.4.1 Image

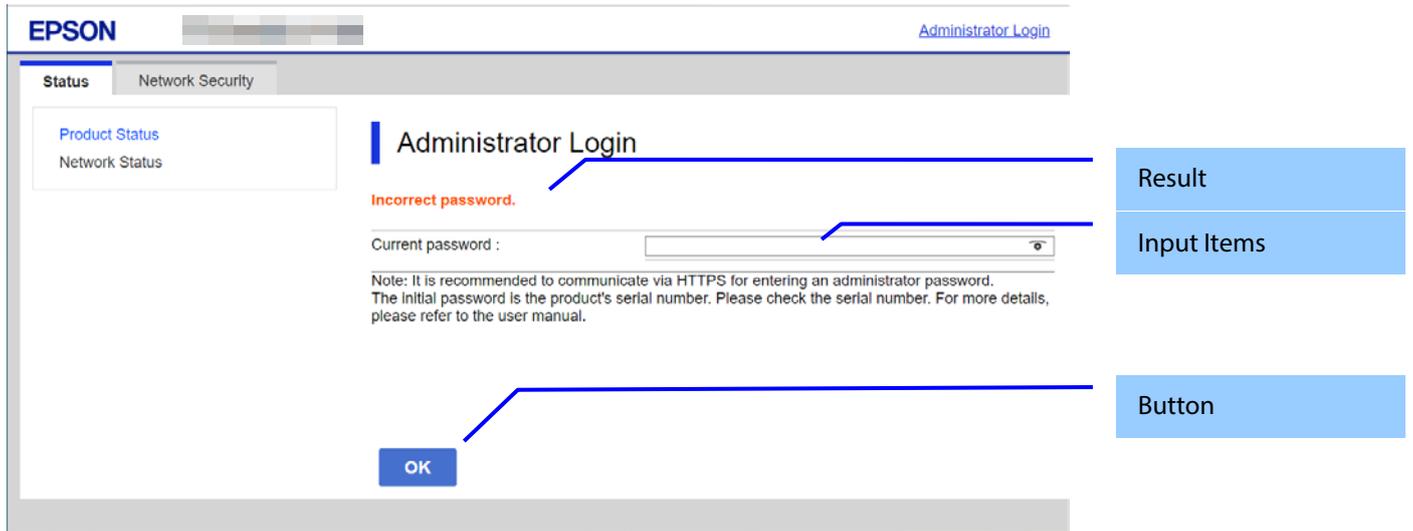

7.4.2 Result

Table 7-5 Setting Result

Items	Description
"Incorrect password. "	This message is shown when the entered password is incorrect. This item is displayed in red letters. This item is displayed when administrator logon fails on devices that do not support user names.
"Authentication failed. " "Try again later. "	This message is displayed when registered user logon fails. This item is displayed in red letters.

8. Common Specifications

8.1 Password Entry Field

The common specifications for password entry fields are shown below.

- Entered characters are masked. To use textbox, specify the “password” attribute for “type”.
- When a password is set, 10 asterisks (*) are used for the “value” attribute for the textbox.
- If no password is entered, nothing is entered for the “value” attribute for the textbox. However, in some cases 10 asterisks (*) are displayed even if no password is entered. These conditions are detailed in the description for each item.
- If 10 asterisks are entered for the password, the password is not changed.
- User The user can change display/hideselect to display or hide the input password to by clicking the eye icon which is located on the right of textbox.


9. Basic Settings Page

9.1 Log on Page

9.1.1 Top Page


9.1.1.1 Image

9.1.1.1.1 Configuration for Smartphones

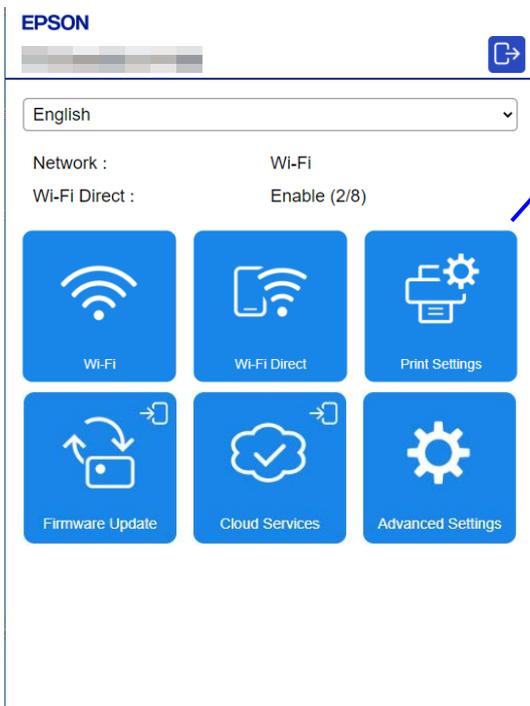

Display Items

9.1.1.1.2 Configuration for PC

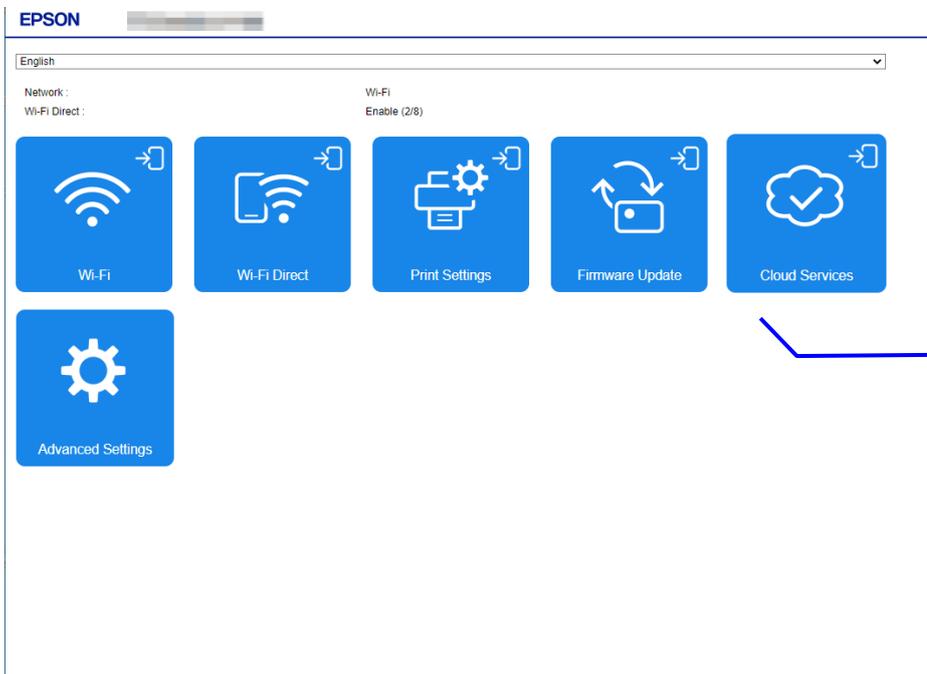

Display Items

9.1.1.2 Display Language Setting

Items are displayed when multiple display languages are supported.


The language specification is in accordance with section 4, Language. After choosing a language, it is reflected enabled immediately and the page is changed based on the selected language.

9.1.1.3 Link Items

Link items are displayed in the form of square buttons. The layout for smartphones is 3 x N, the layout for PCs is 5 x N.

A logon icon is displayed at the upper right of the button for link items that are not logged on and require logging on.

If the length of the item name exceeds the width of the square button, the ellipsis "..." is displayed.

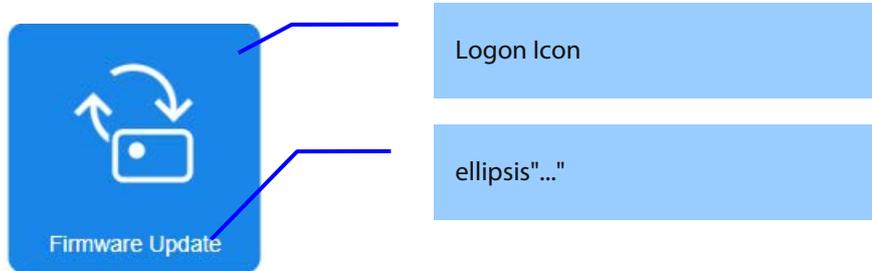

Items	Description	Condition
"Wi-Fi"	Access the top page of Wi-Fi Settings	-
"Wi-Fi Direct"	Access the top page of Wi-Fi Direct Settings	-
"Printer Settings"	Access the top page of Printer Settings	
"Firmware Update"	Access the top page of the Firmware Update	
"Cloud Services"	Access the top page of Cloud Services Settings	
"Advanced Settings"	Access the top page of Advanced Settings	

If you press a link item with the logon icon displayed, first access the logon page, and if log on is successful, access each top page.

9.2 Log on Page

9.2.1 Image

The following figure shows the layout of a log on page.

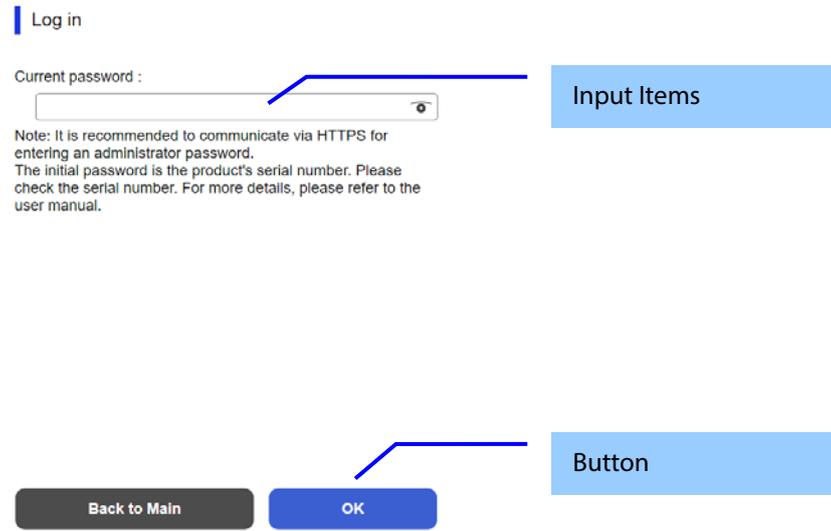


Figure 9-1 Log on Page

9.2.2 Input Items

Table 9-1 Input Items

Items	Description	Conditions
"Current password"	A text box to the input current password. The input value is masked with '*'. Pressing the Enter key with the cursor in this text box performs the same processing as when pressing the OK button. When  is pressed, the input value is displayed. When  is pressed, the input value is masked with '*'.	-
"Note: It is recommended to communicate via HTTPS for entering an administrator password."	Comment	-

9.2.3 Button

Table 9-2 Button

Items	Description
"OK"	Button for logging on. After logging on, the top page of each function is displayed.
"Back to Main"	Displays the main page.

Administrator logon page is shown in the following cases.


- When the user authentication link is clicked.
- Direct access to the page which requires logging on.
- Web Config access after 20 min. from last access.
- During administrator logon, Web Config access after administrator logon from other web browser.

9.3 Log on Failure Page

If log on fails, the log on page of the authentication results is displayed.

At this time, the user name is displayed with the previous input value remaining, and the password field is left blank.

9.3.1 Image

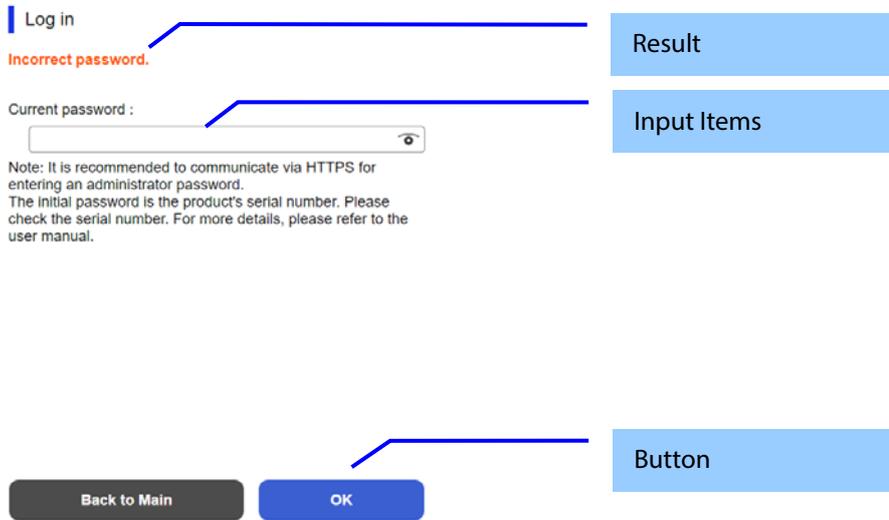

9.3.2 Result


Table 9-3 Setting Result

Items	Description
"Incorrect password. "	This message is shown when the entered password is incorrect. This item is displayed in red. This item is displayed on a device which does not support username and when administrator log on fails.
"Authentication failed." "Try again later. "	This message is shown when registered user log on fails. This item is displayed in red.

9.4 Wi-Fi Page

9.4.1 Top Page

9.4.1.1 Image

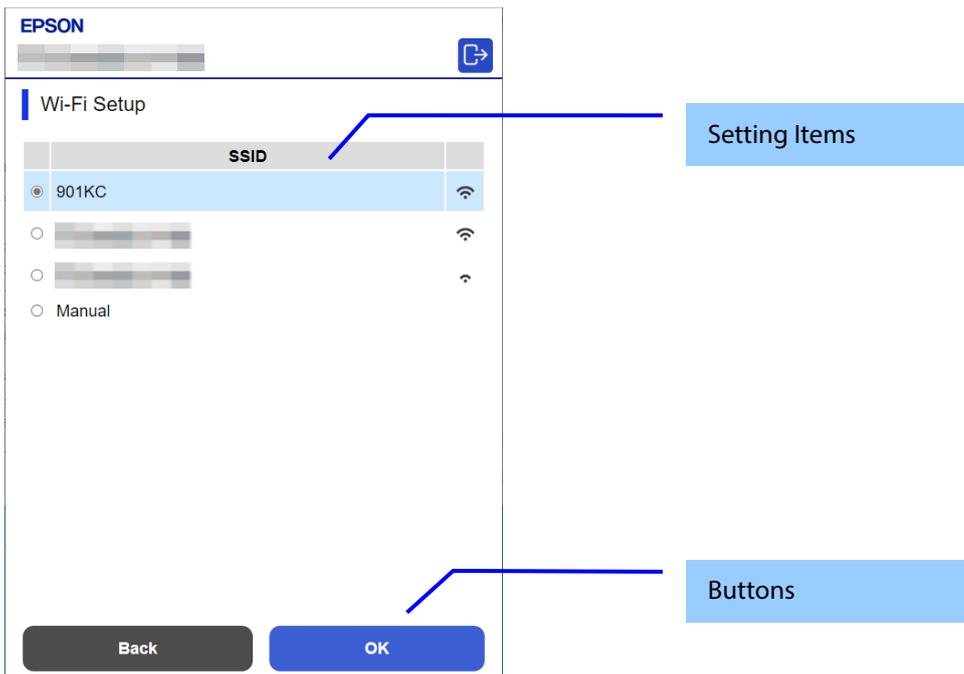

9.4.1.2 Setting Items

Table 9-4 Setting Items

Items	Description	Condition
"SSID"	Selects the SSID found in the SSID search and the manual option using the radio buttons.	-


9.4.1.3 Button

Table 9-5 Button

Items	Description	Condition
"OK"	Moves to the configuration page for SSID connection.	-
"Back"	Button to move to the main page.	-

9.4.2 SSID Setting Page

9.4.2.1 Image

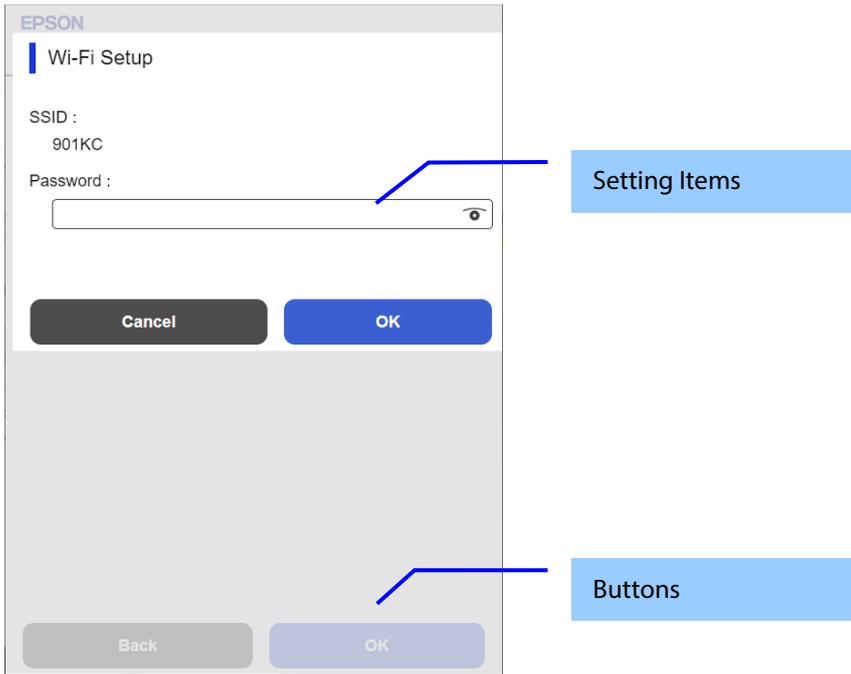

9.4.2.2 Setting Items

Table 9-6 Setting Items

Items	Description	Condition
"SSID"	If selected from a list, the selected SSID is displayed as a fixed string. If manual, use the text box to configure the settings.	-
"Password"	A text box is provided. The string must have 0, 5, or 8 to 63 characters. (ASCII codes: 0x20 - 0x7E) The input values are masked by '*'.	If the SSID selected from the search list has no password set, it is hidden.

9.4.2.3 Button

Table 9-7 Button

Items	Description	Condition
"OK"	Moves to the configuration page for SSID connection.	-
"Cancel"	Cancel the pop-up.	-

9.4.3 Result Page

9.4.3.1 Image

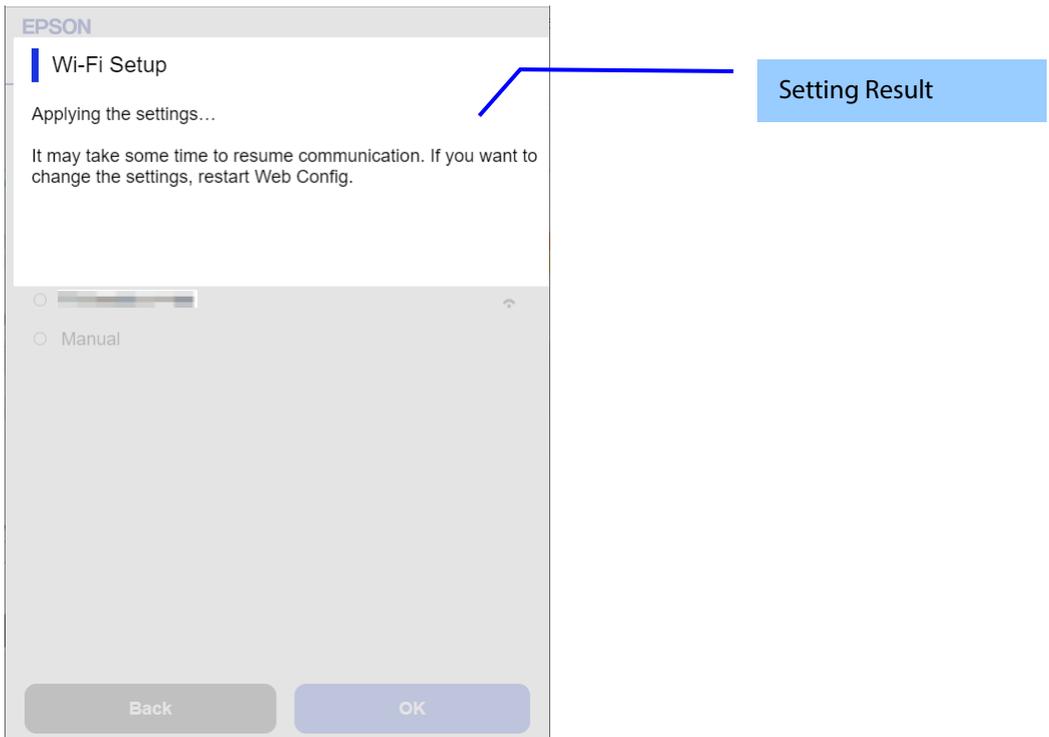


Figure 9-2 Result Page

9.4.3.2 Setting Result

Table 9-8 Setting Result

Items	Description
"Setup complete.¥n It may take some time to resume communication. If you want to change the settings, restart Web Config."	This text is shown if setup is successful.
"Setup failed."	This text is shown if setup fails.

9.4.3.3 Button


Table 9-9 Button

Items	Description	Condition
"Back to Main"	Button to change to the main page.	This button is displayed when setup fails.

9.5 Wi-Fi Direct Page

9.5.1 Top Page

9.5.1.1 Image

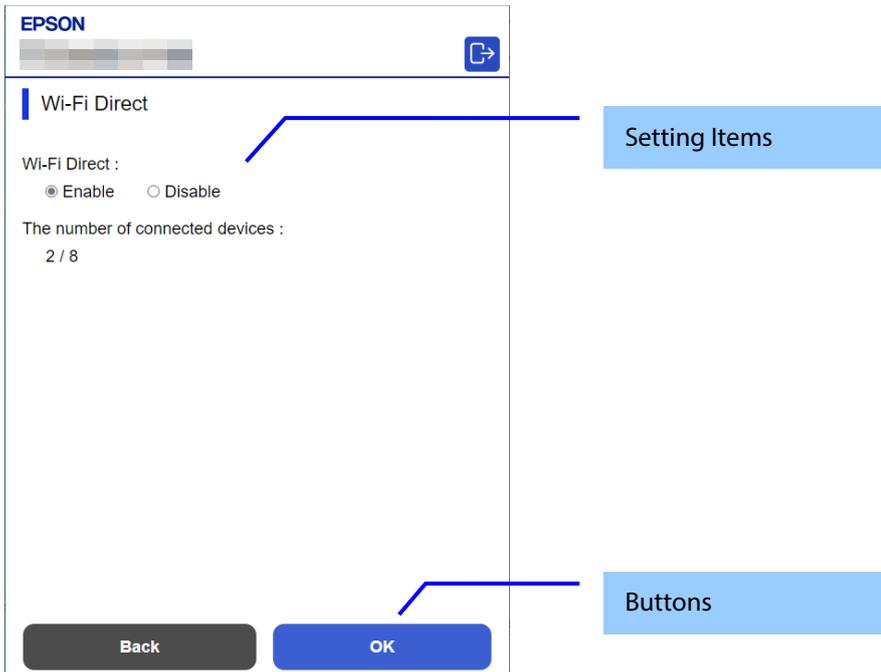

9.5.1.2 Setting Items

Table 9-10 Setting Items

Items	Description	Condition
"Wi-Fi Direct"	Two radio buttons are provided to choose either of the following: "Enable" / "Disable"	-
"The number of connected devices"	Displays the number of connected devices with Wi-Fi Direct. The number of connected devices/Max devices	This item is displayed when "Wi-Fi Direct" is "Enable".

9.5.1.3 Buttons

Table 9-11 Buttons

Items	Description	Condition
"Back"	Button to move to the main page.	-
"OK"	This button is to change the settings. When this button is pushed, Web Config is transferred to the setting results page.	-

9.5.2 Result Page

9.5.2.1 Image

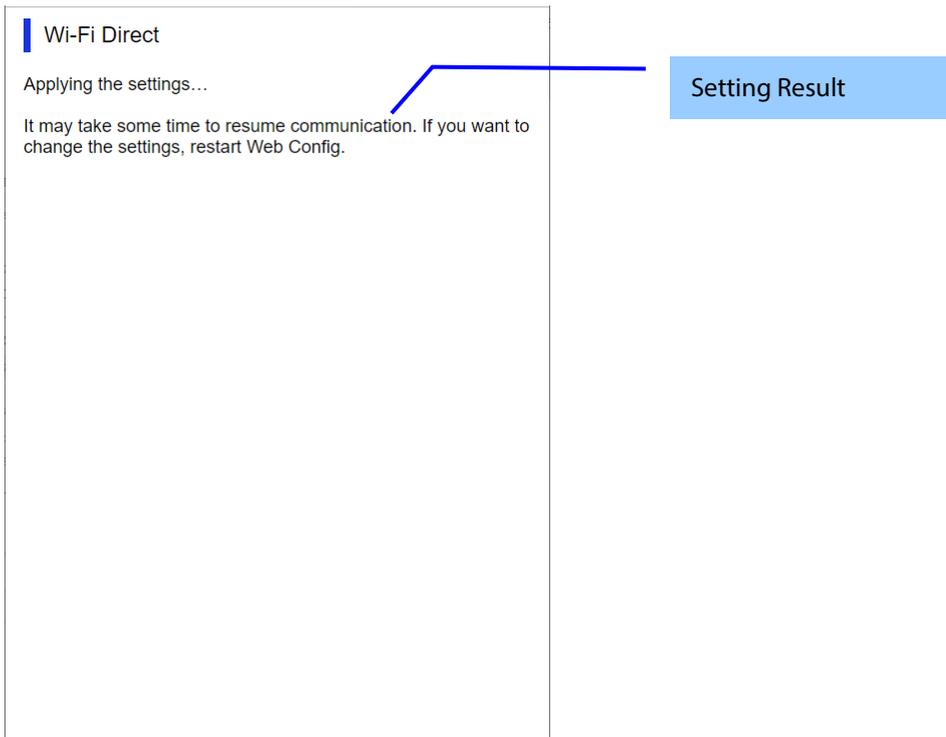


Figure 9-3 Result Page

9.5.2.2 Setting Result

Table 9-12 Setting Result

Items	Description
"Setup complete.¥n It may take some time to resume communication. If you want to change the settings, restart Web Config."	This text is shown if setup is successful.
"Setup failed."	This text is shown if setup fails.

9.5.2.3 Button

Table 9-13 Button

Items	Description	Condition
"Back to Main"	Button to change to the main page.	This button is displayed if setup fails.

9.6 Print Settings Page

9.6.1 Top Page

9.6.1.1 Image

The following figure shows the layout of the top page.

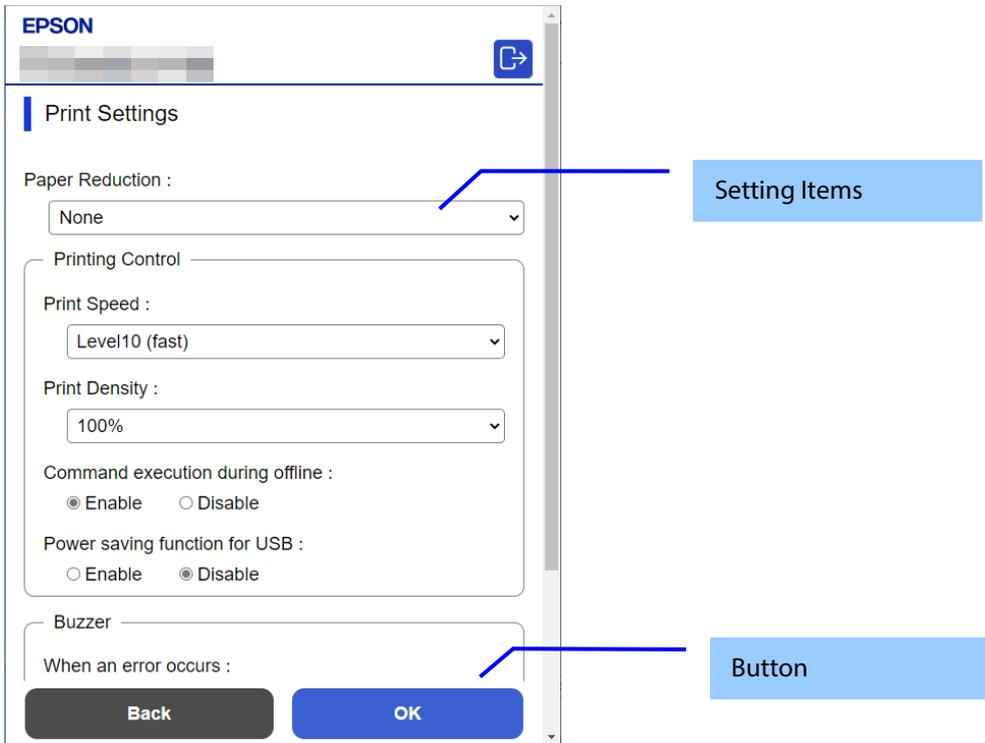


Figure 9-4 Image

9.6.1.2 Setting Items

Table 9-14 Setting Items

Items	Description	Condition
"Paper Reduction"	Use the drop-down list to select from the following options: "Max" / "Recommendation" / "None"	Displayed only on models that support paper reduction
"Printing Control"	Title	-
"Print Speed"	For models that support the maximum printing speed "Level10" Use the drop-down list to select from the following options: "Level1 (slow)" / "Level2" / "Level3" / "Level4" / "Level5" / "Level6" / "Level7" / "Level8" / "Level9" / "Level10 (fast)" For models that support the maximum printing speed "Level13" Use the drop-down list to select from the following options: "Level1 (slow)" / "Level2" / "Level3" / "Level4" / "Level5" / "Level6" / "Level7" / "Level8" / "Level9" / "Level10" / "Level11" / "Level12" / "Level13 (fast)" For models that support the maximum printing speed "Level17" Use the drop-down list to select from the following options: "Level1 (slow)" / "Level2" / "Level3" / "Level4" / "Level5" / "Level6" / "Level7" / "Level8" / "Level9" / "Level10" / "Level11" / "Level12" / "Level13" / "Level14" / "Level15" / "Level16" / "Level17 (fast)"	Displayed only on models that support print speed

"Print Density"	Use the drop-down list to select from the following options: "70%" / "75%" / "80%" / "85%" / "90%" / "95%" / "100%" / "105%" / "110%" / "115%" / "120%" / "125%" / "130%" * "125%" and "130%" are displayed only for models that support the maximum print density "130%".	Displayed only on models that support Print Density
"Command execution during offline"	User can select "Enable" / "Disable" by radio button.	Displayed only on models that support command execution during offline
"Power saving function for USB"	User can select "Enable" / "Disable" by radio button.	Displayed only on models that support the USB power saving function
"Buzzer"	Title	-
"Buzzer"	User can select "Optional Buzzer" / "Disable" by radio button.	This item is displayed on devices with a buzzer.
"When an erro occurs"	Use the drop-down list to select from the following options: "Off" / "Once" / "Continuous" * "Continuous" is displayed only for compatible models.	This item is displayed on devices with a buzzer.
"When auto paper cut is operating"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when performing automatic paper cut.
"When paper end occurs"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when paper end occurs.
"When battery level changed"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when the battery level changes.
"When specified pulse 1 (2 pin) occurs"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when specified pulse 1 (2 pin) occurs.
"When specified pulse 2 (5 pin) occurs"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when specified pulse 2 (5 pin) occurs.

9.6.1.3 Buttons

The following table shows the button on the page.

Table 9-15 Buttons

Items	Description
"Back"	Button to move to the main page.
"OK"	Button to start print settings. Press the button to display the reboot confirmation pop-up

If the Web Config recognizes an error in the input value after the "OK" button is pressed, the following reboot confirmation pop-up is shown.

Table 9-16 Reboot Confirmation Pop-up

Items	Description
"Product will be restarted to apply the settings."	Displayed when the "Set" button is pressed. Click the "OK" button in the pop-up to move the results page.

9.6.2 Result Page

The result message is shown in the main frame after the "OK" button is pressed.

9.6.2.1 Image

The following figure shows the layout of the results page.

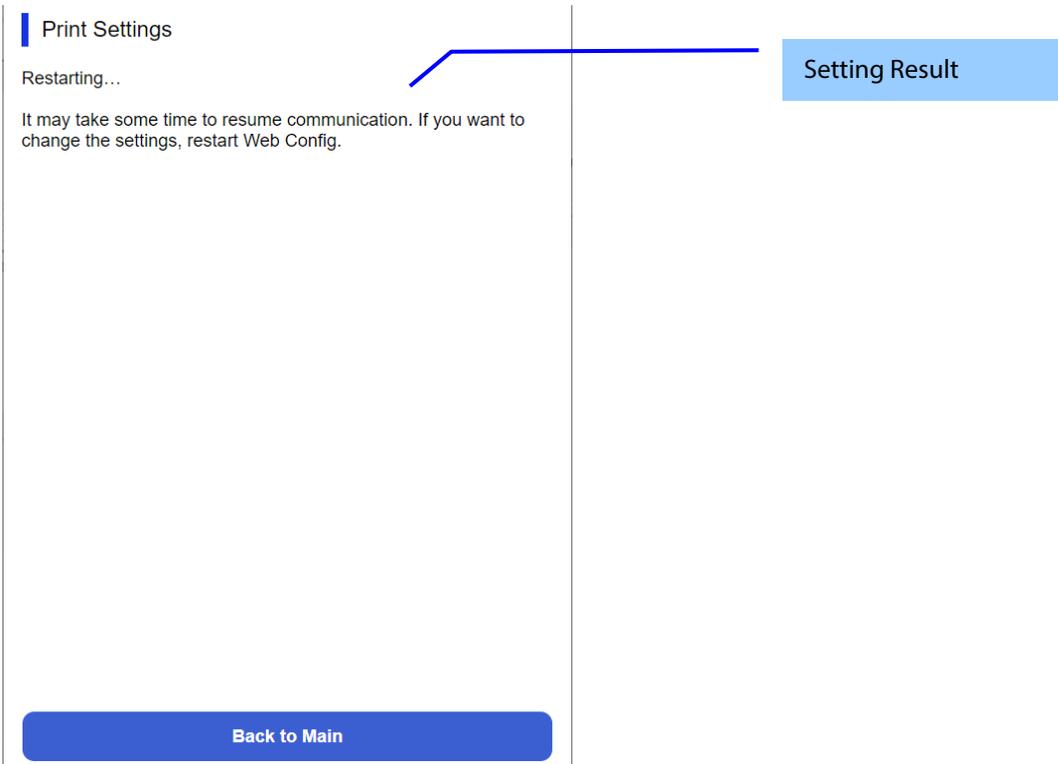


Figure 9-5 Image

9.6.2.2 Setting Result

Table 9-17 Setting Result

Items	Description
"Setup complete. It may take some time to resume communication. If you want to change the settings, restart Web Config."	This message is shown when the settings are completed successfully.
"Setup failed."	This message is shown if setup fails.
"Cannot access the product until processing is complete."	This message is shown when the setting is unavailable because the product is processing.

9.6.2.3 Button

Table 9-18 Button

Items	Description
"Back to Main"	Changes to the main page.

9.7 Firmware Update Page

9.7.1 Top Page

9.7.1.1 Image

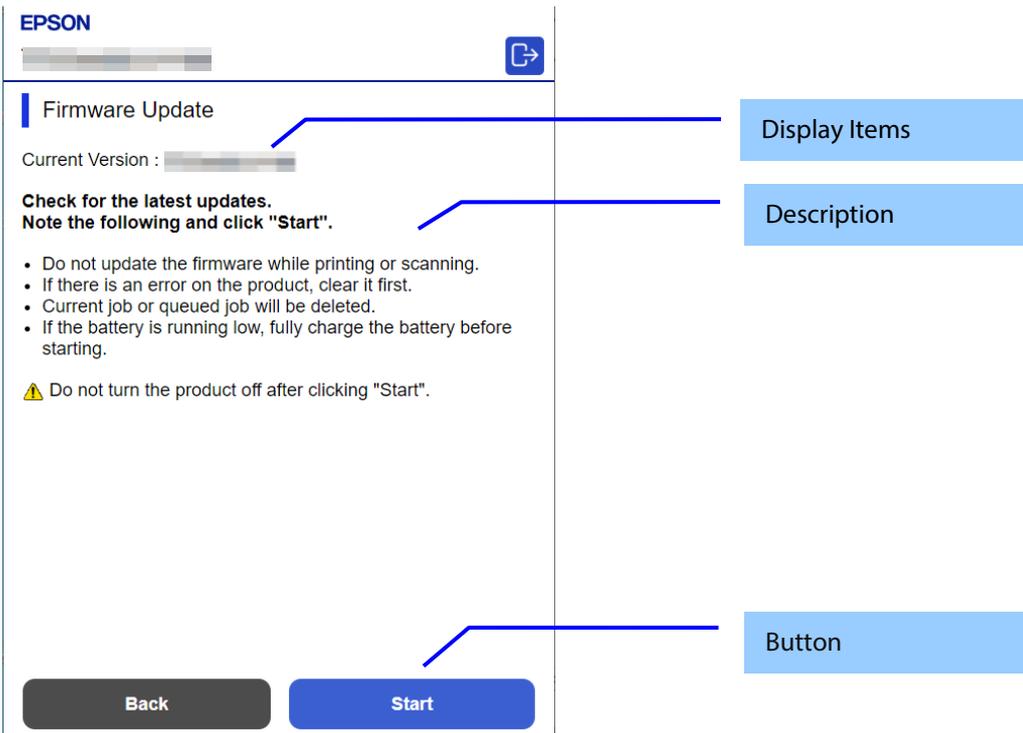


Figure 9-6 Top Page

9.7.1.2 Display Items

Table 9-19 Display Items

Items	Description
"Current Version"	Up to 12 characters in ASCII codes XX.YY.ZZZZZZ -XX: Linux Kernel version -YY: Linux Appli version -ZZZZZ: Main version

9.7.1.3 Description

Table 9-20 Description

Items	Description	Condition
"Check for the latest updates." "Note the following and click "Start"."	Fixed Strings	-
"Do not update the firmware while printing or scanning."	Fixed Strings	-
"If there is an error on the product, clear it first."	Fixed Strings	-
"Remove the roll paper if loaded. "	Fixed Strings	This message is shown on destinations with roll paper feed.
"Current job or queued job will be deleted."	Fixed Strings	-
"If the battery is low, charge it before starting."	Fixed Strings	This message is shown on models equipped with a battery.
"Do not turn the product off after clicking "Start"."	Fixed Strings The ! icon is shown in front of the string.	-

9.7.1.4 Buttons

Table 9-21 Buttons

Items	Description
"Back"	Button to move to the main page.
"Start"	Button to move to the firmware search page.

9.7.2 Firmware Search Process Page

The page is shown after the 'Start' button is pressed.
The following figure shows a layout of the firmware search page.

9.7.2.1 Image

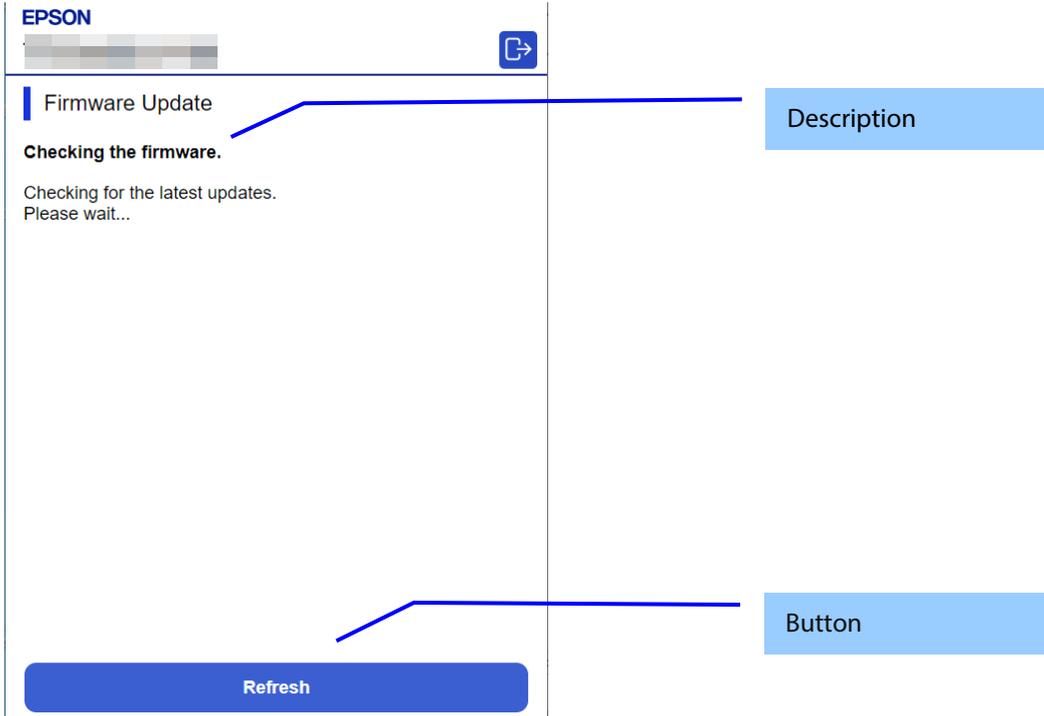


Figure 9-7 Firmware Search Process Page

9.7.2.2 Description Items

Table 9-22 Description

Items	Description
"Checking the firmware." "Checking for the latest updates.¥n Please wait..."	Fixed Strings

9.7.2.3 Button

Table 9-23 Button

Items	Description
"Refresh"	Button on the bottom of the main frame for refreshing the page. Click it to refresh the page.

9.7.3 Before Update Confirm Page

This page is shown if new firmware is found.
The following figure shows a layout of the confirmation page before updating.

9.7.3.1 Image

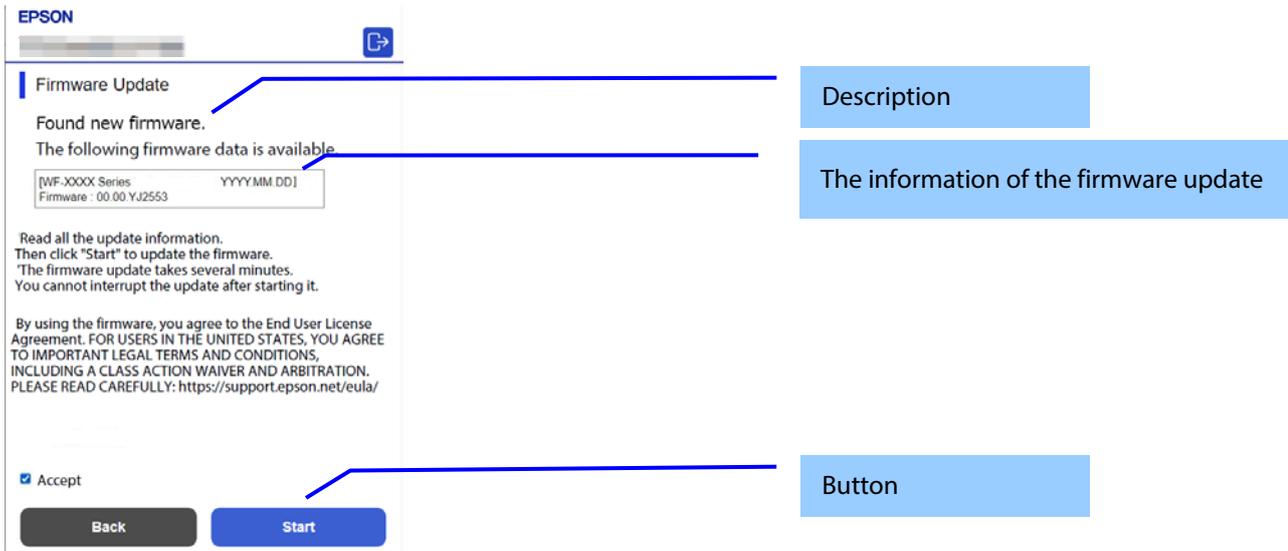


Figure 9-8 Before Update Confirm Page

9.7.3.2 Description

Table 9-24 Description

Items	Description
"Found new firmware." "The following firmware data is available."	Fixed Strings
"Read all the update information.¶ Then click "Start" to update the firmware." "The firmware update takes several minutes.¶ You cannot interrupt the update after starting it."	Fixed Strings
"By using the firmware, you agree to the End User License Agreement. FOR USERS IN THE UNITED STATES, YOU AGREE TO IMPORTANT LEGAL TERMS AND CONDITIONS, INCLUDING A CLASS ACTION WAIVER AND ARBITRATION. PLEASE READ CAREFULLY: https://support.epson.net/eula/"	EULA
"Accept"	Check box. Check this item to enable the "Start" button.

9.7.3.3 The Information of the Firmware Update

Table 9-25 The Information of the Firmware Update

Items	Description
Product name and release date.	YYYY.MM.DD
Firmware	Up to 10 characters in ASCII codes Up to 12 characters in ASCII codes XX.YY.ZZZZZZ -XX: Linux Kernel version -YY: Linux Appli version -ZZZZZ: Main version
Description	Up to 1024 bytes in UTF-8

9.7.3.4 Buttons

Table 9-26 Buttons

Items	Description
"Cancel"	Click to cancel the firmware update.
"Start"	Click to start the firmware update.

9.7.4 Cancel Process Page

9.7.4.1 Image

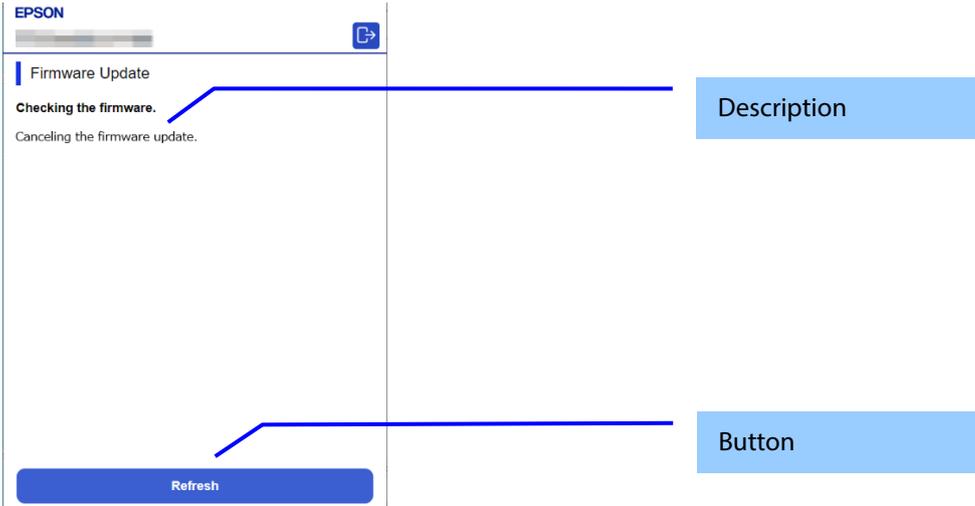


Figure 9-9 Cancel Process Page

9.7.4.2 Description

Table 9-27 Description

Items	Description
"Canceling the firmware update."	Fixed Strings

9.7.4.3 Button

Table 9-28 Button

Items	Description
"Refresh"	Button on bottom of the main frame. Click to refresh the page.

9.7.5 Result Page

9.7.5.1 Image

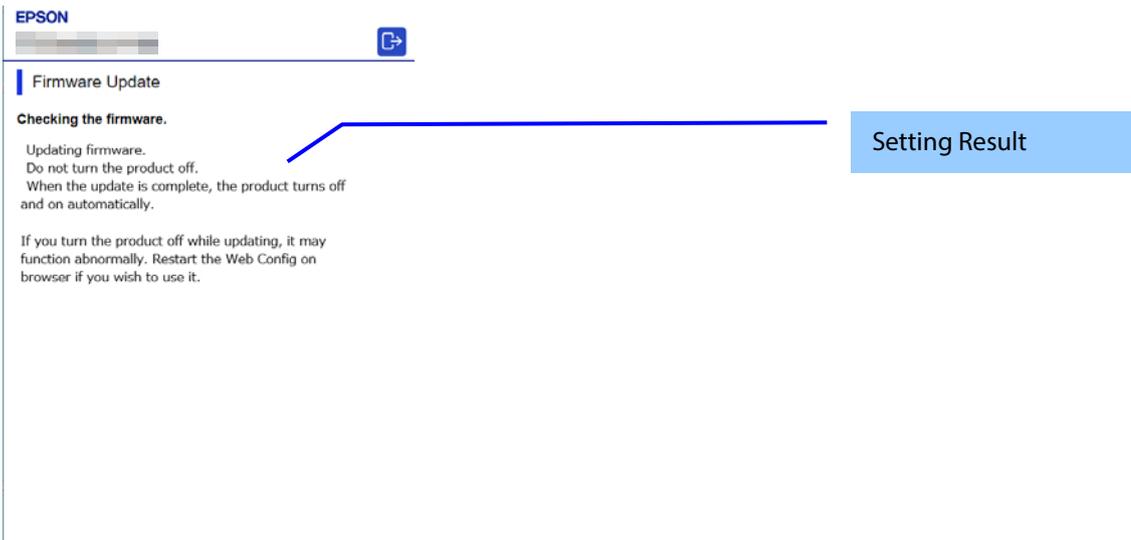


Figure 9-10 Result Page

9.7.5.2 Setting Result

Table 9-29 Setting Result

Items	Description
"Updating firmware." "Do not turn the product off." "When the update is complete, the product turns off and on automatically.¥n If you turn the product off while updating, it may function abnormally. Restart the Web Config on browser if you wish to use it."	This message is shown when the firmware update is started successfully. The ! icon is shown in front of "Do not turn the product off. ".
"The firmware update was canceled."	This message is shown when the firmware update is canceled successfully.
"You have the latest firmware."	This message is shown when the current version of the firmware is the most recent.
"Cannot connect to the Epson server."	This message is shown when the printer could not access the server. The X icon is shown in front of the string.
"Cannot update the firmware." "Quit printing or scanning." "Remove the roll paper if loaded." "When an error message appears on the screen or status lights indicate an error, solve the problem." "Note: There might be an error regarding the consumables such as ink supply units." "Remove the memory card." "If the problem is not solved, close the Web browser and then launch it."	This message is shown when the printer cannot update the firmware. The X icon is shown in front of "Cannot update the firmware. " "Remove the roll paper if loaded. " is shown on destinations with roll paper feed.
"The operation failed." "Another computer may be communicating with the product."	This message is shown when another computer may be communicating with the product. The X icon is shown in front of "The operation failed. ".
"Cannot update the firmware." "Low battery. Connect to a power source."	This message is shown when processing cannot be executed because the power is not connected and the battery level is low. The X icon is shown in front of "Cannot update the firmware. "

9.7.5.3 Button

Table 9-30 Button

Items	Description
"Back to Main"	Changes to the main page.

9.8 Advanced Setting Link

Press this button to display "Product Status" of the "Status" tab.

9.9 Cloud Services

9.9.1 Top page

9.9.1.1 Cloud Services Disabled State

9.9.1.1.1 Image

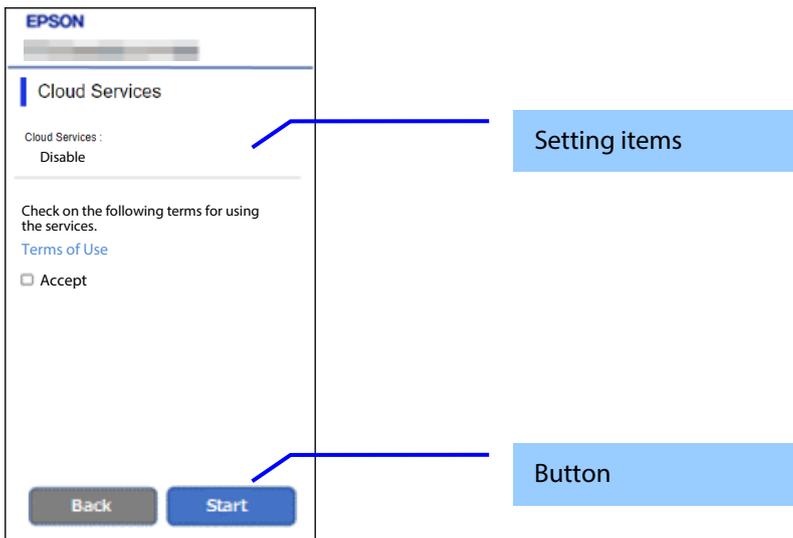


Figure 9-11 Cloud Services Disabled State

9.9.1.1.2 Setting items

Table 9-31 Setting items

Items	Description	Condition
"Cloud Services"	Displays whether it is possible to connect to Cloud Services. "Enable" / "Disable"	-
"Check on the following terms for using the services."	Fixed Strings	-
"Terms of Use"	If you click "Terms of Use", the Web Config accesses the following link in another window. https://pos-cloud-link.epson.com/documents/license.html	-
"Accept"	Check box. When this item is checked, the "OK" button is enabled.	-

9.9.1.1.3 Button

Table 9-32 Button

Items	Description	Condition
"Start"	Starts processing to enable Cloud Services connection.	-
"Back"	Use this button to move to main page.	-

9.9.1.2 Cloud Services Enable State

9.9.1.2.1 Image

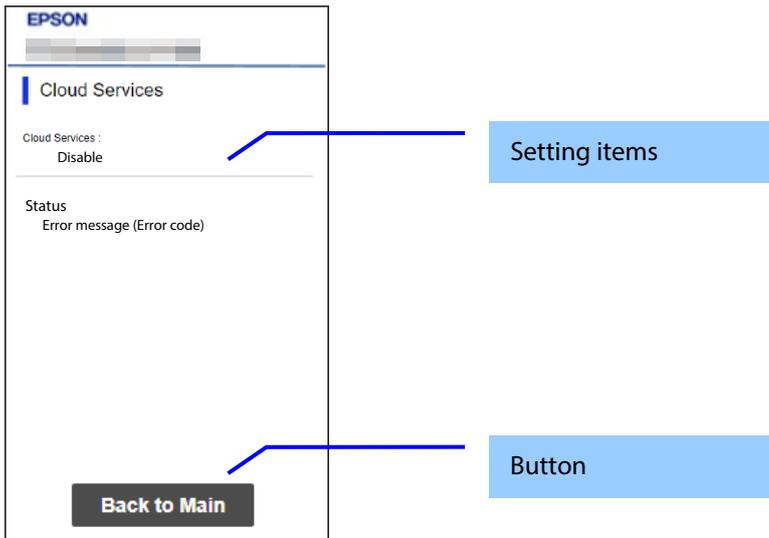


Figure 9-12 Cloud Services Enable State

9.9.1.2.2 Setting items

Table 9-33 Setting items

Items	Description	Condition
"Cloud Services"	Displays whether it is possible to connect to Cloud Services. "Enable" / "Disable"	-
"Status"	Display the connection status of one of the following cloud services. "Connection test was successful." "Services are currently unavailable. Try again later. (910001)" "Internet or services are unavailable.¥nCheck the LAN cable connection or the network settings and try again later. (910002)" "DNS services are unavailable.¥nCheck the DNS Server settings and try again later. (910003)" "Domain name cannot be resolved by DNS. Check the internet connection or network settings. (910004)" "The Proxy Server is unavailable. Check the Proxy Server settings and try again later. (910005)" "The Proxy Server settings might be wrong. Check the HTTPS port settings or Proxy Server settings. (910006)"	Error details are displayed when Cloud service connection is enabled, but error details are displayed when not connected is not possible.

9.9.1.2.3 Button

Table 9-34 Button

Items	Description	Condition
"Back to Main"	Main Page is displayed.	-

9.9.1.3 Cloud Services Changing State

9.9.1.3.1 Image

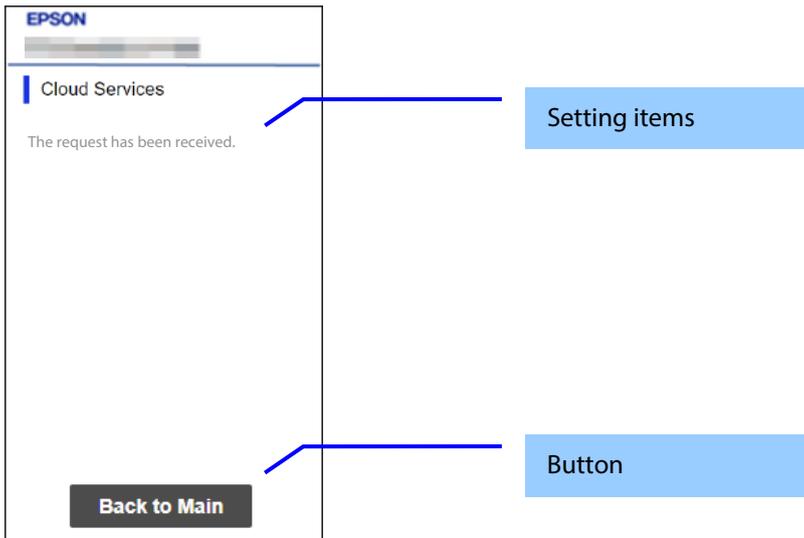


Figure 9-13 Cloud Services Changing State

9.9.1.3.2 Setting items

Table 9-35 Setting items

Items	Description	Condition
"The request has been received."	Displayed when accessing the TOP page after being redirected to the PIN code input page on the Cloud Services connection page before the connection is enabled. At this time, the PIN code input screen is also displayed on another tab.	-

9.9.1.3.3 Button

Table 9-36 Button

Items	Description	Condition
"Back to Main"	Main Page is displayed.	-

9.9.2 Result page

9.9.2.1 Image

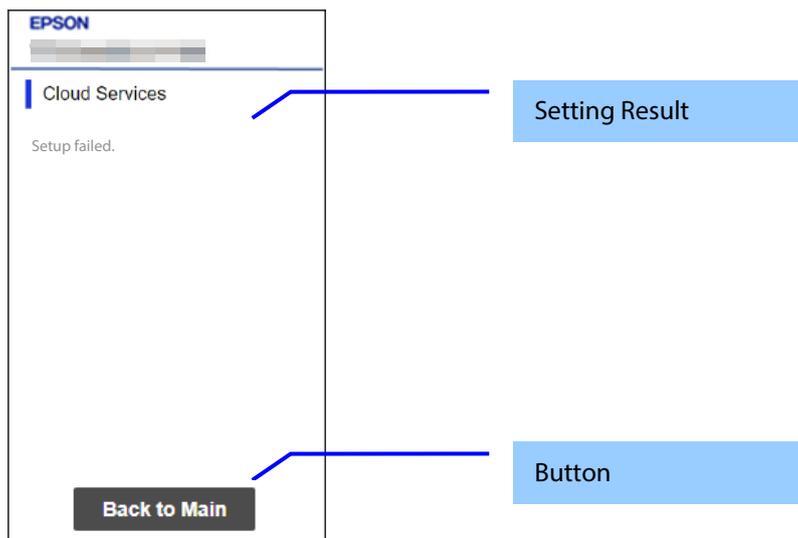


Figure 9-14 Result Page

9.9.2.2 Setting Result

Table 9-37 Setting Result

Items	Description	Condition
"The request has been received."	Displayed when the setting is successful and the Cloud Services PIN code input screen is displayed in a separate tab.	-
"Setup failed."	This text is shown if setup failed.	-
"Cannot execute because the product is in use."	This message is shown when the setting is unavailable because the product is in use.	Display additional error details when setting fails.
"There is a problem with the network device or it is difficult to access to the server."	Displayed when setting fails due to a network error.	Display additional error details when setting fails.
"This printer is not registered with cloud services."	Displayed when the product is not registered in Cloud Services.	Display additional error details when setting fails.

9.9.2.3 Button

Table 9-38 Button

Items	Description	Condition
"Back to Main"	Main Page is displayed.	-

10. Advanced Settings Page

10.1 Status

10.1.1 Product Status

10.1.1.1 Top Page

10.1.1.1.1 Image

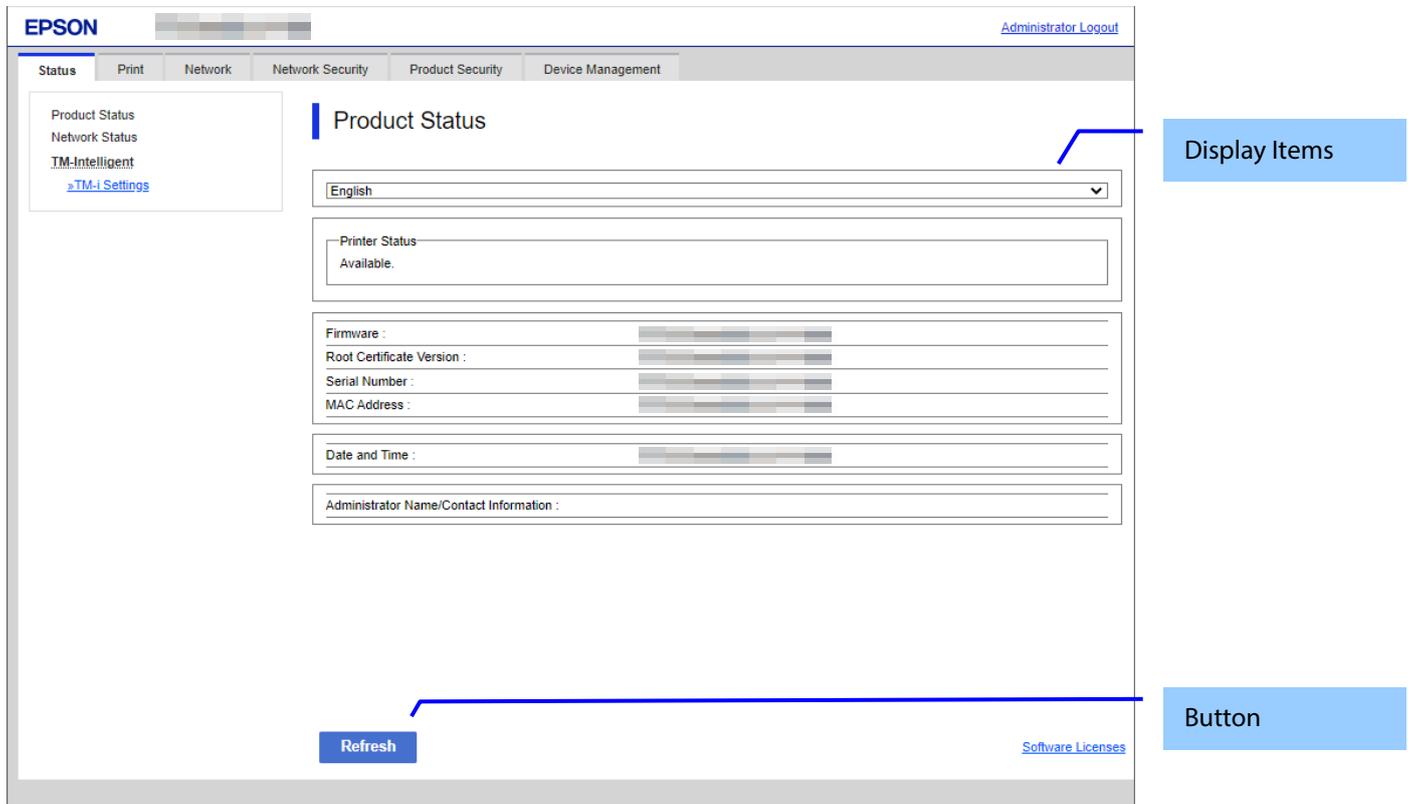


Figure 10-1 Product Status

10.1.1.1.2 Display items

10.1.1.1.2.1 Display Language Setting

The language specification is in accordance with Section 4 Language. When a language is selected, it is applied immediately and the page changes based on the selected language.

10.1.1.1.2.2 Status Information

One of the following messages is displayed in the printer status area, if the device has print function. If anything other than “Available” or “Busy” is displayed, a link to a Panel Snapshot is shown under the message.

Table 10-1 Printer Status

Items	Description
"Available."	This message is shown when the printer is ready to use.
"Busy."	This message is shown when the printer is not in any error condition but it is unable to use.
"Paper out."	This message is shown when the printer is out of paper.
"Paper jam."	This message is shown when the printer has a paper jam.
"An error has occurred. Please confirm the indicator or message on the product."	This message is shown when the printer cannot be used because of an error that is not due to mechanical failure.
"Printer error. Turn the power off and on again. For details, see your documentation."	This message is shown when some other fatal printer error occurs. If an error code is assigned, the error code is shown right behind the message.

In the scanner status area, either of the following messages is shown, if the product doesn't have print function.
 "Available." "Busy." When outside is indicated, a link to a Panel Snapshot is indicated under the message.

Table 10-2 Scanner Status

Items	Description	Condition
"Available."	This message is shown when the scanner is ready to use.	-
"Busy."	This message is shown when the scanner is busy.	-
"Paper jam. Remove the jammed paper in the Automatic Document Feeder (ADF)"	This message is shown when the scanner is in paper-jam condition.	-
"Incorrect size documents have been placed in the Automatic Document Feeder (ADF). Remove the documents."	This message is shown when the scanner is in ADF paper size error condition.	-
"Double feed has occurred."	This message is shown when the scanner is in double feed error condition.	-
"The number of scans is close to the Life Cycle of the rollers."	This message is shown when consumable roller should be replaced.	-Only consumable roller support printers.
"The number of scans exceeds the Life Cycle of the rollers."	This message is shown when consumable roller must be replaced.	-Only consumable roller support printers.
"Unavailable. Check [Hardware Status]."	This message is shown when the scanner has some error due to the mechanical failure and is unable to use.	-
"An error has occurred. Please confirm the indicator or message on the product."	This message is shown when the status is other than those above.(This error does not occur in the product.)	-

One of the following messages is shown in the hardware status area.

Table 10-3 Hardware Status

Items	Description
"Scanner is out of order. Contact Epson Support." "Panel Snapshot"	This message is shown when only Scanner is out of order. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"Wi-Fi is out of order. Contact Epson Support." "Panel Snapshot"	This message is shown when only Wi-Fi is out of order. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is displayed.
"Memory card slot is out of order. Contact Epson Support." "Panel Snapshot"	This message is shown when only memory card slot is out of order. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"Built-in SD card is out of order. Contact Epson Support." "Panel Snapshot"	This message is shown when only Built-in SD card is out of order. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"TPM is out of order. Contact Epson Support." "If you have not backed up the device data encryption key, back up the key." "To continue using the printer without exchanging the TPM, disable device data encryption." "Panel Snapshot"	This message is shown when only TPM is out of order and encryption function is enabled. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"TPM is out of order. Contact Epson Support." "Device data encryption can not be enabled." "Panel Snapshot"	This message is shown when only TPM is out of order and encryption function is disabled. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"PS board is out of order. Contact Epson Support." "Panel Snapshot"	This message is shown when the device has PS board as standard and PS board is out of order. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"There is a problem with PS board. Reset PS board after shut down and pull out the outlet. If the device can not be recovered, contact Epson Support." "Panel Snapshot"	This message is shown when the device has PS board optionally and PS board is out of order. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"Cassette1 is out of order. Contact Epson Support." "Panel Snapshot"	For printers other than model LP, this message is shown when only Cassette1 is out of order. The string is shown in red. A link to a Panel Snapshot Page is indicated.

"Cassette2 is out of order. Contact Epson Support. " "Panel Snapshot"	For printers other than model LP, this message is shown when only Cassette2 is out of order. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"Cassette3 is out of order. Please contact Epson Support. " "Panel Snapshot"	For printers other than model LP, this message is shown when only Cassette3 is out of order. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"Cassette4 is out of order. Contact Epson Support. " "Panel Snapshot"	For printers other than model LP, this message is shown when only Cassette4 is out of order. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"NFC is out of order. Contact Epson Support. " "Panel Snapshot"	This message is shown when only NFC module is out of order. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"Additional Network is out of order. Please contact Epson Support. " "Panel Snapshot"	This message is shown when only Additional Network module is out of order. An error code is shown right behind the message. The string is shown in red. A link to a Panel Snapshot Page is indicated.
"Additional Network : Update the firmware because this feature does not work in the current version." "Panel Snapshot"	This message is shown when only Additional Network can not be used due to version mismatch. A link to a Panel Snapshot Page is indicated.
"There are problems with x parts of the hardware. Contact Epson Support. (Detail)" "Panel Snapshot"	This message is shown when there is an abnormality in more than one type of hardware. 'x' indicates the number of failures. The string is shown in red. This message provides a link to open the Hardware Status page in a separate tab. A link to a Panel Snapshot Page is displayed.
"There are problems with x parts of the hardware. (Detail)" "Panel Snapshot"	This message is shown when there is an abnormality in more than one type of hardware. 'x' indicates the number of failures. The string is shown in red. This message provides a link to open the Hardware Status page in a separate tab. A link to a Panel Snapshot Page is displayed.

JavaScript information and IP address conflict information are shown in the Other Status area.

When JavaScript is disabled in the web browser, both JavaScript information and IP address conflict information are shown if the device detects that the IP address (IPv4) assigned to the device is used by another device.

Table 10-4 Other Status

Items	Description
"Enable the browser's JavaScript setting."	This message is shown when JavaScript is disabled in the web browser.
"xxx.xxx.xxx.xxx is already in use on the network."	'xxx.xxx.xxx.xxx' indicates the IP address of the product. This message is shown if the device detects that the IP address (IPv4) assigned to the device is used by another device. If the same error screen is deleted from the panel display, this message will no longer be displayed.
"Invalid date and time."	This message is shown when Date and Time are not set.
"The setting which is required restart has been changed. Turn the power off and on."	This message is shown when a restart is required to apply the changes made to settings.
"Direct-XX-YYYYYY is already in use on the network."	Shown when the Wi-Fi is used. 'Direct-XX-YYYYYY' indicates the IP address of the product. This message is shown if the device detects that the SSID assigned to the device is used by another device. If the same error screen is deleted from the panel display, this message will no longer be displayed.

10.1.1.1.2.3 Cloud Service related Information

Table 10-5 Cloud Services Status

Items	Description	Condition
"Cloud Services"	Displays whether cloud service connection is enabled/disabled.	-
"Status"	Displays the connection status of cloud services. If there is no connection, the error details and error code are also displayed.	-

10.1.1.1.2.4 Device System Information

Table 10-6 Device System Information

Items	Description	Condition
"Firmware"	Shows the firmware version. Up to 12 characters in ASCII codes XX.YY.ZZZZZZ -XX: Linux Kernel version -YY: Linux Appli version -ZZZZZ: Main version	-
"Root Certificate Version"	Shows the root certification version.	-
"Serial Number"	Shows the serial number.	For models that support the initial value for the administrator password, this is displayed only when the administrator is logged in.
"Network MAC Address"	Shows the MAC address of the network interface currently used (either wired LAN or wireless LAN (infrastructure)).	This item is displayed on model that support wireless functions.
"Wi-Fi Direct MAC Address"	Shows the MAC addresses of the Wi-Fi Direct interface if Wi-Fi Direct is enabled (both P2P Device Address and P2P Interface Address).	This item is displayed on model that support wireless functions.
"MAC Address"	Shows the MAC address of the network interface currently used (either wired LAN, wireless LAN (infrastructure), or Wi-Fi Direct).	This item is displayed on model that do not support wireless functions.

10.1.1.1.2.5 Date/Time Information

Table 10-7 Date/Time Information

Items	Description	Condition
"Date and Time"	Shows the date and time when the page is opened. If "Date and Time" is not set, "Invalid date and time." is shown.	Displayed only for printers that support date and time settings.

10.1.1.1.2.6 Administrator Information

Table 10-8 Administrator Information

Items	Description
"Administrator Name/Contact Information"	Shows contact information (name, phone number, etc.) that the user of the printer can use.

10.1.1.1.2.7 Software Licenses

Web Config shows this page when the "Software Licenses" link is clicked. License information for OSS that the printer is using is displayed on this page.

10.1.1.1.3 Button

Table 10-9 Button

Items	Description
"Refresh"	If pressed, updated information is shown on the top page.

10.1.2 Network Status

In the Confirm Network Settings, you can confirm the product's network settings.

10.1.2.1 Top Page

10.1.2.1.1 Image

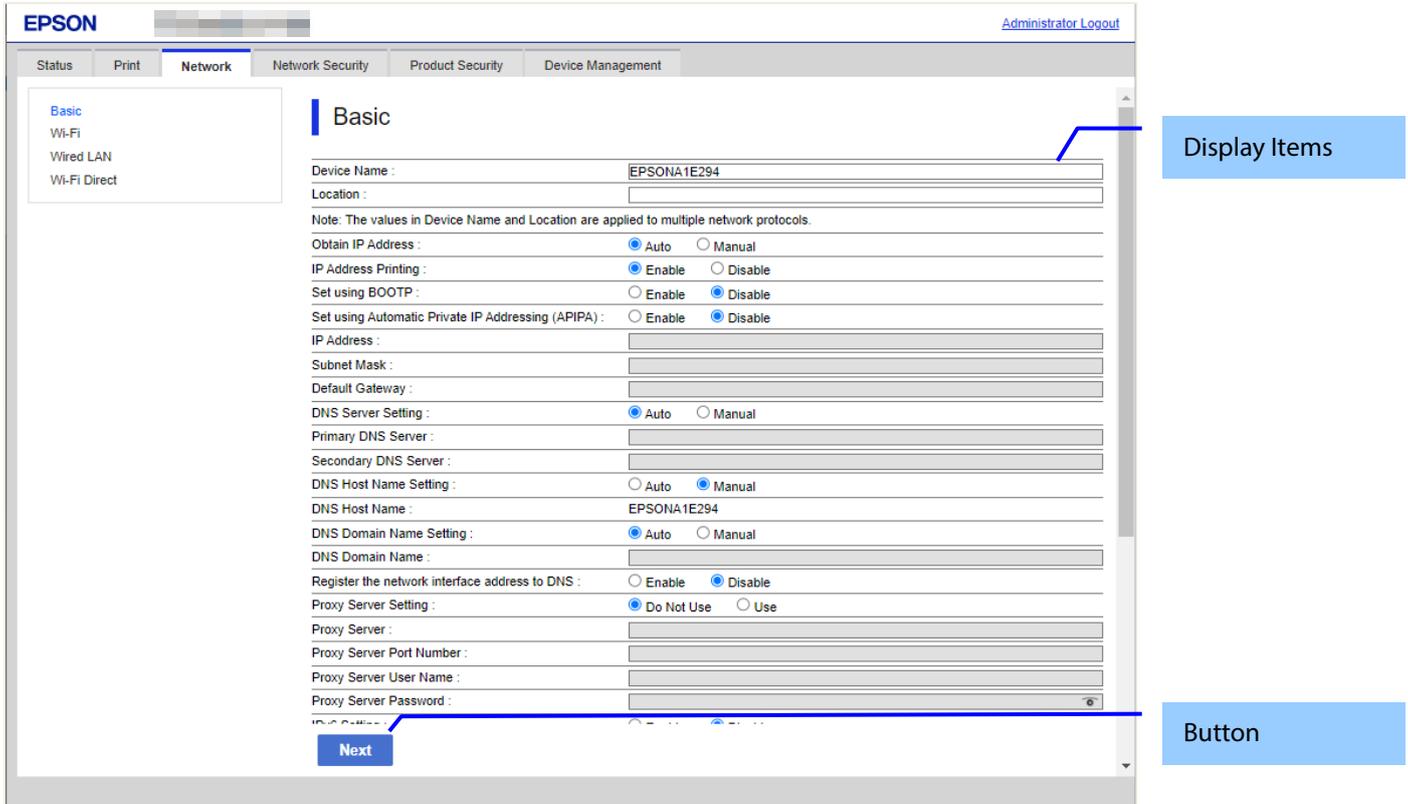


Figure 10-2 Network Status

10.1.2.1.2 Tab

"Network" and "Wi-Fi Direct" tabs are displayed on model that support wireless functions. You can switch between both sets of displayed information.

10.1.2.1.3 Display items

The following table shows the display items for both model that support wireless functions and model that do not support wireless functions.

Table 10-10 Displaying items (Network)

Items	Description	Condition
"Device Name"	Shows the name of the printer.	-
"Connection Status"	"Disconnect" / "10BASE-T Half Duplex" / "10BASE-T Full Duplex" / "100BASE-TX Half Duplex" / "100BASE-TX Full Duplex" / "1000BASE-T Full Duplex" / "Unknown"	Shown when the wired LAN is used.
	"Wi-Fi Disconnected" / "Searching for Wi-Fi" / "Wi-Fi-xxxMbps" ("xx": "00" - "495") / "Unknown"	Shown when the Wi-Fi is used.
	"Disable"	Shown when both the wired LAN and the wireless LAN are disabled (only Wi-Fi Direct Mode is used).
"Signal Strength"	"Excellent" / "Good" / "Fair" / "No Good" / "Unknown"	Only shown when wireless LAN is used. Not shown while Wi-Fi Direct is used.
"Obtain IP Address"	"Auto" / "Manual"	Not shown when Connection Status is disabled.
"Set using BOOTP"	"Enable" / "Disable"	If "Obtain IP Address" is "Manual", this item is not shown.
"Set using Automatic"	"Enable" / "Disable"	If "Obtain IP Address" is "Manual", this

"Private IP Addressing"		item is not shown.
"IP Address"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	Not shown when Connection Status is disabled.
"Subnet Mask"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	Not shown when Connection Status is disabled.
"Default Gateway"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	Not shown when Connection Status is disabled.
"DNS Server Setting"	"Auto" / "Manual"	Not shown when Connection Status is disabled.
"Primary DNS Server"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimals	Not shown when Connection Status is disabled.
"Secondary DNS Server"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	Not shown when Connection Status is disabled.
"DNS Host Name Setting"	"Auto" / "Manual"	Not shown when Connection Status is disabled.
"DNS Host Name Status"	"Unknown" / "Successful" / "Failed"	Shown if the way of obtaining a DNS host name is auto. Not shown when Connection Status is disabled.
"DNS Host Name"	Shows the DNS host name currently used.	Not shown when Connection Status is disabled.
"DNS Domain Name Setting"	"Auto" / "Manual"	Not shown when Connection Status is disabled.
"DNS Domain Name Status"	"Unknown" / "Successful" / "Failed"	Shown if the way of obtaining a DNS host name is auto. Not shown when Connection Status is disabled.
"DNS Domain Name"	Shows the DNS domain name currently used.	Not shown when Connection Status is disabled.
"Register the network interface address to DNS"	"Enable" / "Disable"	Not shown when Connection Status is disabled.
"Proxy Server Setting"	"Do Not Use" / "Use"	Not shown when Connection Status is disabled.
"Proxy Server"	Shows the proxy server address in the IP address or FQDN format. - IP address format "xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal - FQDN format ASCII (alphanumeric, dot, hyphen), 1-255 characters	Shown when the value for "Proxy Server Setting" is "Use". Not shown when Connection Status is disabled.
"Proxy Server Port Number"	Range of 0 - 65535 in decimals.	Shown when value of "Proxy Server Setting" is "Use". Not shown when Connection Status is disabled.
"Proxy Server User Name"	0 - 255 byte characters (range of 0x20 - 0x7E in ASCII codes)	Shown when value of "Proxy Server Setting" is "Use". Not shown when Connection Status is disabled.
"Proxy Server Password"	"Not Set" / "*****"	Shown when value of "Proxy Server Setting" is "Use". Not shown when Connection Status is disabled.
"IPv6 Setting"	"Enable" / "Disable"	Not shown when Connection Status is disabled.
"IPv6 Privacy Extension"	"Enable" / "Disable"	Shown if IPv6 is enabled. Not shown when Connection Status is disabled.
"IPv6 DHCP Server Setting"	"Do Not Use" / "Use"	Shown if IPv6 is enabled.

		Not shown when Connection Status is disable.
"IPv6 Address"	Shows an IPv6 address default gateway.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"IPv6 Address Default Gateway"	Shows a valid IPv6 link-local address.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"IPv6 Link-Local Address"	Shows a valid stateful IPv6 address.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"IPv6 Stateful Address "	Shows a valid stateless IPv6 address.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"IPv6 Stateless Address 1"	Shows a valid stateless IPv6 address.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"IPv6 Stateless Address 2"	Shows a valid stateless IPv6 address.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"IPv6 Stateless Address 3"	Shows an IPv6 address.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"IPv6 Primary DNS Server"	Shows an IPv6 address.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"IPv6 Secondary DNS Server"	Shows an IPv6 address default gateway.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"Wi-Fi Setup"	"AOSS" / "WPS" / "Manual" / "Wi-Fi Auto Connect"	Shown if wireless LAN is used. Not shown when Connection Status is disable.
"Wi-Fi Mode"	"IEEE802.11b" / "IEEE802.11g" / "IEEE802.11b/g" / "IEEE802.11b/g/n" / "IEEE802.11a/n/ac"	Shown if the wireless LAN is used. Not shown when Connection Status is disable.
"SSID"	1 – 32 characters Alphanumeric and sign characters	Shown if the wireless LAN is used. Not shown when Connection Status is disable.
"Channel"	- Not equipped with Wi-Fi chip Range of "1" - "13" - Equipped with Wi-Fi chip 2.4GHz Range of "1" - "13" 5GHz "36"/"40"/"44"/"48"/"52"/"56"/"60"/"64"/"100"/"104"/"108"/"112"/"116"/"120"/"124"/"128"/"132"/"136"/"140"/"149"/"153"/"157"/"161"/"165"	Shown if the wireless LAN is used. Not shown when Connection Status is disable.
"Security Level"	"None" / "WPA-PSK(TKIP)" / "WPA2-PSK(AES)" / "WPA2/WPA3-Enterprise" / "WPA3-SAE(AES)"	Shown if the wireless LAN is used. Not shown when Connection Status is disable.
"Password"	"Not Set" / "*****"	Shown if wireless LAN is used and Security Level is not WPA2/WPA3-Enterprise. Not shown when Connection Status is disable.
"MAC Address"	"XX:XX:XX:XX:XX:XX" X: 0 - F in hexadecimal	Not shown when Connection Status is disable.
"IEEE802.11k/v"	"Enable" / "Disable"	For wireless LAN option dongle models, display when the dongle is inserted in the main unit, and hide when not inserted. Display on models that support the IEEE802.11k/v/r function.
"IEEE802.11r"	"Enable" / "Disable"	For wireless LAN option dongle

		models, display when the dongle is inserted in the main unit, and hide when not inserted. Display on models that support the IEEE802.11k/v/r function.
"Roaming Setting"	Fixed strings for field name	Displayed on models that support the Roaming function and only when wireless LAN is used. Not shown when Connection Status is "Disabled".
"Roaming Setting"	"Enable" / "Disable"	Displayed on models that support the Roaming function and only when wireless LAN is used. Not shown when Connection Status is "Disabled".
"AP Density"	"Low" / "Medium" / "High"	Displayed on models that support the Roaming function and only when "Roaming Setting" is "Enabled".

Table 10-11 Display Items (Wi-Fi Direct)

Items	Description	Condition
"Device Name"	Shows the printer name currently used.	-
"Connection Method"	"Not Set"/"Simple AP"	-
"IP Address"	"Auto"/"Manual" and IP address are displayed. The IP address is in the following format: "xxx.xxx.xxx.xxx". xxx: 0 - 255 in decimals	Shown if "Connection Method" is not "Not Set"
"Subnet Mask"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	Shown if "Connection Method" is not "Not Set"
"Default Gateway"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	Shown if "Connection Method" is not "Not Set"
"The number of connected devices"	Range of "0" - "8"	Shown if "Connection Method" is not "Simple AP".
"SSID"	1 - 32 characters (alphanumeric characters and marks)	Shown if "Connection Method" is not "Not Set"
"Channel"	- If it is not equipped with Wi-Fi chip. Range of "1" - "13" - If it is equipped with Wi-Fi chip. 2.4GHz Range of "1" - "13" 5GHz "36"/"40"/"44"/"48"/"52"/"56"/"60"/"64"/"100"/"104"/"108"/"112"/"116"/"120"/"124"/"128"/"132"/"136"/"140"/"149"/"153"/"157"/"161"/"165"	Shown if "Connection Method" is not "Not Set"
"Security Level"	"WPA2-PSK(AES)" only	Shown if "Connection Method" is not "Not Set"
"Password"	"*****"	Shown if "Connection Method" is not "Not Set"
"MAC Address"	"XX:XX:XX:XX:XX:XX" X: Range of "0" - "F" in hexadecimal	Shown if "Connection Method" is not "Not Set"

Table 10-12 Display items (Not supporting wireless functions)

Items	Description	Condition
"Device Name"	Shows the printer name currently used.	-
"Connection Status"	"Disconnect" / "10BASE-T, Half Duplex" / "10BASE-T, Full Duplex" / "100BASE-TX, Half Duplex" / "100BASE-TX, Full Duplex" / "1000BASE-T, Full duplex" / "Unknown"	Shown when the wired LAN is used.
	"Wi-Fi Disconnected" / "Searching for Wi-Fi" / "W-Fi-xxxMbps" ("xxx": "00" - "495") / "Unknown"	Shown when the wi-fi is used.
"Signal Strength"	"Excellent" / "Good" / "Fair" / "No Good" / "Unknown"	Only shown when wireless LAN is used. Not shown while Wi-Fi Direct is used.
"Obtain IP Address"	"Auto" / "Manual"	-
"Set using BOOTP"	"Enable" / "Disable"	- If "Obtain IP Address" is "Manual", this item is not shown.
"Set using Automatic Private IP Addressing (APIPA)"	"Enable" / "Disable"	- If "Obtain IP Address" is "Manual", this item is not shown.
"IP Address"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	-
"Subnet Mask"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	-
"Default Gateway"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	-
"DNS Server Setting"	"Auto" / "Manual"	-
"Primary DNS Server"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	-
"Secondary DNS Server"	"xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal	-
"Way of obtaining DNS Host Name"	"Auto" / "Manual"	-
" DNS Host Name Status"	"Unknown" / "Successful" / "Failed"	Shown if the way of obtaining a DNS host name is auto.
"DNS Host Name"	Shows the DNS host name currently used.	-
"Way of obtaining DNS Domain Name"	"Auto" / "Manual"	-
"DNS Domain Name Status"	"Unknown" / "Successful" / "Failed"	Shown if the way of obtaining a DNS host name is auto.
"State of DNS Domain Name obtained automatically"	Shows the DNS domain name currently used.	-
"Proxy Server Setting"	"Do Not Use" / "Use"	-
"Proxy Server"	Shows the proxy server name in the IP address or FQDN format. - IP address format "xxx.xxx.xxx.xxx" xxx: 0 - 255 in decimal - FQDN format ASCII (alphanumeric, dot, hyphen), 1-255 characters	Shown when the value for "Proxy Server Setting" is "Use".
"Proxy Server Port Number"	Range of "0" - "65535" in decimal	Shown when the value for "Proxy Server Setting" is "Use".
"Proxy Server User Name"	0 - 256byte alphanumeric characters ASCII 0x20 - 0x7E	Shown when value of "Proxy Server Setting" is "Use".
"Proxy Server Password"	"Not Set" / "*****"	Shown when value of "Proxy Server Setting" is "Use".
"IPv6 Setting"	"Enable" / "Disable"	-
"IPv6 Anonymous Address"	"Enable" / "Disable"	Shown if the IPv6 Setting is used.
"IPv6 DHCP Server Setting"	"Do Not Use" / "Use"	Shown if IPv6 is enabled. Not shown if the DHCPv6 function is not supported.
"IPv6 Address"	Shows an IPv6 address.	Shown if the IPv6 Setting is used.
"IPv6 Address Default Gateway"	Shows an IPv6 address.	Shown if the IPv6 Setting is used.
"IPv6 Link-Local Address"	Shows a valid IPv6 link-local address	Shown if the IPv6 Setting is used.

"IPv6 Stateful Address "	Shows a valid stateful IPv6 address.	Shown if IPv6 is enabled. Not shown when Connection Status is disable.
"IPv6 Stateless Address 1"	Shows an IPv6 stateless address	Shown if the IPv6 Setting is used.
"IPv6 Stateless Address 2"	Shows an IPv6 stateless address	Shown if the IPv6 Setting is used.
"IPv6 Stateless Address 3"	Shows an IPv6 stateless address	Shown if the IPv6 Setting is used.
"IPv6 Primary DNS Server"	Shows an IPv6 address	Shown if the IPv6 Setting is used.
"IPv6 Secondary DNS Server"	Shows an IPv6 address	Shown if the IPv6 Setting is used.
"Wi-Fi Setup"	"AOSS" / "WPS" / "Wi-Fi Direct" / " Manual" / "Wi-Fi Auto Connect"	Shown if the wireless LAN is used.
"Wi-Fi Mode"	"IEEE802.11b" / "IEEE802.11g" / "IEEE802.11b/g" / "IEEE802.11b/g/n"	Shown if the wireless LAN is used.
"The number of connected devices"	Range of 0 to 4 in decimals	Shown if the Simple AP Mode is enabled.
"SSID"	1~32 characters Alphanumeric and sign characters	Shown if the wireless LAN is used.
"Channel"	Range of "1" - "13"	Shown if the wireless LAN is used.
"Security Level"	"None" / "WPA-PSK(TKIP)" / "WPA2-PSK(AES)" / "WPA2/WPA3-Enterprise" / "WPA3-SAE(AES)"	Shown if the wireless LAN is used.
"Password"	"Not Set" / "*****"	Shown if wireless LAN is used and Security Level is not WPA2-Enterprise.
"MAC Address"	"XX:XX:XX:XX:XX:XX" X: Range of "0" - "F" in hexadecimal	-

10.1.2.1.4 Button

Table 10-13 Button

Items	Description
"Refresh"	If pressed, updated information is shown on the top page.

10.1.3 TM-Intelligent

It is possible to establish a link to TM-i.

10.1.3.1 Top page

Click a menu item to open the TM-i Settings page in a new tab.
(See "TM-i Settings" for more information.)

10.1.3.1.1 Image

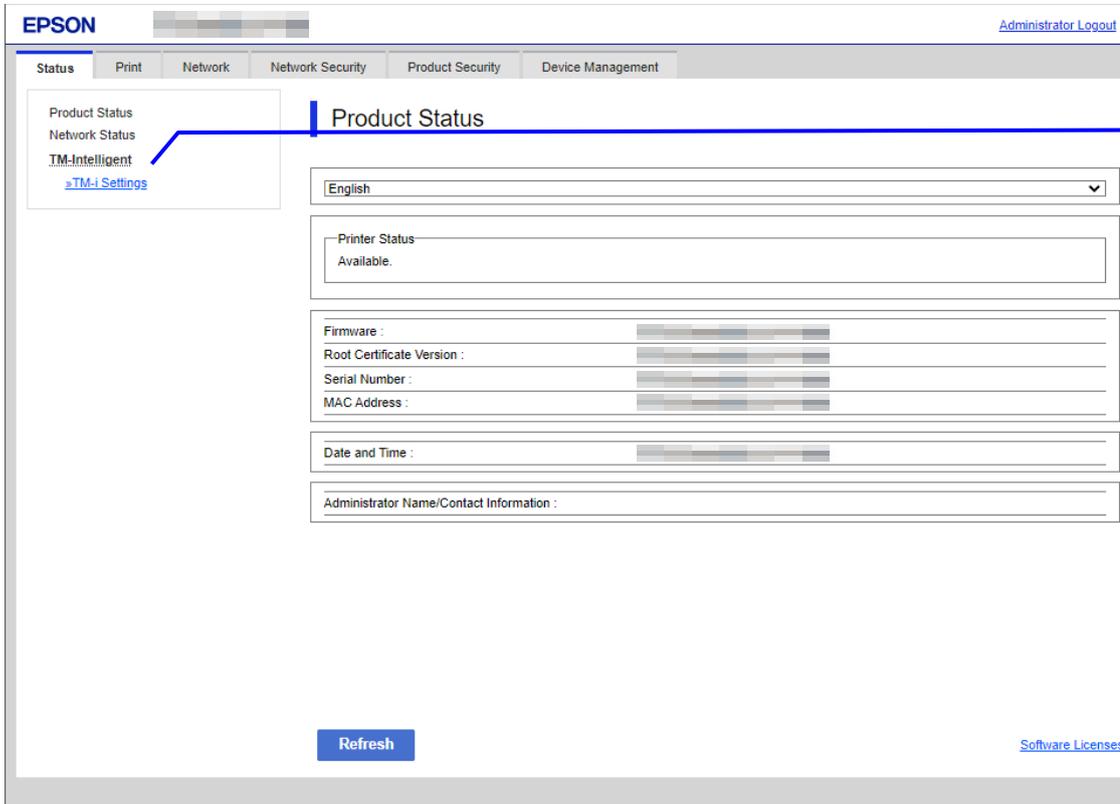


Figure 10-3 Link to TM-i Settings page

10.2 Print

10.2.1 Print Settings

10.2.1.1 Top Page

10.2.1.1.1 Image

The following figure shows the layout of the top page.

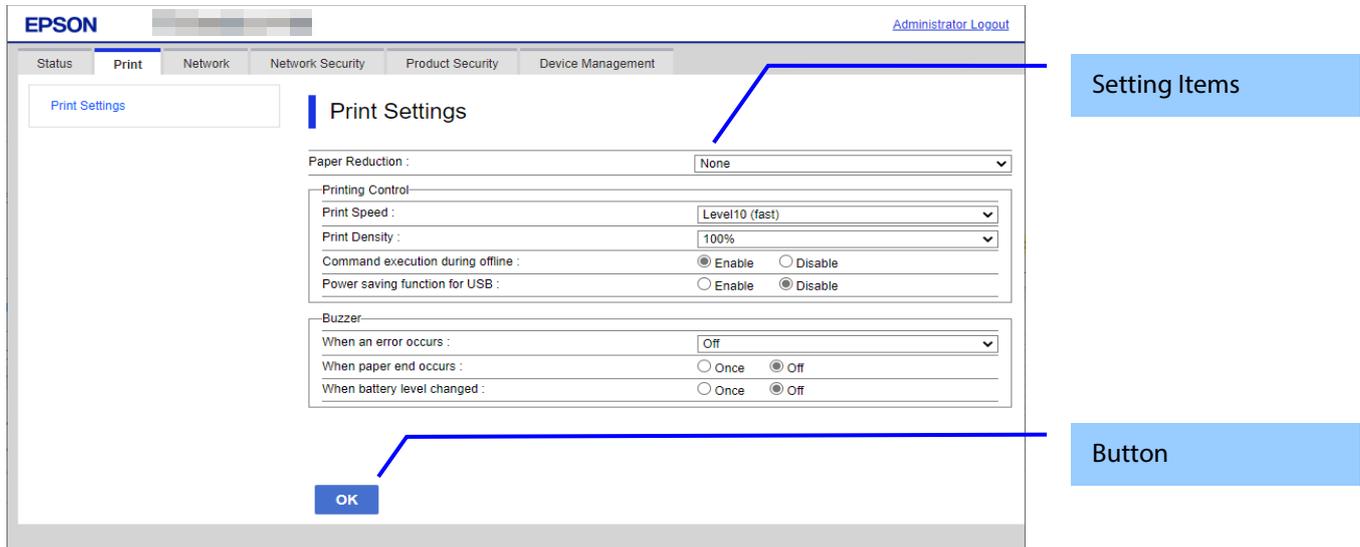


Figure 10-4 Image

10.2.1.1.2 Setting Items

Table 10-14 Setting Items

Items	Description	Condition
"Paper Reduction"	Use the drop-down list to select from the following options: "Max" / "Recommendation" / "None"	Display only on models that support paper reduction
"Printing Control"	Title	-
"Printing Speed"	For models that support the maximum printing speed "Level10" Use the drop-down list to select from the following options: "Level1 (slow)" / "Level2" / "Level3" / "Level4" / "Level5" / "Level6" / "Level7" / "Level8" / "Level9" / "Level10 (fast)" For models that support the maximum printing speed "Level13" Use the drop-down list to select from the following options: "Level1 (slow)" / "Level2" / "Level3" / "Level4" / "Level5" / "Level6" / "Level7" / "Level8" / "Level9" / "Level10" / "Level11" / "Level12" / "Level13 (fast)" For models that support the maximum printing speed "Level17" Use the drop-down list to select from the following options: "Level1 (slow)" / "Level2" / "Level3" / "Level4" / "Level5" / "Level6" / "Level7" / "Level8" / "Level9" / "Level10" / "Level11" / "Level12" / "Level13" / "Level14" / "Level15" / "Level16" / "Level17 (fast)"	Displayed only on models that support print speed
"Print Density"	A value can be chosen using the Drop-down list from the following options: "70%" / "75%" / "80%" / "85%" / "90%" /	Display only on models that support Print Density

	"95%" / "100%" / "105%" / "110%" / "115%" / "120%" / "125%" / "130%" * "125%" and "130%" are displayed only for models that support the maximum print density "130%".	
"Command execution during offline"	User can select "Enable" / "Disable" by radio button.	Display only on models that support Command execution during offline
"Power saving function for USB"	User can select "Enable" / "Disable" by radio button.	Display only on models that support Power saving function for USB
"Buzzer"	Title	-
"Buzzer"	User can select "Optional Buzzer" / "Disable" by radio button.	This item is displayed on devices with a buzzer.
"When an error occurs"	Use the drop-down list to select from the following options: "Off" / "Once" / "Continuous" * "Continuous" is displayed only for compatible models.	This item is displayed on devices with a buzzer.
"When auto paper cut is operating"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when automatic paper cut is performed.
"When paper end occurs"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when paper end occurs.
"When battery level changed"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when the battery level changes.
"When specified pulse 1 (2 pin) occurs"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when specified pulse 1 (2 pin) occurs.
"When specified pulse 2 (5 pin) occurs"	User can select "Off" / "Once" by radio button.	This item is displayed on devices with a buzzer when specified pulse 2 (5 pin) occurs.

10.2.1.1.3 Button

The following table shows the buttons on the page.

Table 10-15 Button

Items	Description
"OK"	Button to start print settings. Press the button to display the reboot confirmation pop-up
"Back"	Button to move to the main page.

If the Web Config recognizes an error in the input value after the "OK" button is pressed, the following reboot confirmation pop-up is shown.

Table 10-16 Reboot Confirmation Pop-up

Items	Description
"Product will be restarted to apply the settings."	Displayed when the "Set" button is pressed. Click the "OK" button in the pop-up to move the Result Page.

10.2.1.2 Result Page

The result message is shown on the main frame after the “OK” button is pressed.

10.2.1.2.1 Image

The following figure shows the layout of the results page.

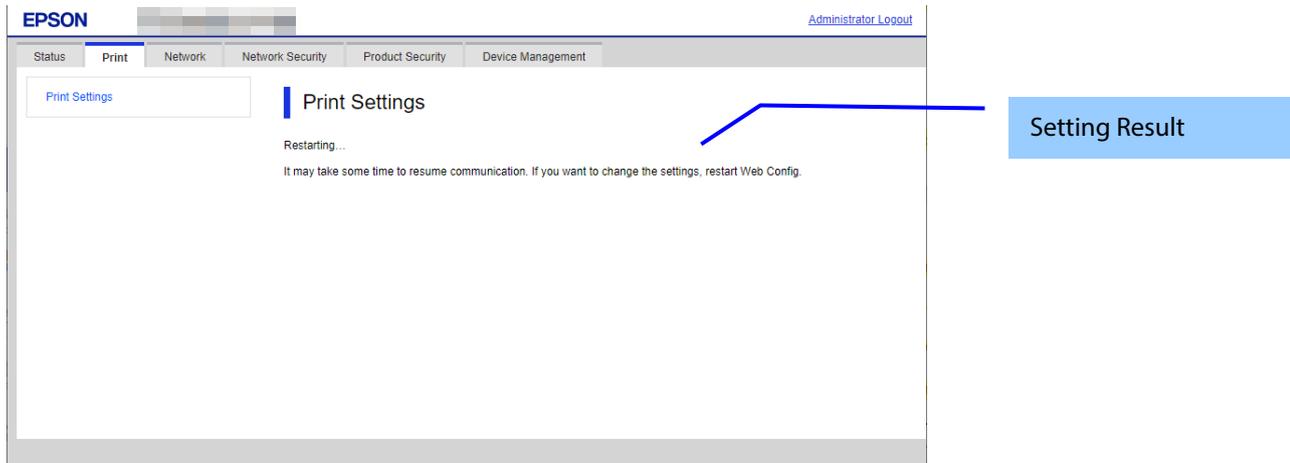


Figure 10-5 Image

10.2.1.2.2 Setting Result

Table 10-17 Setting Result

Items	Description
"Setup complete. Restarting communication may take a few minutes. If you want to change the settings, reconnect to the Web Config."	This message is shown when the settings are completed successfully.
"Setup failed."	This message is shown if setup fails.
"Cannot access the product until processing is complete."	This message is shown when the setting is unavailable because the product is processing.

10.2.2 Secure Printing

This will appear on printers that comply with the European Radio Equipment Directive (hereafter, RED).

10.2.2.1 Top Page

10.2.2.1.1 Image

The following figure shows a layout of top page.

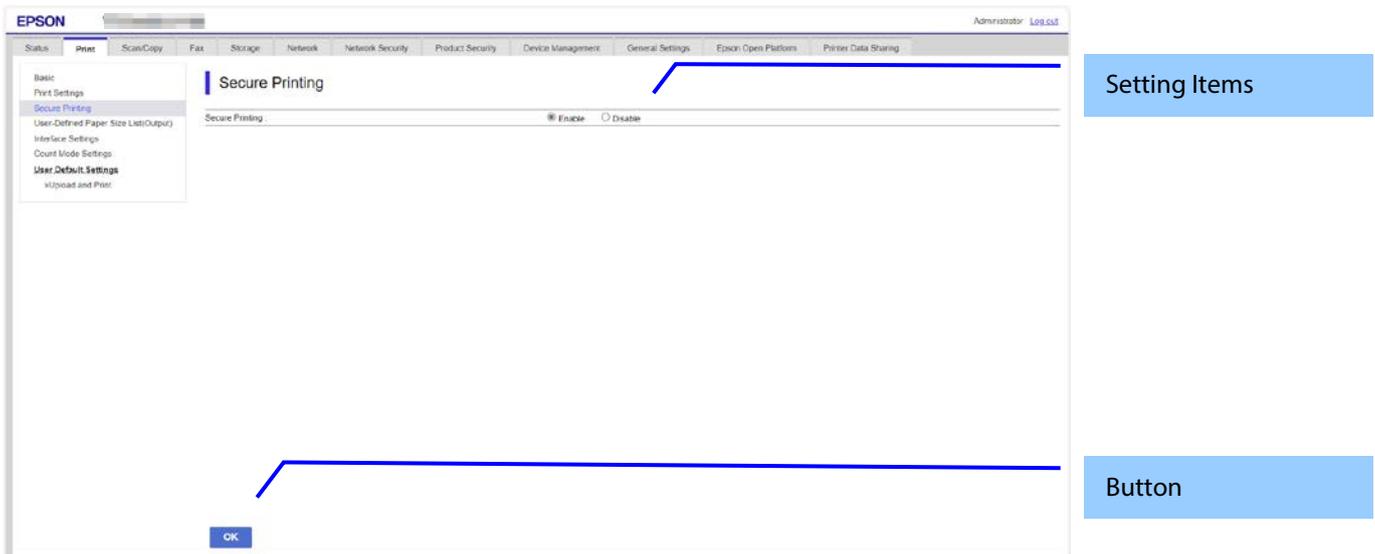


Figure 10-6 Image

10.2.2.1.2 Setting Items

Table 10-18 Setting Items

Items	Description	Condition
"Secure Printing"	Two radio buttons are provided to choose either of the followings: "Enable" / "Disable"	-

10.2.2.1.3 Button

The following table shows the button on the page.

Table 10-19 Button

Items	Description
"OK"	Button to start print settings.

When "OK" button is pressed, the following pop-up is shown.

Table 10-20 Pop-up

Items	Description
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	Displayed when the "Set" button is pressed. Click the "OK" button in the pop-up to move the Result Page.
"Product will be restarted to apply the settings."	Displayed when the "Set" button is pressed. Click the "OK" button in the pop-up to move the Result Page.

10.2.2.2 Result Page

The result message is shown on the main frame after "OK" button is pressed.

10.2.2.2.1 Image

The following figure shows a layout of result page.

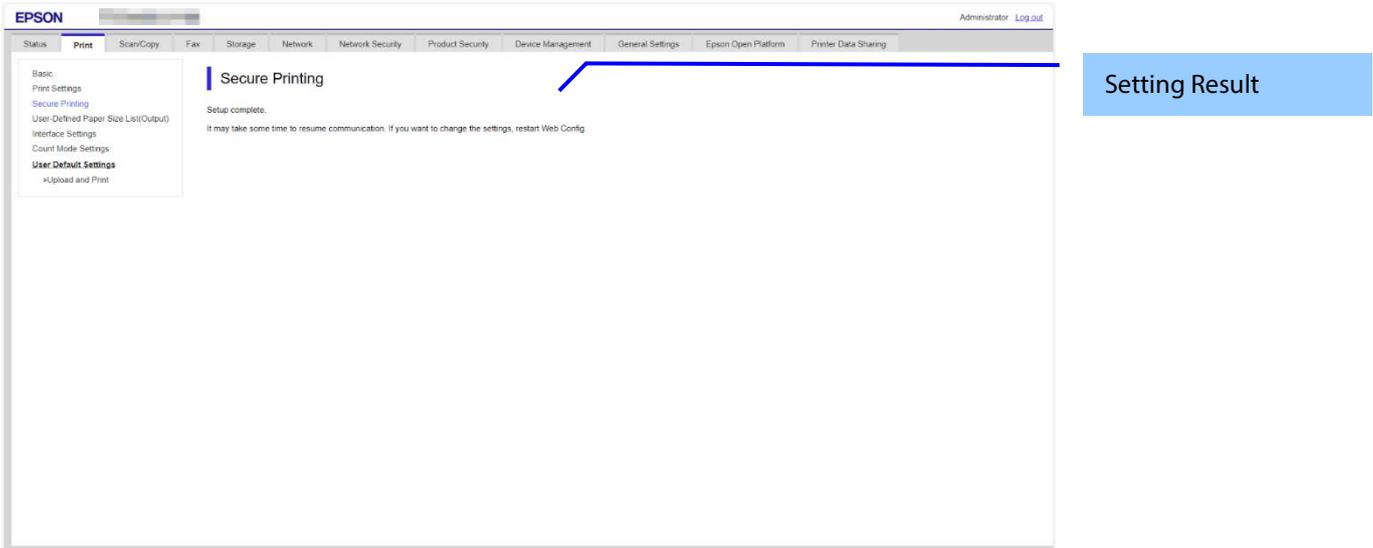


Figure 10-7 Image

10.2.2.2.2 Setting Result

Table 10-21 Setting Result

Items	Description
"Setup complete. Restarting communication may take a few minutes. If you want to change the settings, reconnect to the Web Config."	This message is shown when the settings are completed successfully.
"Setup failed."	This message is shown if setup is failed.
"Cannot access the product until processing is complete."	This message is shown when the setting is unavailable as the product works.

10.3 Network

10.3.1 Network Basic

10.3.1.1 Top Page

10.3.1.1.1 Image

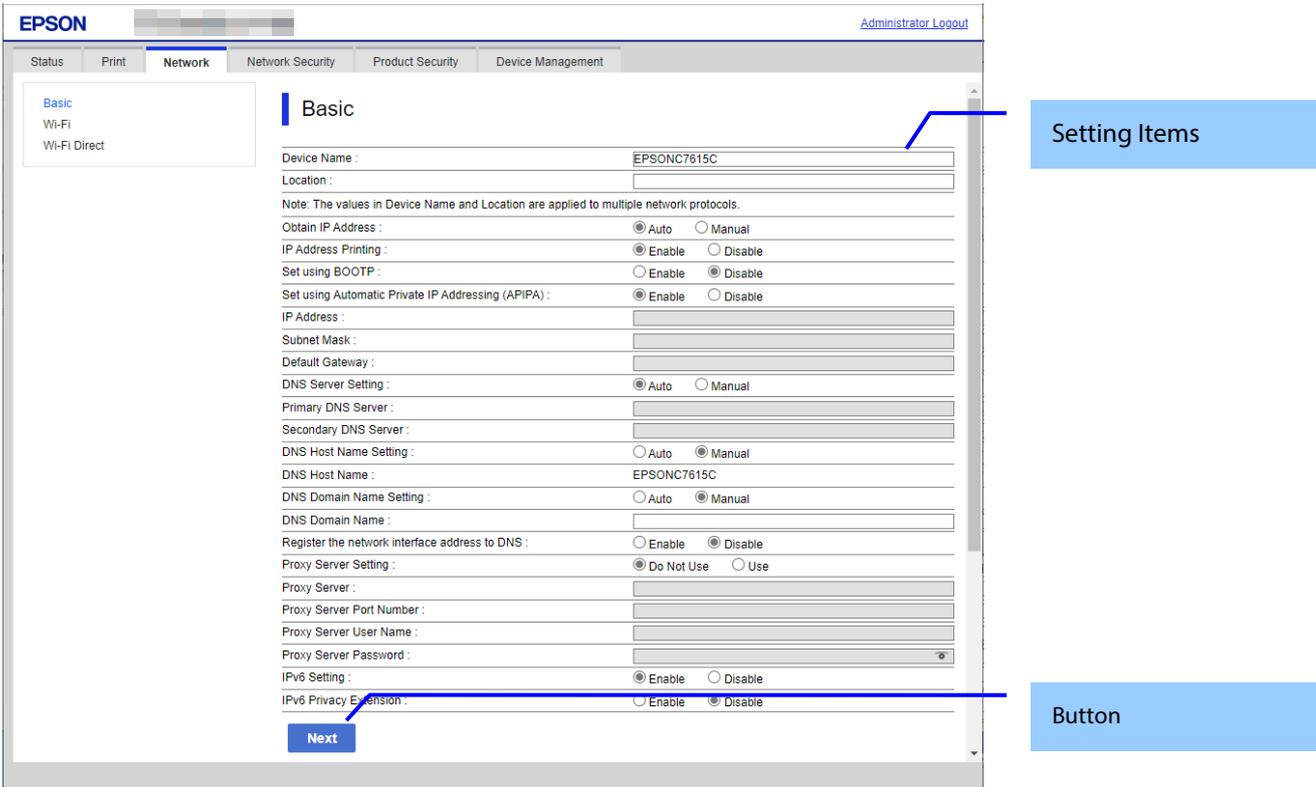


Figure 10-8 Top Page

10.3.1.1.2 Setting Items

The following table shows the network setting items in Wi-Fi/Network Setup.

Table 10-22 Setting Items

Items	Description	Condition
"Device Name"	A text box is provided. The string must have 2 to 15 characters and contain "A"~"Z", "a"~"z", "0"~"9", and "-". (Spaces are not allowed.) The leading character must be "A"~"Z" or "a"~"z". ("0"~"9" and "-" are not allowed.) The final character must be "A"~"Z", "a"~"z" or "0"~"9". ("- is not allowed.)	-
"Location"	A text box is provided. The string must be UTF-8 characters up to 127 bytes.	-
"Note: The values in Device Name and Location are applied to multiple network protocols."	Notes for "Printer Name" and "Location"	-
"Obtain IP Address"	Two radio buttons are provided to choose one of the following: "Auto" / "Manual"	-
"IP Address Printing"	Two radio buttons are provided to choose one of the following: "Enable" / "Disable"	This item is displayed only for models that support IP address printing.
"Set using BOOTP"	Two radio buttons are provided to choose one of the following: "Enable" / "Disable"	- If "Obtain IP Address" is "Manual", this item is grayed-out. This item is not displayed on CIJ.

"Set using Automatic Private IP Addressing (APIPA)"	Two radio buttons are provided to choose one of the following: "Enable" / "Disable"	- If "Obtain IP Address" is "Manual", this item is grayed-out. This item is not displayed on CIJ.
"IP Address"	A text box is provided. Format: "xxx.xxx.xxx.xxx" "xxx": "0"~"255" in decimals. The following addresses can not be set. "0.0.0.0"~"0.255.255.255" Loopback address("127.0.0.0"~"127.255.255.255") Class D address("224.0.0.0"~"239.255.255.255") Class E address("240.0.0.0"~"255.255.255.255") Directed broadcast address("255.255.255.255")	- If "Obtain IP Address" is "Auto", this item is grayed-out.
"Subnet Mask"	A text box is provided. Format: "xxx.xxx.xxx.xxx" "xxx": "0"~"255" in decimals. The following addresses can not be set. Discontinuous mask bit (Ex: "255.254.128.0") 0.0.0.0 255.255.255.254 255.255.255.255	- If "Obtain IP Address" is "Auto", this item is grayed-out.
"Default Gateway"	A text box is provided. Format: "xxx.xxx.xxx.xxx" "xxx": "0"~"255" in decimals. The following addresses can not be set. "0.0.0.0" (The display is blank if this value is set.) The following addresses can not be set. "0.0.0.1"~"0.255.255.255.255" Loopback address("127.0.0.0"~"127.255.255.255") Class D address("224.0.0.0"~"239.255.255.255") Class E address("240.0.0.0"~"255.255.255.255") Directed broadcast address("255.255.255.255")	- If "Obtain IP Address" is "Auto", this item is grayed-out.
"DNS Server Setting"	Two radio buttons are provided to choose one of the following: "Auto" / "Manual" "Manual" is selected when "Obtain IP Address" is "Manual".	-
"Primary DNS Server"	A text box is provided. Format: "xxx.xxx.xxx.xxx" "xxx": "0"~"255" in decimals. ("0.0.0.0") is prohibited. If "Primary DNS Server" is blank but a value has been entered for "Secondary DNS Server", an error occurs. You can leave this field blank.	- If "DNS Server Setting" is "Auto", this item is grayed-out.
"Secondary DNS Server"	A text box is provided. Format: "xxx.xxx.xxx.xxx" "xxx": "0"~"255" in decimal. ("0.0.0.0") is prohibited. You can enter the empty.	- If "DNS Server Setting" is "Auto", this item is grayed-out.
"DNS Host Name Setting"	Two radio buttons are provided to choose one of the following: "Auto" / "Manual"	-
"DNS Host Name"	The Device Name is shown.	-
"DNS Domain Name Setting"	Two radio buttons are provided to choose one of the following: "Auto" / "Manual"	-
"DNS Domain Name"	A text box is provided. The string must have 2 to 249 characters and contain "A"~"Z", "a"~"z", "0"~"9", and "-". (Spaces are not allowed.)	- If "DNS Domain Name Setting" is "Auto", this item is grayed-out.

	<p>However, it is necessary to enter no more than 251 characters in total for both the host name and domain name. If this number is exceeded, the configuration is not applied. The leading character must be "A"~"Z" or "a"~"z". ("0"~"9" and "-" are not allowed.)</p> <p>The final character must be "A"~"Z" , "a"~"z", or "0"~"9". ("- " is not allowed.)</p> <p>The number of characters on each label separated by a period (".") must be 1 to 63.</p>	
"Register the network interface address to DNS"	Two radio buttons are provided to choose one of the following: "Enable" / "Disable"	-
"Proxy Server Setting"	"Do Not Use" / "Use"	-
"Proxy Server"	Set the proxy server address in the IPv4 address or FQDN format.	- If "Proxy Server Setting" is "Do Not Use", this item is grayed-out.
"Proxy Server Port Number"	A text box is provided. The string must be "0" to "65535" in decimals.	- If "Proxy Server Setting" is "Do Not Use", this item is grayed-out.
"Proxy Server User Name"	A text box is provided. The string must be from 0 to 255 bytes with characters in ASCII codes (0x20 - 0x7E).	- If "Proxy Server Setting" is "Do Not Use", this item is grayed-out.
"Proxy Server Password"	A text box is provided. The string must be from 0 to 255 bytes with characters in ASCII codes (0x20 - 0x7E). 10 asterisks (*) are displayed when "Proxy Server Setting" is "Use".	- If "Proxy Server Setting" is "Do Not Use", this item is grayed-out.
"IPv6 Setting"	Two radio buttons are provided to choose one of the following: "Enable" / "Disable"	-
"IPv6 Privacy Extension"	Two radio buttons are provided to choose one of the following: "Enable" / "Disable"	- If "IPv6 Setting" is "Disable", this item is grayed-out.
"IPv6 DHCP Server Setting"	Two radio buttons are provided to choose one of the following: "Do Not Use" / "Use"	- If "IPv6 Setting" is "Disable", this item is greyed-out. - Only DHCPv6 support printers.
"IPv6 Address"	<p>You can set empty or in the IPv6 address with prefix. Use the following IPv6 address formats, if you want to set.</p> <ul style="list-style-type: none"> • xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx/prefix <p>"xxxx" is Hexadecimal for one to four digit.</p> <p>"prefix" is 1 - 128 in decimal.</p> <p>You can abbreviate the contiguous "xxxx" consisting of all "0" as "::" on one place in IPv6 address.</p> <p>Shows the error if it consists of following address part.</p> <p>"::/128" "::1/128" "FF00::/8"</p> <p>This item is need to enter if the item of IPv6 Address Default Gateway is entered.</p>	- If "IPv6 Setting" is "Disable", this item is greyed-out.
"IPv6 Address Default Gateway"	<p>You can set empty or in the IPv6 address. Use the following IPv6 address formats, if you want to set.</p> <ul style="list-style-type: none"> • xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx <p>"xxxx" is Hexadecimal for one to four digit.</p> <p>You can abbreviate the contiguous "xxxx" consisting of all "0" as "::" on one place in IPv6 address.</p> <p>Shows the error if it consists of following address part.</p> <p>"::/128" "::1/128" "FF00::/8"</p>	- If "IPv6 Setting" is "Disable", this item is greyed-out.
"IPv6 Link-Local Address"	A valid IPv6 link-local address is shown.	-
"IPv6 Stateful Address "	Shows a valid stateful IPv6 address.	- Only DHCPv6 support printers.
"IPv6 Stateless Address 1"	A valid IPv6 stateless address is shown.	-
"IPv6 Stateless Address 2"	A valid IPv6 stateless address is shown.	-
"IPv6 Stateless Address 3"	A valid IPv6 stateless address is shown.	-
"IPv6 Primary DNS Server"	<p>Set this item in the IPv6 address. Use one of the following formats.</p> <p>xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx</p>	- If "IPv6 Setting" is "Disable", this item is greyed-out.

	<p>"xxxx" indicates one to four digits in Hexadecimal. For "xxxx", the first "0" can be abbreviated, but at least one character is required.</p> <p>Repeated "xxxx" in one location of an IPv6 address that are all "0" can be abbreviated as "::".</p> <p>Shows an error if it includes any of the following address parts.</p> <p>"::/128"</p> <p>"::1/128"</p> <p>"FF00::/8"</p> <p>If "IPv6 Primary DNS Server" is blank but a value has been entered for "IPv6 Secondary DNS Server", an error occurs. You can leave this field blank.</p>	
"IPv6 Secondary DNS Server"	<p>Set this item in the IPv6 address. Use one of the following formats.</p> <p>xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx</p> <p>"xxxx" indicates one to four digits in Hexadecimal. Repeated "xxxx" in one location of an IPv6 address that are all "0" can be abbreviated as "::".</p> <p>Shows an error if it includes any of the following address parts.</p> <p>"::/128"</p> <p>"::1/128"</p> <p>"FF00::/8"</p> <p>You cannot register other IPv6 DNS server addresses that have already been registered. You can leave this field blank.</p>	- If "IPv6 Setting" is "Disable", this item is greyed-out.
"Power Saving(Wi-Fi)"	<p>Two radio buttons are provided to choose either of the following:</p> <p>"Enable" / "Disable"</p>	<p>When selected Built-in Wi-Fi mode:</p> <p>Always displayed.</p> <p>When selected Dongle mode:</p> <p>Displayed if attached Wi-Fi dongle.</p>
<p><Wi-Fi Direct compatible models></p> <p>"Frequency Range (Wi-Fi · Wi-Fi Direct)"</p> <p><Wi-Fi Direct non-compatible models></p> <p>"Frequency Range"</p>	<p>A dropdown list is provided to choose either of the following:</p> <p>"Auto" / "2.4 GHz" / "5 GHz"</p>	<p>When selected Built-in Wi-Fi mode:</p> <p>Displayed on models with 5GHz Wi-Fi chip. Not displayed on models with 2.4GHz Wi-Fi chip.</p> <p>When selected Dongle mode:</p> <p>Displayed with 5GHz dongle. Not displayed with 2.4GHz dongle.</p>
"IEEE802.11k/v"	<p>Two radio buttons are provided to choose either of the followings:</p> <p>"Enable" / "Disable"</p>	<p>For wireless LAN option dongle models, display when the dongle is inserted in the main unit, and hide when not inserted.</p> <p>Displayed on models supporting the IEEE802.11k/v/r function.</p>
"IEEE802.11r"	<p>Two radio buttons are provided to choose either of the followings:</p> <p>"Enable" / "Disable"</p>	<p>For wireless LAN option dongle models, display when the dongle is inserted in the main unit, and hide when not inserted.</p> <p>Displayed on models supporting the IEEE802.11k/v/r function.</p>
"Roaming Setting"	<p>Fixed strings for field name.</p>	<p>Display on models that support Roaming function.</p> <p>For wireless LAN option dongle models, display when the dongle is inserted in the main unit, and hide when not inserted.</p>
"Roaming Setting"	<p>Two radio buttons are provided to choose either of the followings:</p> <p>"Enable" / "Disable"</p>	<p>Display on models that support Roaming function.</p> <p>For wireless LAN option dongle</p>

		models, display when the dongle is inserted in the main unit, and hide when not inserted.
"AP Density"	Dropdowlist are provided to choose either of the followings: "Low" / "Medium" / "High"	Display on models that support Roaming function. If "Roaming Setting" is "Disable", this item is grayed-out. For wireless LAN option dongle models, display when the dongle is inserted in the main unit, and hide when not inserted.

10.3.1.1.3 Button

Table 10-23 Button

Items	Description
"Next"	If pressed, Web Config goes to the Confirm Wi-Fi/Network Settings page.

If Web Config recognizes an error in the entered value after the Next button is pressed, the following error pop-up is shown. If the entered value error occurs multiple times, a high priority is displayed.

Table 10-24 Error Pop-up

Items	Description
"Invalid value below."	This message is shown when the value entered in the text box is invalid. The item names of the corrected values are shown under the message in the left cell. If there are two or more items whose values were corrected, those items are listed line by line.
"The combination of IP Address and Subnet Mask is incorrect." "All the bits in the host address part of the IP address cannot be set to 1."	This message is displayed if all of the bits in the host address portion of the IP address are 1.
"The combination of IP Address and Subnet Mask is incorrect." "All the bits in the host address part of the IP address cannot be set to 0."	This message is displayed if all of the bits in the host address portion of the IP address are 0.
"The combination of Default Gateway and Subnet Mask is incorrect." "All the bits in the host address part of the Default Gateway cannot be set to 1."	This message is displayed if all of the bits in the host address portion of the Default Gateway are 1.
"The combination of Default Gateway and Subnet Mask is incorrect." "All the bits in the host address part of the Default Gateway cannot be set to 0."	This message is displayed if all of the bits in the host address portion of the Default Gateway are 1.
"The combination of IP Address, Subnet Mask and Default Gateway is incorrect." "IP Address and Default Gateway must be on the same network segment as defined by the Subnet Mask."	This message is shown in the following cases. A default gateway has been set, and the network part that indicates the subnet mask is different in the IP address and default gateway.

10.3.1.2 Confirm Page

10.3.1.2.1 Image

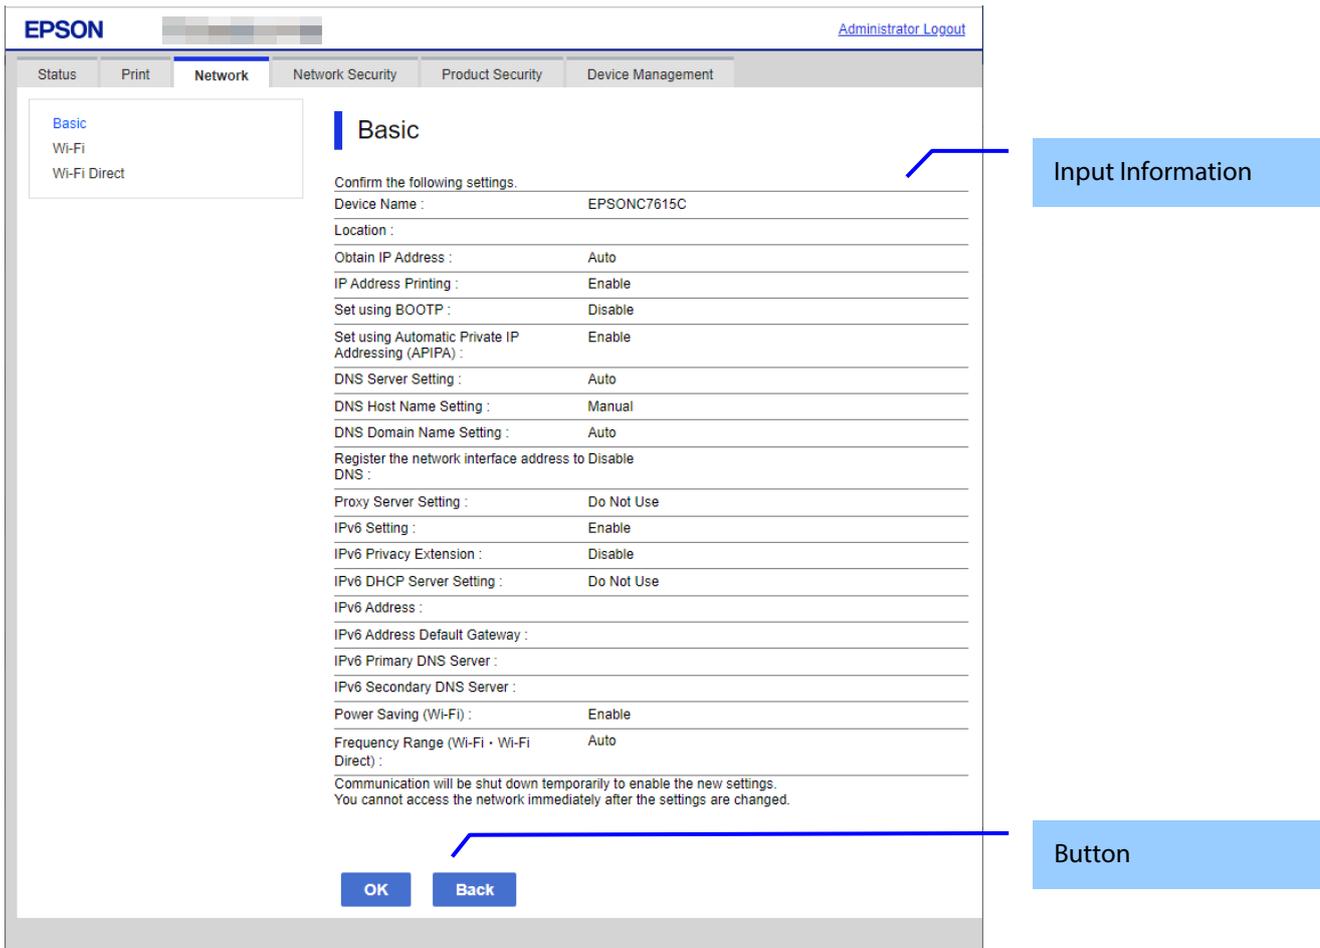


Figure 10-9 Confirm Page

10.3.1.2.2 Input Information

Table 10-25 Input Information

Items	Description
"Confirm the following settings."	This message is shown at the top of the page, followed by the setting items and their values.
"Communication will be shut down temporarily to enable the new settings. You cannot access the network immediately after the settings are changed."	This message is shown at the bottom of the page.

10.3.1.2.3 Button

There is a button to proceed to the remaining settings based on the values entered on this page, and a button to go back to the previous page.

Table 10-26 Button

Items	Description
"OK"	This button is used to apply the entered values to the system shown on the Confirm Wi-Fi/Network Settings page. If pressed, Web Config goes to the Result page.
"Back"	This button is used to go back to the Wi-Fi/Network Settings page.

10.3.1.3 Result Page

The following figure shows the page that is displayed after the network settings are processed. The content of the Result page will vary based on the result (success or failure).

10.3.1.3.1 Image

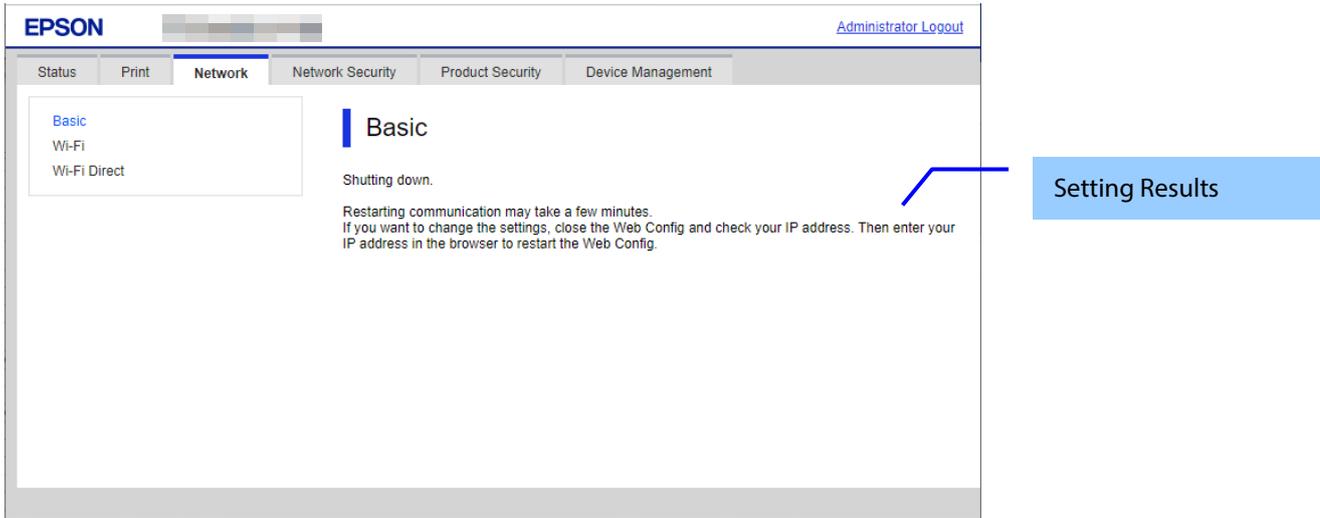


Figure 10-10 Result Page

10.3.1.3.2 Setting Result

Table 10-27 Setting Result

Items	Description
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown if Wi-Fi/Network setup is successful.
"Setup failed."	This message is shown if Wi-Fi/Network setup fails.

10.3.2 Wi-Fi

Only models that support wireless LAN are displayed.

10.3.2.1 Top Page

10.3.2.1.1 Image

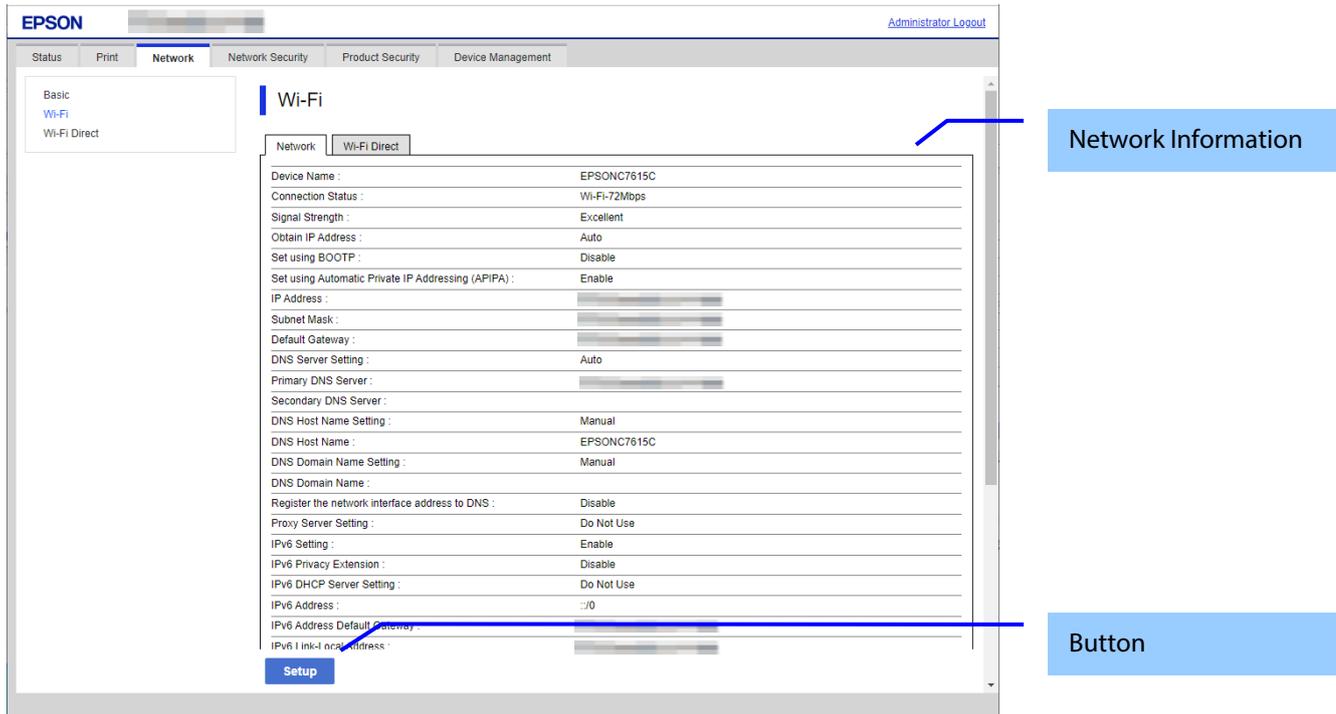


Figure 10-11 Wi-Fi Setup Top Page

10.3.2.1.2 Network Information

Display same contents as Network Status of Status tab.

10.3.2.1.3 Button


The following buttons are supported.

Table 10-28 Button

Items	Description	Condition
"Setup"	This button is used to begin Wi-Fi setup. If pressed, Web Config goes to the SSID Search page.	-

10.3.2.2 SSID Search Page

10.3.2.2.1 Image

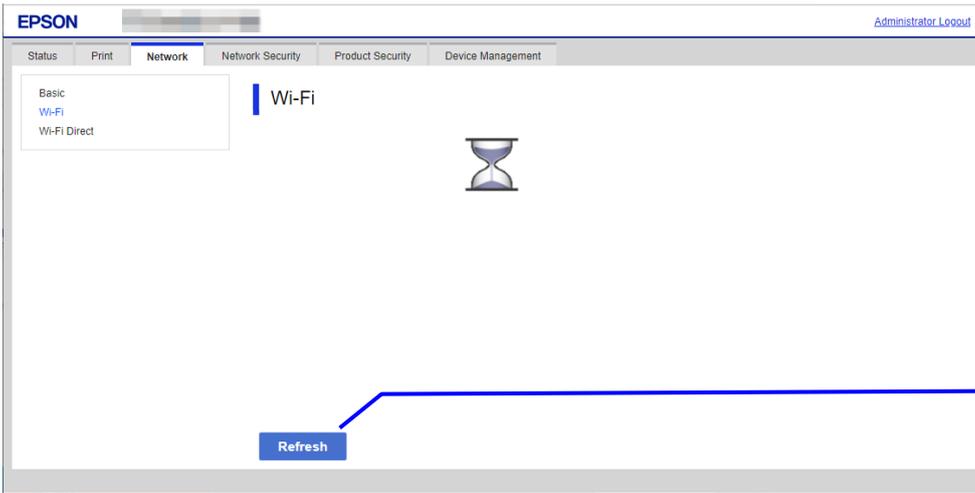

Button

Figure 10-12 SSID Search Page

10.3.2.2.2 Button


Table 10-29 Button

Items	Description
"Refresh"	After the Refresh button is pressed, Web Config goes to the Wi-Fi Settings page if an SSID search has been completed. If an SSID search has not been completed, Web Config remains on the SSID Search page.

10.3.2.3 Wi-Fi Settings Page

If the Web Config confirms periodically that an SSID search has been done triggered by transition to this page or pressing the Refresh button, it goes to the Wi-Fi Settings page as below. You can choose a SSID on the searched SSID list by choosing a radio button or choose a radio button to specify any SSID manually.

10.3.2.3.1 Image

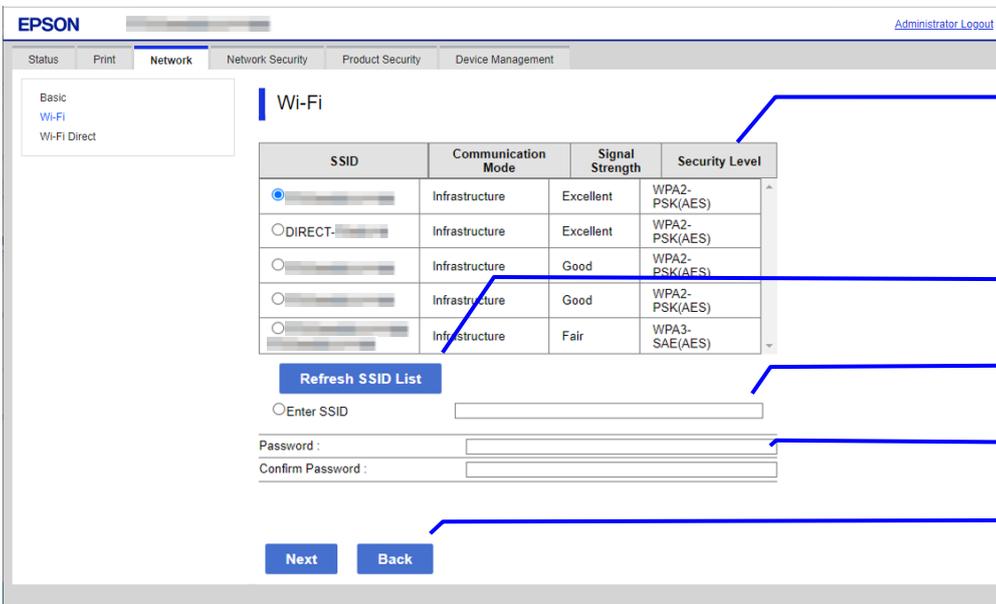

SSID List

Refresh Button

SSID manual input

Password enter

Button

Figure 10-13 Wi-Fi Settings Page

When the “Apply” button is pressed, Web Config displays a pop-up window that shows the following message if it recognizes an error in the entered value.

Table 10-35 Error Pop-up

Items	Description
"Invalid value below."	This message is shown when the value entered for SSID, Password, or Confirm Password is invalid. The item names of the invalid values are shown under the message in the left cell. If there are two or more items whose values were invalid, those items are listed line by line.
"Passwords you entered do not match."	This message is shown if the values entered for Password and Confirm Password do not agree.

10.3.2.4 Confirm Wi-Fi Setup Page

10.3.2.4.1 Image

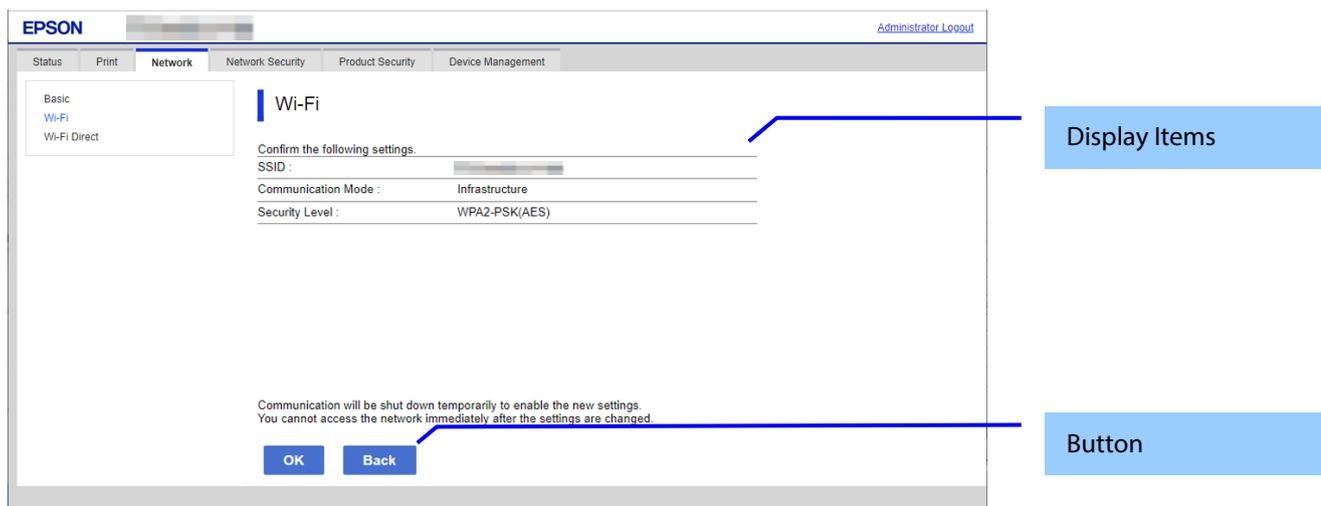


Figure 10-14 Confirm Wi-Fi Setup Page

10.3.2.4.2 Display Items

Table 10-36 Display Items

Items	Description
"Confirm the following settings."	This message is shown at the top of the page.
"SSID"	The value entered on the Wi-Fi Setup page is shown.
"Communication Mode"	The value entered on the Wi-Fi Setup page is shown.
"Security Level"	The value entered on the Wi-Fi Setup page is shown.
"Communication will be shut down temporarily to enable the new settings. You cannot access the network immediately after the settings are changed."	This message is shown at the bottom of the page.

“Security Level” is determined by the values on the Wi-Fi Setting page.

Table 10-37 Value for Security Level

the values of Wi-Fi Setting page		Security Level of Confirm Wi-Fi Setup Page	
SSID	Security Level of selected SSID	Length of Security Level	
- Select "Enter SSID".	-	0	"None"
		5	"WEP-64bit(40bit)"
		Others	"Unknown"
- Select from list.	- "Unknown"	0	"None"
		10 (hexdecimal)	"WEP-64bit(40bit)"
		26(hexdecimal)	"WEP-128bit(104bit)"
		5 (not hexdecimal)	"WEP-64bit(40bit)"
		13 (not hexdecimals)	"WEP-128bit(104bit)"
		Others	"Unknown"
- Others	-	-	- Select Security Level

10.3.2.4.3 Button

There is a button to proceed to Wi-Fi Setup based on the values entered on the Confirm Wi-Fi Setup page, and a button to go back to the previous page.

Table 10-38 Button

Items	Description
"OK"	This button is used to go forward with Wi-Fi Setup based on the values entered on the Confirm Wi-Fi Setup page. If pressed, Web Config goes to the Result page.
"Back"	If pressed, Web Config discards the entered values and goes to the Wi-Fi Settings page.

10.3.2.5 Result Page

10.3.2.5.1 Image

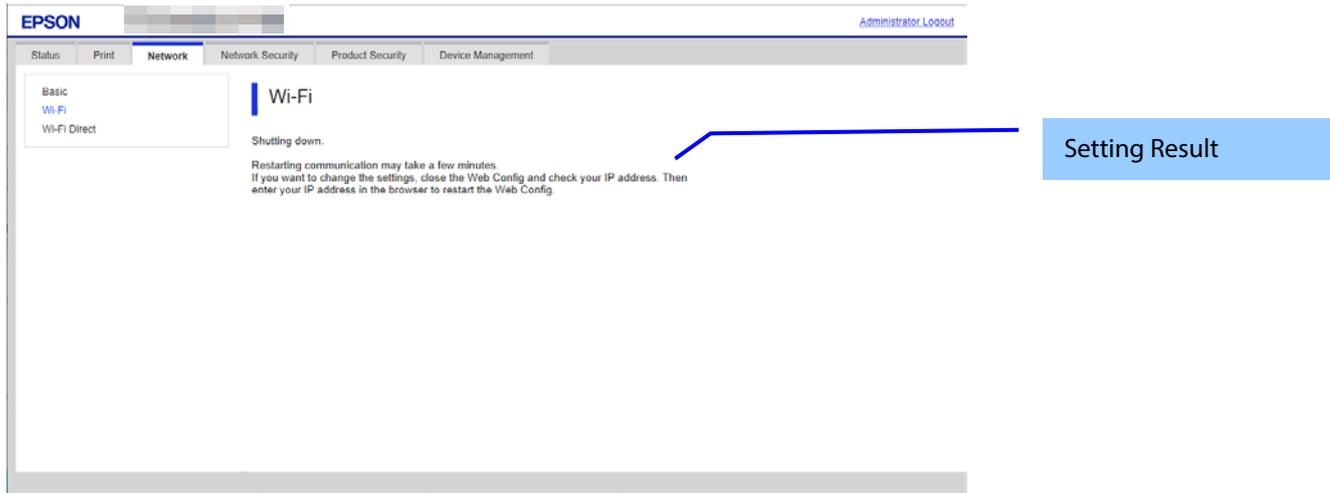


Figure 10-15 Result Page

10.3.2.5.2 Setting Result

Table 10-39 Setting Result

Items	Description
"Setup complete. Restarting communication may take a few minutes. If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown if setup is successful.
"Setup failed."	This message is shown if setup fails.

10.3.3 Wired LAN

Only models that support wired LAN are displayed.

10.3.3.1 Top page

10.3.3.1.1 Image

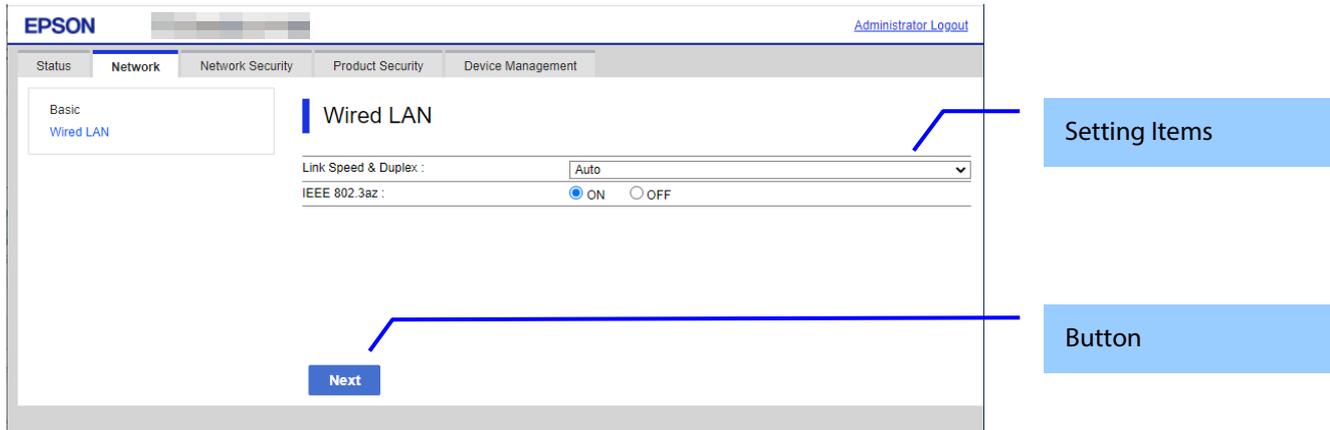


Figure 10-16 Top page

10.3.3.1.2 Setting Items

The following table shows the setting items in Wired LAN Settings.

Table 10-40 Setting Items

Items	Description	Condition
"Link Speed & Duplex"	A drop-down list is provided to choose one of the following: "Auto" / "10BASE-T Half Duplex" / "10BASE-T Full Duplex" / "100BASE-TX Half Duplex" / "100BASE-TX Full Duplex" / "100BASE-TX Auto"	Can be select "100BASE-TX Auto" if model is SoC12H.
"IEEE 802.3az"	Either "ON" / "OFF" can be chosen with a radio button.	-

10.3.3.1.3 Button

The following table shows the setting button in Wired LAN Settings.

Table 10-41 Button

Items	Description
"Next"	If pressed, Web Config goes to the Confirm Wired LAN Settings page.

10.3.3.2 Confirm page

10.3.3.2.1 Image

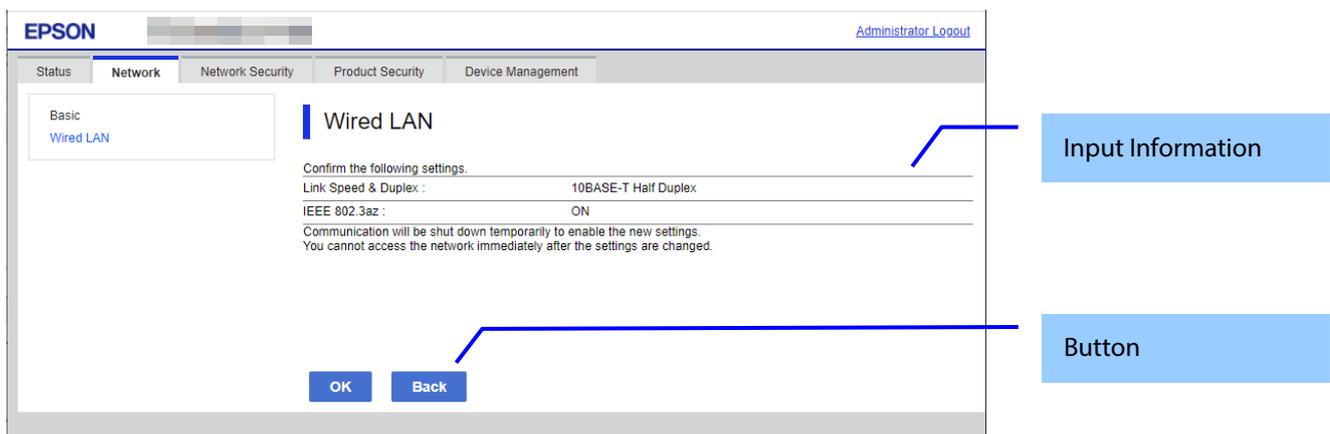


Figure 10-17 Confirm page

10.3.3.2 Input Information

Table 10-42 Input Information

Items	Description
"Confirm the following settings."	This message is shown at the top of the page, followed by the setting items and their values.
"Communication will be shut down temporarily to enable the new settings. You cannot access the network immediately after the settings are changed."	This message is shown at the bottom of the page.

10.3.3.3 Button

There is a button to proceed to the remaining settings based on the values entered on this page, and a button to go back to the previous page.

Table 10-43 Button

Items	Description
"OK"	This button is used to apply the entered values to the system shown on the Confirm Wired LAN Settings page. If pressed, Web Config goes to the Result page.
"Back"	This button is used to go back to the Wired LAN Settings page.

10.3.3.3 Result page

The following figure shows the page that is displayed after the network settings are processed. The content of the Result page will vary based on the result (success or failure).

10.3.3.3.1 Image

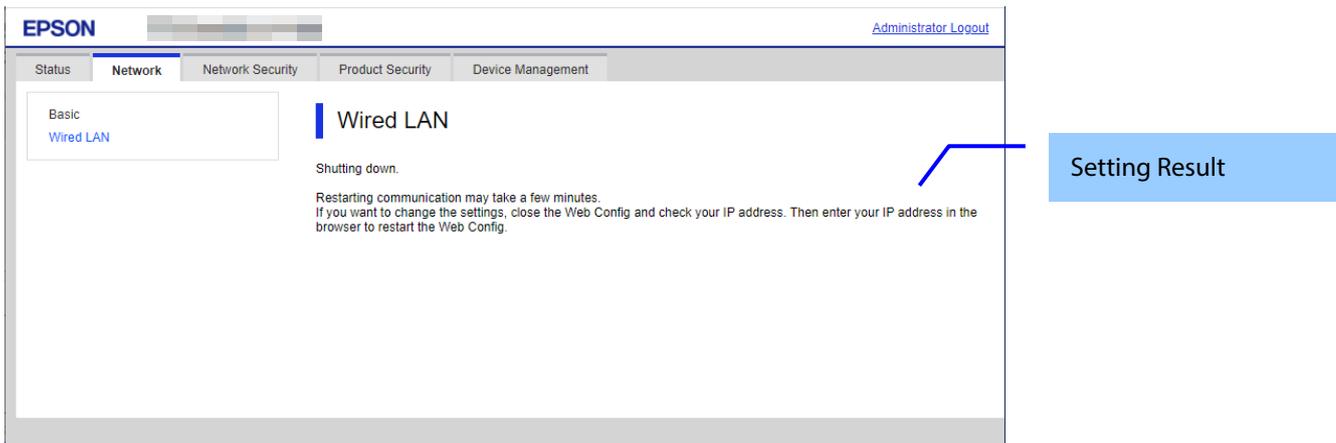


Figure 10-18 Result page

10.3.3.3.2 Setting Result

Table 10-44 Setting Result

Items	Description
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown if setup is successful.
"Setup failed."	This message is shown if Wi-Fi/Network setup fails.

10.3.4 Wi-Fi Direct

In the Wi-Fi Direct area, you can confirm the information for the Wi-Fi Direct connection and change the settings. Only models that support wireless LAN are displayed.

10.3.4.1 Top Page

10.3.4.1.1 Image

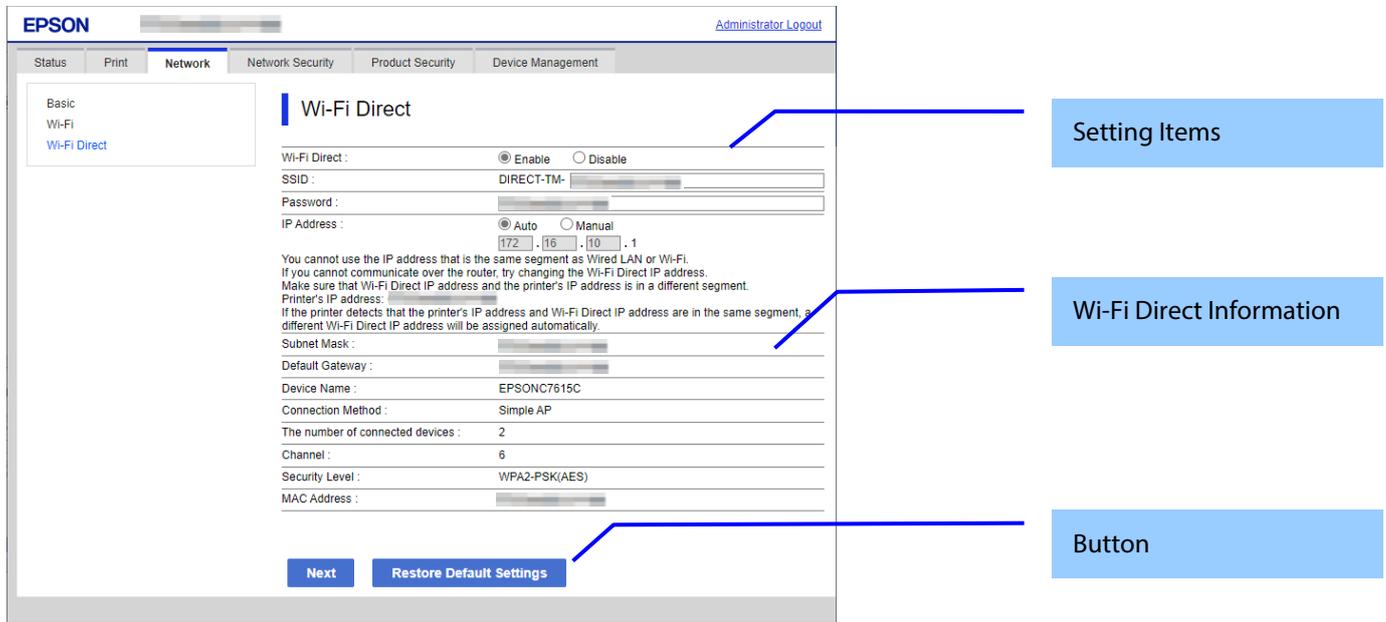


Figure 10-19 Top Page

10.3.4.1.2 Setting Items

The following table shows the items that can be set.

Table 10-45 Setting Items

Items	Description	Condition
"Wi-Fi Direct"	Two radio buttons are provided to choose one of the following: "Enable" / "Disable" If you select "Disable", Wi-Fi Direct (Simple AP) is disabled. If you select "Enable", Wi-Fi Direct (Simple AP) is enabled.	-
"SSID"	Enter 0-22 0x20-0x7F ASCII characters in the text box. "DIRECT-TM-" is displayed as a fixed character string in front of the text box. "DIRECT-TM-" + the character string entered in this text box becomes the SSID name.	Displays only models equipped with Wi-Fi chip.
"Password"	The user can set a password for Wi-Fi Direct. 8 ~ 22 characters in ASCII.	This item is enabled when "Wi-Fi Direct" is "Enable", if it isn't supported other than Wi-Fi chips (, if it is supported Broadcom Wi-Fi chips).
"IP Address"	Two radio buttons are provided to choose one of the following:	If "Wi-Fi Direct" is "Disable", this item is grayed out.

	<p>"Auto" / "Manual"</p> <p>When "manual" is selected, a text box for entering an IP address is displayed. There are three input fields for entering the 8-bit delimiters of the IP address in decimals. The final byte is fixed as "1". "." is displayed between each input fields. If Wi-Fi Direct is enabled, the default value is displayed for the operation value. When it is disabled, the default value is displayed for the setting value if the IP address is set manually. Otherwise, it is blank.</p> <p>A value from 0 to 255 can be entered for each text box. Perform the following check for values that are entered for the IP address. "0.0.0.1"~"0.255.255.1" Loopback address ("127.0.0.1"~"127.255.255.1") Class D address ("224.0.0.1"~"239.255.255.1") Class E address ("240.0.0.1"~"255.255.255.1")</p> <p>A check is also performed for conflicts with IP addresses on wired LAN or wireless LAN (Wi-Fi). If there is an error, it will be displayed in a pop-up window. However, this check is not performed if there is no connection. (The check is performed for up to the 2nd byte of the IP address on wired or wireless LAN.)</p>	<p>The text box is grayed out if the setting is Auto.</p>
<p>"You cannot use the IP address that is the same segment as Wired LAN or Wi-Fi.¶n If you cannot communicate over the router, try changing the Wi-Fi Direct IP address.¶n Make sure that Wi-Fi Direct IP address and the printer's IP address is in a different segment.¶n Printer's IP address: %s¶n If the printer detects that the printer's IP address and Wi-Fi Direct IP address are in the same segment, a different Wi-Fi Direct IP address will be assigned automatically."</p>	<p>Fixed character string displayed in the IP address setting items. "%s" indicates the IP address for the current wired LAN or Wi-Fi.</p>	<p>-</p>

10.3.4.1.3 Wi-Fi Direct Information

The content is the same as the description for the confirmation of the network information.

10.3.4.1.4 Button

The following table shows the buttons on the page.

Table 10-46 Button

Items	Description	Condition
"Next"	This button is for going to the confirmation page.	-
"Restore Default Settings"	If pressed, Web Config restores the setting values to the factory defaults.	This item is displayed for models that use the Wi-Fi chip.

When the "OK" button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-47 Error Pop-up

Items	Description
"Invalid value below."	Shows a warning when a value is entered incorrectly.

10.3.4.2 Confirm Page

10.3.4.2.1 Image

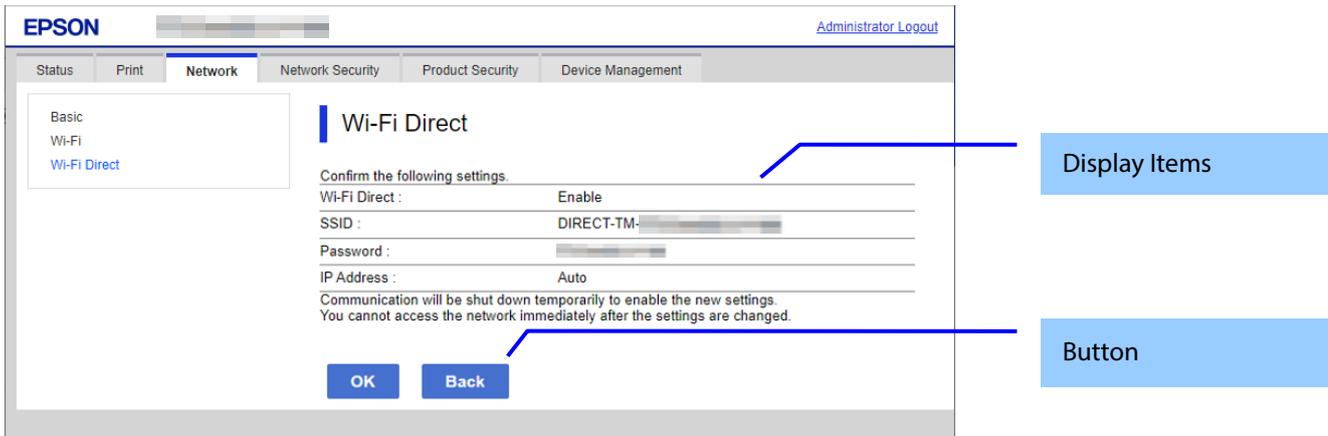


Figure 10-20 Confirm Page

10.3.4.2.2 Display Items

The settings that were entered on the previous page are shown for confirmation after the “Change the following settings” message. The following message is shown below the confirmed settings: “Communication will stop temporarily to enable the new settings. You will not be able to access the network immediately after the settings are changed.”

10.3.4.2.3 Button

The following table shows the buttons on the page.

Table 10-48 Button

Items	Description
"OK"	- Button at the bottom of the main frame to perform settings.
"Back"	- Button at the bottom of the main frame to go back to the previous page.

10.3.4.3 Result Page

The result page is shown in the main frame after the “OK” button is pressed. An error page is shown when Wi-Fi LAN mode is set to IEEE802.11g in the printer. The page is shown when “Delete” is pressed on the previous page.

10.3.4.3.1 Image

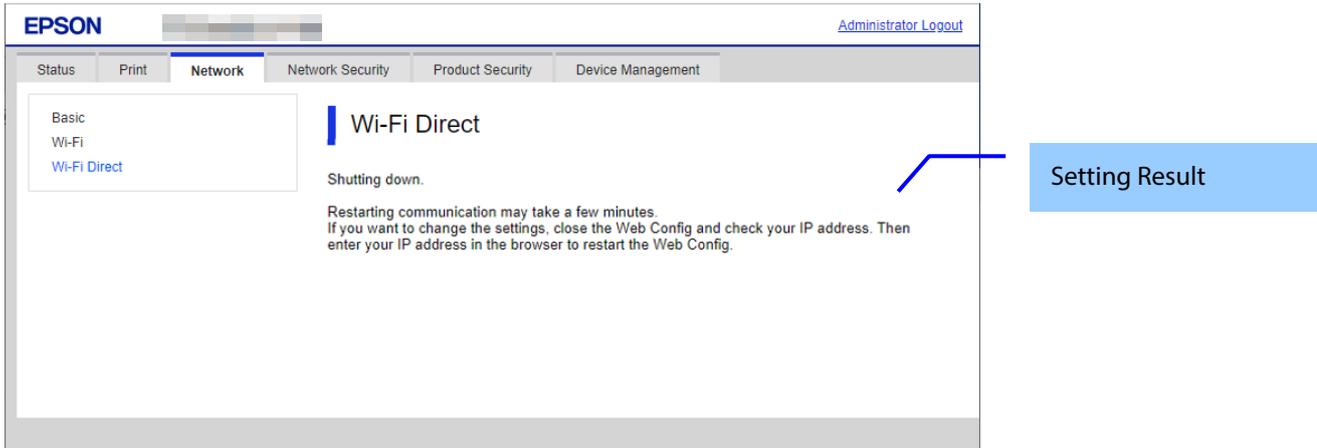


Figure 10-21 Result Page

10.3.4.3.2 Setting Result

Table 10-49 Setting Result

Items	Description
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown if setup is successful.
"Setup complete."	This message is shown when the delete operation is completed successfully.

10.4 Network Security

10.4.1 Protocol

10.4.1.1 Top Page

10.4.1.1.1 Image

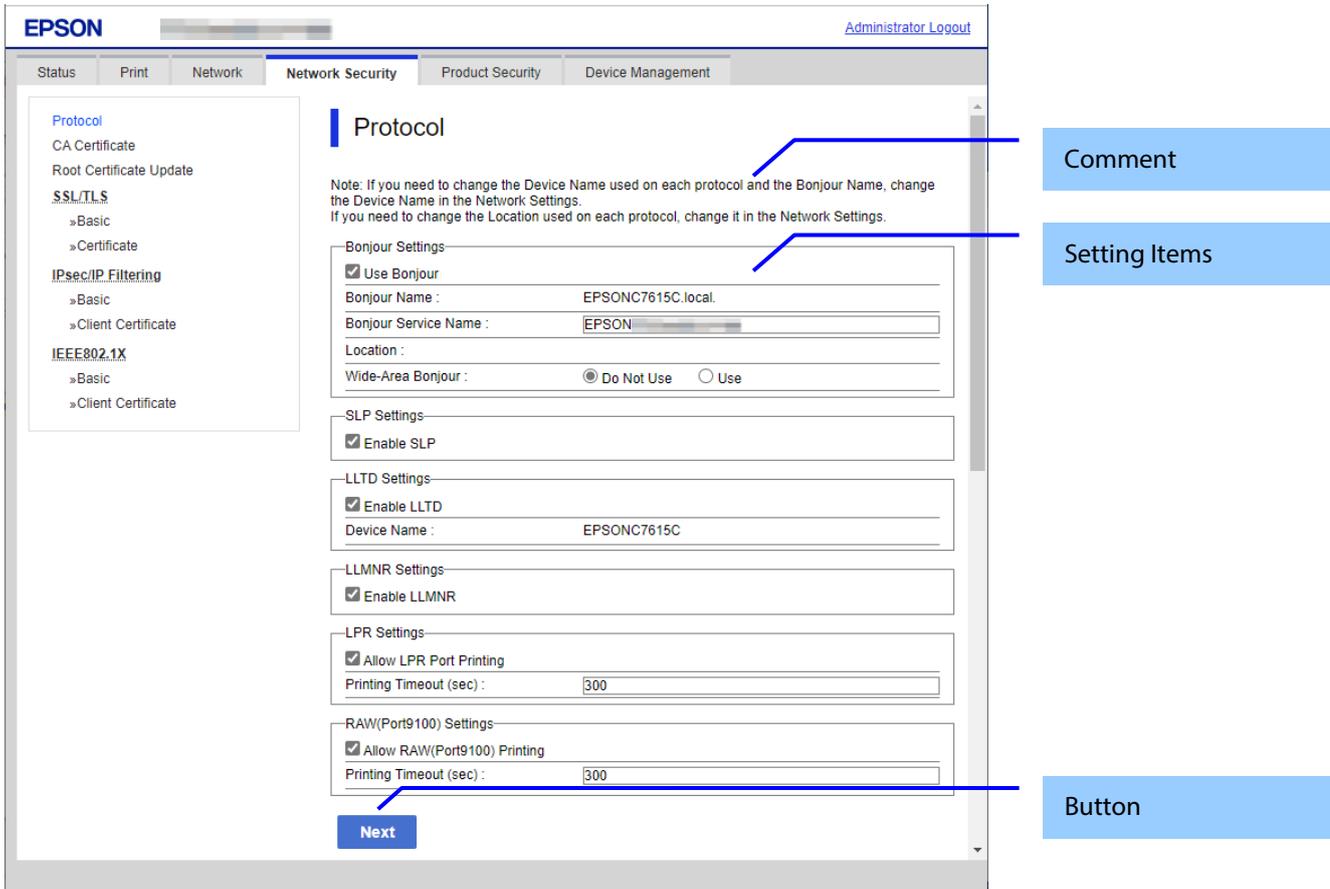


Figure 10-22 Top Page

10.4.1.1.2 Comment

Table 10-50 Comment

Comment	Description
"Note: If you need to change the Device Name and Bonjour Name used for each protocol , change the Device Name in the Network Settings. If you need to change the Location used for each protocol, change it in the Network Settings."	-Fixed Strings

10.4.1.1.3 Setting Items

Table 10-51 Setting Items

Items	Description	Condition
"Bonjour Settings"	Title	-
"Use Bonjour"	Use the check box to choose whether or not to use Bonjour.	-
"Bonjour Name"	Shows the Bonjour name, consisting of the device name and '.local'.	Read only
"Bonjour Service Name"	Use the edit box to set the Bonjour service name. The string must have up to 41 alphanumeric characters (0x20 ~ 0x7E).	Can be entered when "Use Bonjour" is checked.
"Location"	Shows the locations that use Bonjour protocol.	Read only

"Top Priority Protocol"	Use the drop-down list to choose the following options. "Port9100"/"IPP"	Only RAW (Port9100) and IPP support products. Can be entered, when "Use Bonjour" is checked.
"iBeacon Settings"	Title	Only printers that support iBeacon
"Enable iBeacon Transmission"	Use the check box to choose whether or not to enable iBeacon .	Only iBeacon support printers
"SLP Settings"	Title	-
"Enable SLP"	Use the check box to choose whether or not to enable SLP.	-
"WSD Settings"	Title	-
"Enable WSD"	Use the check box to choose whether or not to enable WSD.	-
"Scanning Timeout (sec)"	Use the edit box to set the timeout for WSD. (3 ~ 3600 seconds)	Can be entered, when "Enable WSD" is checked. Only printers that support WSD Scan
"Device Name"	Shows the device names that use WSD. The value can be changed from Wi-Fi/Network setup.	Read only
"Location"	Shows the locations that use WSD. The value can be change from the Wi-Fi/Network setup.	Read only
"LLTD Settings"	Title	-
"Enable LLTD"	Use the check box to choose whether or not to enable LLTD.	-
"Device Name"	Shows the device names that use LLTD. The value can be changed from Wi-Fi/Network setup.	Read only
"LLMNR Settings"	Title	-
"Enable LLMNR"	Use the check box to choose whether or not to enable LLMNR.	-
"LPR Settings"	Title	Only printers that support LPR
"Allow LPR Port Printing"	Use the check box to choose whether or not to allow LPR port printing	Only LPR support printer.
"Printing Timeout (sec)"	Use the edit box to set the timeout for LPR port printing (0 ~ 3600 seconds)	Only LPR support printer. Can be entered, when "Allow LPR Port Printing" is checked.
"RAW (Port9100) Settings"	Title	Only printers that support RAW (Port9100)
"Allow RAW(Port9100) Printing"	Use the check box to choose whether or not to allow RAW port printing	Only RAW(Port9100) support printer.
"Printing Timeout (sec)"	Use the edit box to set the timeout for RAW port printing (0 ~ 3600 seconds)	Only printers that support RAW (Port9100) Can be entered, when "Allow RAW (Port9100) Printing" is checked.
"RAW(Custom Port) Settings"	Title	Only RAW(Custom Port) support device.
"Allow RAW(Custom Port) Printing"	Use the check box to choose whether or not to allow RAW (Custom Port) printing.	Only RAW(Custom Port) support device.
"Port Number"	The user can set the port number. 1024 ~ 65535 (Except for 9100, 1865, 2968)	Only RAW(Custom Port) support device. Enabled when checked "Allow RAW(Custom Port) Printing".
"Printing Timeout(sec)"	Use the edit box to set the timeout for RAW (Custom Port) printing. (0 ~ 3600 sec)	Only RAW(Custom Port) support device. Enabled when checked "Allow RAW(Custom Port) Printing".
"IPP Settings"	Title	Only IPP support printer.

"Enable IPP"	You can choose whether or not to enable the IPP using the check box.	Only IPP support printer.
"Allow Non-secure Communication"	"Allowed"/"Not Allowed" can be selected by radio button.	Only IPP support printer.
"Communication Timeout (sec)"	You can set the timeout used the IPP using the edit box. (3-3600 seconds)	Only IPP support printer. Can be entered, when "Enable IPP" is checked.
"Require PIN Code when using IPP printing"	"Yes"/"No" can be selected by radio button.	Only IPP support printer. Can be entered, when "Enable IPP" is checked. Only PIN Printing support printer.
"URL(Network)"	The following two URLs are shown http://xxx.xxx.xxx.xxx:yyy/ipp/print http s ://xxx.xxx.xxx.xxx:yyy/ipp/print "xxx.xxx.xxx.xxx": IPv4 address "yyy": Port number "ipp/print": IPP Printer Name	Read only Only IPP support printer. Only Wired/Wireless LAN connect.
"URL(Wi-Fi Direct)"	The following two URLs(Wi-Fi Direct) are shown http://xxx.xxx.xxx.xxx:yyy/ipp/print http s ://xxx.xxx.xxx.xxx:yyy/ipp/print "xxx.xxx.xxx.xxx": IPv4 address "yyy": Port number "ipp/print": IPP Printer Name	Read only Only IPP support printer. Only Wi-Fi Direct connect.
"Printer Name"	Shows the device name used IPP. The value can be changed from Wi-Fi/Network setup.	Read only Only IPP support printer.
"Location"	Shows the location used IPP. The value can be change from AirPrint setting or Wi-Fi/Network setup.	Read only Only IPP support printer.
"SNMPv1/v2c Settings"	Title	Only SNMPv3 support printer.
"Enable SNMPv1/v2c"	You can choose whether or not to enable SNMPv1/v2c using the check box.	This item is displayed when the device supports SNMPv3 function and not support SNMPv1/v2c Individual Setting.
"Access Authority"	Use the drop-down list to choose the following options. "Read Only" / "Read/Write"	Only SNMPv3 support printer. Can be entered, when "Enable SNMPv1/v2c" is checked.
"Community Name(Read Only)"	Use the text box to set the Community Name (Read Only). 0 ~ 32 characters in ASCII	Only SNMPv3 support printer. Can be entered, when "Enable SNMPv1/v2c" is checked.
"Community Name(Read/Write)"	Use the text box to set the Community Name (Read/Write). 0 ~ 32 characters in ASCII	Only SNMPv3 support printer. Can be entered, when "Enable SNMPv1/v2c" is checked.
"IP Trap1"	Title of field which contains below 4 items.	This item is displayed on SIDM.
"Enable IP Trap 1"	User can choose enable or disable with the check box.	This item is displayed on SIDM.
"Address"	User can set IPv4 address with textbox.	This item is displayed on SIDM.
"Community Name"	User can set strings with the textbox. 0 ~ 32 characters in ASCII	This item is displayed on SIDM.
"Port Number"	User can set 0 ~ 65535 with the textbox.	This item is displayed on SIDM.
"IP Trap2"	Title of field which contains below 4 items.	This item is displayed on SIDM.
"Enable IP Trap 2"	User can choose enable or disable with the check box.	This item is displayed on SIDM.
"Address"	User can set IPv4 address with textbox.	This item is displayed on SIDM.
"Community Name"	User can set strings with the textbox. 0 ~ 32 characters in ASCII	This item is displayed on SIDM.
"Port Number"	User can set 0 ~ 65535 with the textbox.	This item is displayed on SIDM.
"IP Trap3"	Title of field which contains below 4 items.	This item is displayed on SIDM.
"Enable IP Trap 3"	User can choose enable or disable with the check box.	This item is displayed on SIDM.
"Address"	User can set IPv4 address with textbox.	This item is displayed on SIDM.
"Community Name"	User can set strings with the textbox. 0 ~ 32 characters in ASCII	This item is displayed on SIDM.
"Port Number"	User can set 0 ~ 65535 with the textbox.	This item is displayed on SIDM.
"IP Trap4"	Title of field which contains below 4 items.	This item is displayed on SIDM.
"Enable IP Trap 4"	User can choose enable or disable with the check box.	This item is displayed on SIDM.
"Address"	User can set IPv4 address with textbox.	This item is displayed on SIDM.
"Community Name"	User can set strings with the textbox. 0 ~ 32 characters in ASCII	This item is displayed on SIDM.

"Port Number"	User can set 0 ~ 65535 with the textbox.	This item is displayed on SIDM.
"SNMPv3 Settings"	Title	Only SNMPv3 support printer.
"Enable SNMPv3"	Use the check box to choose whether or not to enable SNMPv3.	Only printers that support SNMPv3
"User Name"	Use the text box to set the User Name. 1 ~ 32 bytes in UTF-8	Only printers that support SNMPv3 Can be entered, when "Enable SNMPv3" is checked.
"Authentication Settings"	Title	Only SNMPv3 support printer.
"Algorithm"	You can choose the following options using the pull-down list. "MD5" / "SHA-1" / "SHA-224" / "SHA-256" / "SHA-384" / "SHA-512"	Only SNMPv3 support printer. Can be entered, when "Enable SNMPv3" is checked. "SHA-224" / "SHA-256" / "SHA-384" / "SHA-512" will only appear when the RED feature is enabled.
"Password"	Use the text box to set the Password. 8 ~ 32 bytes, in ASCII and masked. If 10 asterisks (*) are entered when the password field is blank, the setting fails.	Only SNMPv3 support printer. Can be entered, when "Enable SNMPv3" is checked.
"Confirm Password"	Same as Password.	Same as Password.
"Encryption Settings"	Title	Only SNMPv3 support printer.
"Algorithm"	Use the drop-down list to choose the following options. "DES" / "AES-128"	Only SNMPv3 support printer. Can be entered, when "Enable SNMPv3" is checked.
"Password"	Use the text box to set the Password. 8 ~ 32 bytes, in ASCII and masked. If 10 asterisks (*) are entered when the password field is blank, the setting fails.	Only SNMPv3 support printer. Can be entered, when "Enable SNMPv3" is checked.
"Confirm Password"	Same as Password.	Same as Password.
"Context Name"	Use the text box to set the Context Name. 0 ~ 32 bytes in UTF-8	Only SNMPv3 support printer. Can be entered, when "Enable SNMPv3" is checked.
"ePOS-Print"	Title	This item is displayed on devices which have ePOS-Print Lite.
"Enable ePOS-Print"	User can select whether or not to enable SpectroProofer using the check box.	This item is displayed on devices which have ePOS-Print Lite.
"Version"	ePOS-Print version is displayed.	This item is displayed on devices which have ePOS-Print Lite.
"Device ID"	A-Z, a-z, 0-9 and underscore, period, and hyphen character. You can set the Device ID using the text box.	This item is displayed on devices which have ePOS-Print Lite. This item is enabled when "Enable ePOS-Print" is checked.

10.4.1.1.4 Button

The following table shows the buttons on the page.

Table 10-52 Button

Items	Description
"Next"	The button for going to the confirmation page is at the bottom of the main frame. For RED-compliant printers, a security warning pop-up will appear before transitioning to the confirm entry page.

When the "Next" button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-53 Error Pop-up

Items	Description
"Invalid value below." "-WSD Settings > Timeout"	Shows a warning when a value is entered incorrectly.
"Passwords you entered do not match." "-SNMPv3 Settings > "	When the password and the confirmation password do not match, this message is shown.

When the "Next" button is pressed, if there is no error in the input value and the following display conditions are met, a warning dialog is displayed.

Table 10-54 Security warning pop-up

Items	Description
<p>"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"</p>	<p>For RED-compliant printers, clicking the "Next" button will display a confirmation pop-up. "Top Priority Protocol" "Enable WSD" "LPR Settings" "RAW (Port9100) Settings" "RAW(Custom Port) Settings" "IPP Settings" "Enable FTP Server" "SNMPv1/v2c Settings" "SNMPv3 Settings" "SNMPv1/v2c Settings" is displayed only if the user can enable/disable these settings.</p>

10.4.1.2 Confirmation Page

10.4.1.2.1 Image

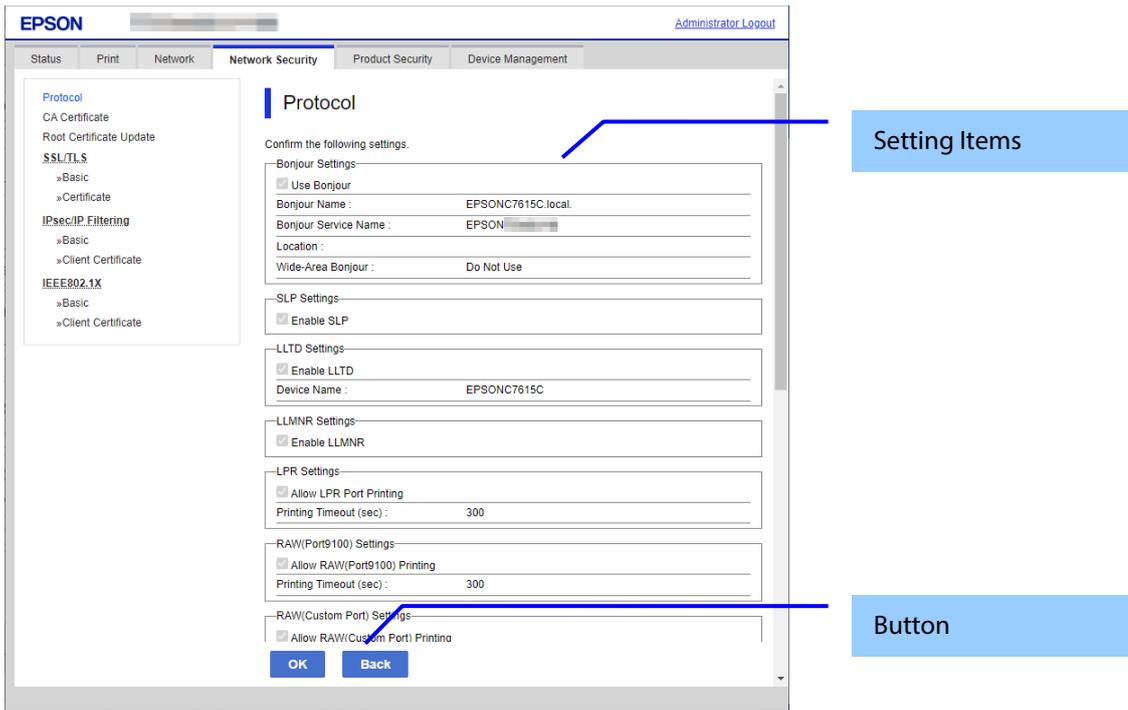


Figure 10-23 Confirmation Page

10.4.1.2.2 Setting Items

The settings entered on the previous page are shown for confirmation, after the message “Change the following settings”. The following message is shown below the confirmed settings.

“Communication will be shut down temporarily to enable the new settings.”

“ You will not be able to access the network immediately after the settings are changed.”

10.4.1.2.3 Button

The following table shows the buttons on the page.

Table 10-55 Button

Items	Description
"OK"	- Button at the bottom of the main frame to perform settings.
"Back"	- Button at the bottom of the main frame to go back to the previous page.

10.4.1.3 Result Page

10.4.1.3.1 Image

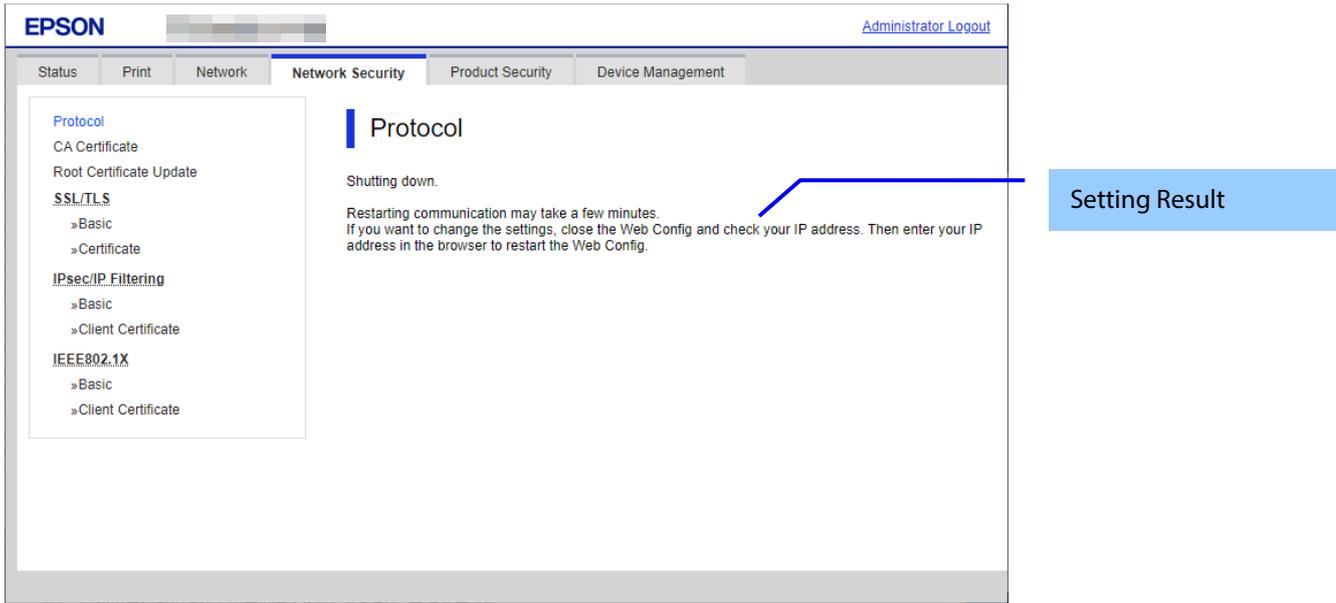


Figure 10-24 Result Page

10.4.1.3.2 Setting Result

Table 10-56 Setting Result

Items	Description
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	-This message is shown when the settings are completed. The network shuts down in order to update.
"Setup failed."	- This message is shown if the settings fail.

10.4.2 CA Certificate

10.4.2.1 Top Page

On the CA Certificate top page, you can import, display, and delete CA Certificate. If importing or deleting is successful, this page is shown. The following figure shows the layout of the CA Certificate top page.

10.4.2.1.1 Image

The following figure shows the layout of the top page.

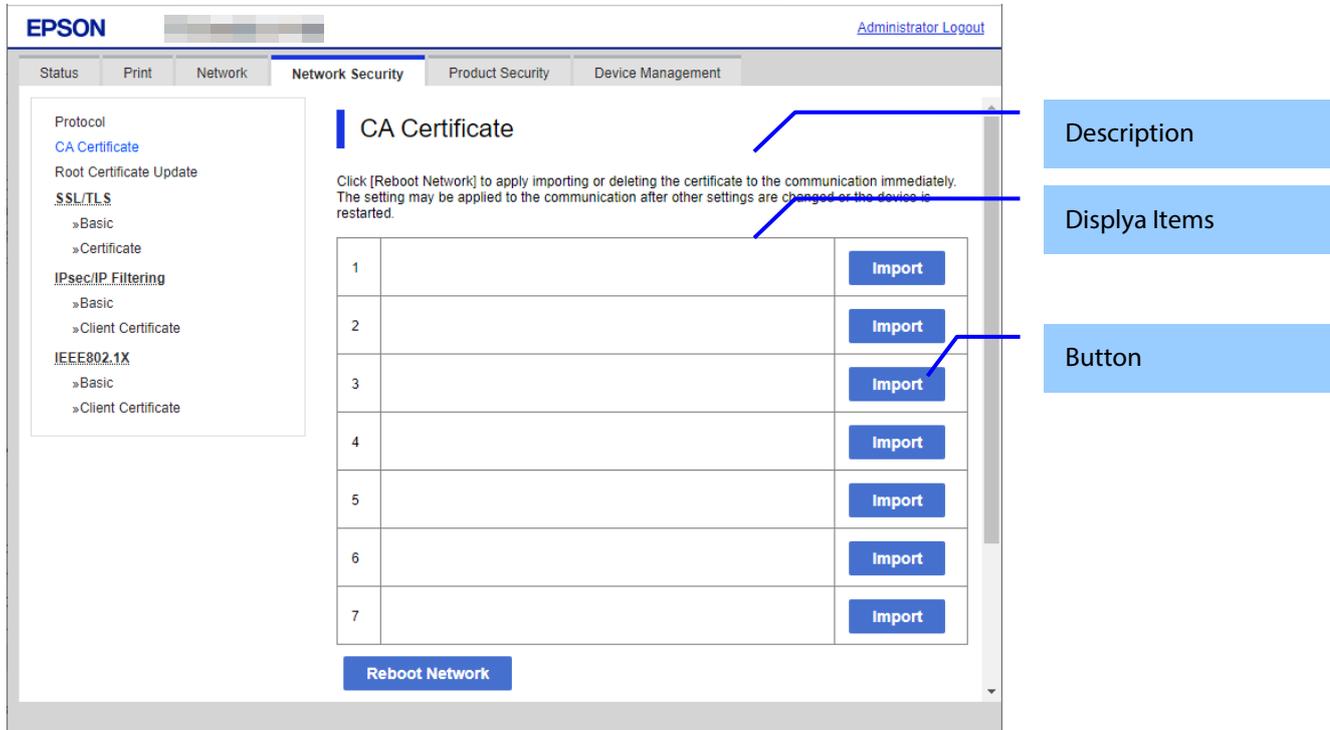


Figure 10-25 Top Page

10.4.2.1.2 Description Items

Table 10-57 Description

Items	Description
"Click [Reboot Network] to apply importing or deleting the certificate to the communication immediately."	Fixed Strings
"The setting may be applied to the communication after other settings are changed or the device is restarted."	Fixed Strings

10.4.2.1.3 Display Items

Table 10-58 Display Items

Items	Description
"1"	- Shows the content of the server certificate imported into the printer.
"2"	Same as above
"3"	Same as above
"4"	Same as above
"5"	Same as above
"6"	Same as above
"7"	Same as above
"8"	Same as above
"9"	Same as above
"10"	Same as above

10.4.2.1.4 Button

Table 10-59 Button

Items	Description	Condition
"Import"	Button used to import CA certificate	This button is shown when CA Certificate is not imported.
"Delete"	Button used to delete the imported CA certificate	This button is shown when CA Certificate is imported.
"Reboot Network"	Button used to reboot network functions	-

The pop-up window is shown when the "Delete" button of the CA certificate setting is pressed. The following figure shows the layout of the page for deleting the CA certificate.

Table 10-60 Pop-up window

Items	Description
"The certificate of No. %d will be deleted."	Static strings
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	This is displayed for RED-compliant printers.

The pop-up window is shown when the "Reboot Network" button on the CA certificate page is pressed. The following figure shows the layout of the page for rebooting the network.

Table 10-61 Pop-up window

Items	Description
"The network will be rebooted." "Communication will be shut down temporarily."	Static strings.

10.4.2.2 Import Page

The page is shown after the 'Import' button is pressed.

The following figure shows the layout of the page for importing the CA certificate into the printer.

10.4.2.2.1 Image

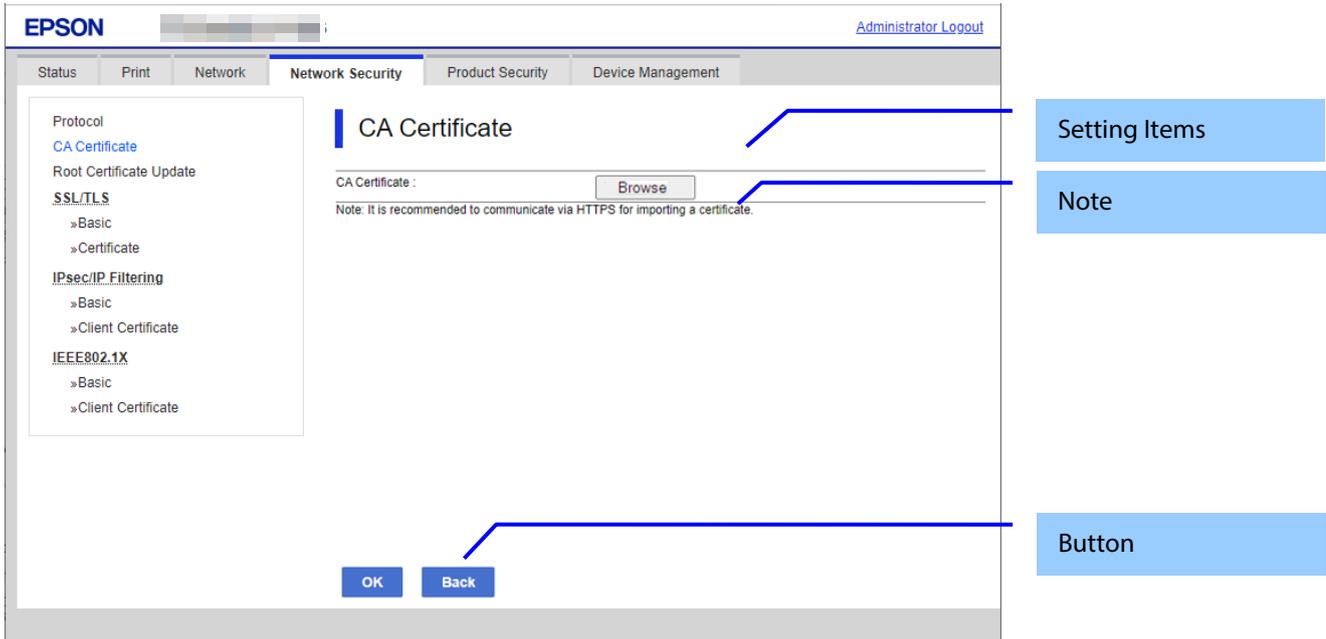


Figure 10-26 Import Page

10.4.2.2.2 Setting Items

Table 10-62 Setting Items

Items	Description
"CA Certificate"	-Enter the file of the CA certificate to import it into the printer. You can also use the file button to select the file.

10.4.2.2.3 Note

The following table shows the note on the CA Certificate Import page.

Table 10-63 Note

Items	Description
"Note: It is recommended to communicate via HTTPS for importing a certificate."	Fixed Strings

10.4.2.2.4 Button

Table 10-64 Button

Items	Description
"OK"	-Button at the bottom of the main frame to perform importing. After the "Import" button is pressed, Web Config displays one of the following pages depending on the result. - If importing is successful, the top page is shown in the main frame. - If importing fails, the result page is shown in the main frame. - If the entered value is invalid, a pop-up window is shown. - For RED-compliant printers, a security warning pop-up will appear before transitioning to the next page.
"Back"	Button at the bottom of the main frame for going back to the top page of the CA Certificate settings.

Table 10-65 Error Pop-up Window

Items	Description
"Select a CA Certificate."	This message is shown when the file of the CA Certificate is not selected.

Table 10-66 Security warning pop-up

Items	Description
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	For RED-compliant printers, clicking the "Next" button will display a confirmation pop-up.

10.4.2.3 Result Page

After the "Import" button is pressed, the top page is shown in the main frame if importing is successful.
After the "Import" button is pressed, the result is shown in the main frame if importing fails.

10.4.2.3.1 Image

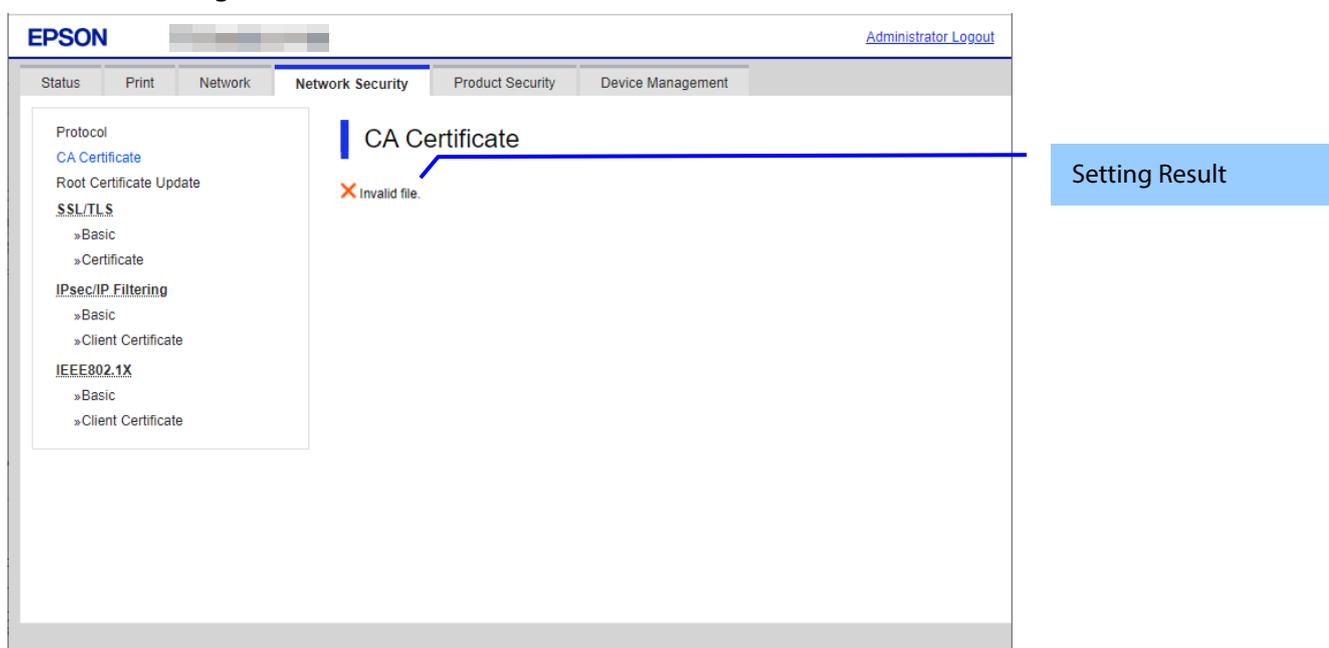


Figure 10-27 Result Page

10.4.2.3.2 Setting Result

Table 10-67 Result

Items	Description
"Invalid file."	This message is shown in the following cases. - The file uses an incorrect format or wrong interrelation. - The file size is greater than the stipulated range of 5k to 24k. (See the note.)
"Invalid date and time."	This message is shown when an expired certificate is imported, and the date and time are not set.
"The certificate has expired. Check if the certificate is valid, or check the date and time on the product."	This message is shown when an expired certificate is imported, and the date and time are already set.
" Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown when network rebooting is successful.
"Setup failed."	This message is shown when importing or network rebooting fails.

Note: If the size of a certificate to be imported is larger than 24KBytes, the device is unable to read it and a Web browser error is shown.

10.4.3 Root Certificate Update

10.4.3.1 Top Page

The root certificate update function on the Web Config downloads a root certificate file from the server provided by Epson and updates the printer files.

10.4.3.1.1 Image

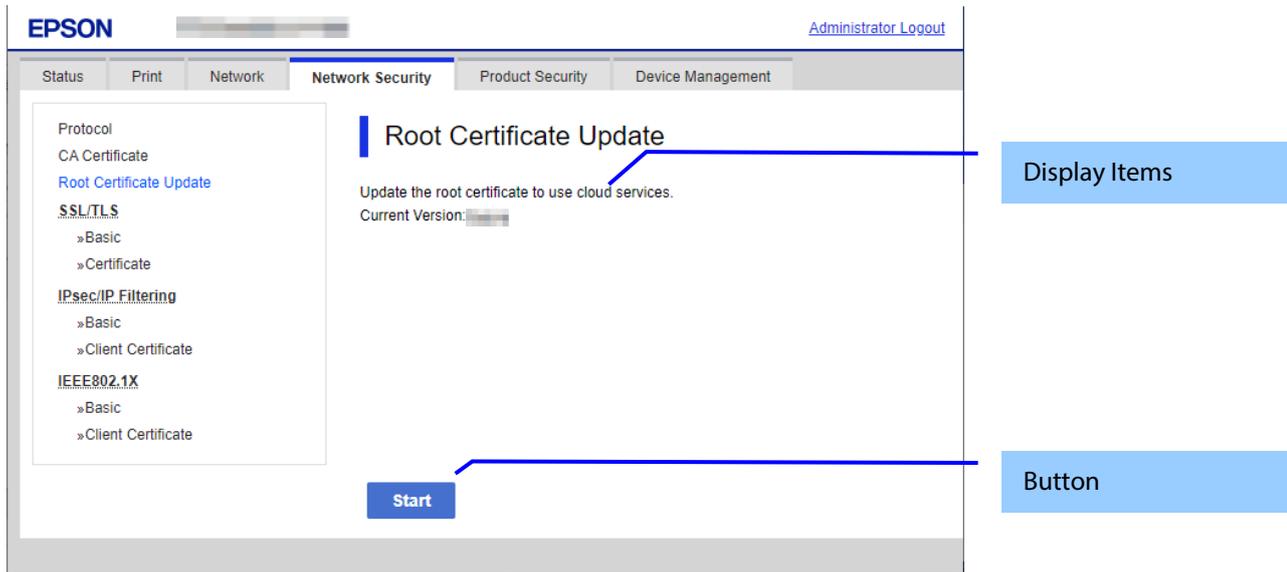


Figure 10-28 Top Page

10.4.3.1.2 Description

Table 10-68 Description

Items	Description
"Update the root certificate to use cloud services."	Fixed Strings

10.4.3.1.3 Button

Table 10-69 Button

Items	Description
"Start"	Press to change to the progress page.

10.4.3.2 Progress Page

10.4.3.2.1 Image

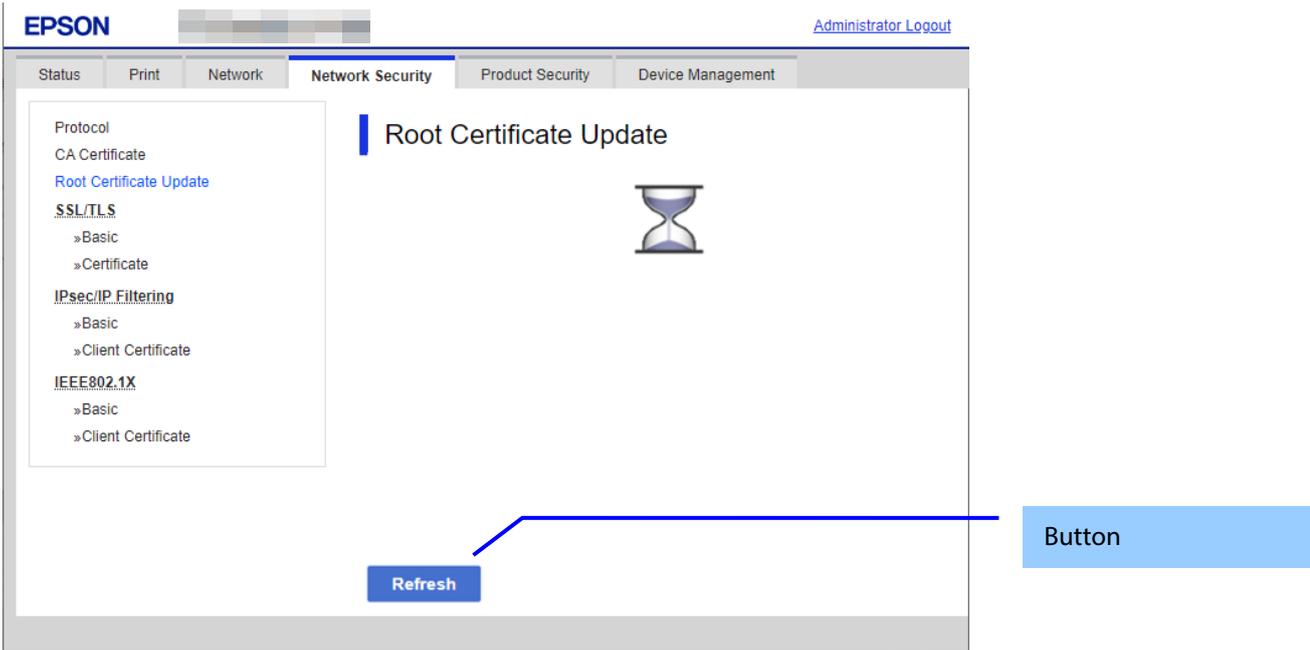


Figure 10-29 Progress Page

10.4.3.2.2 Button

Table 10-70 Button

Items	Description
"Refresh"	Moves to the results page if the search is completed or remains on the current page if the search has not been completed.

10.4.3.3 Result Page

10.4.3.3.1 Image

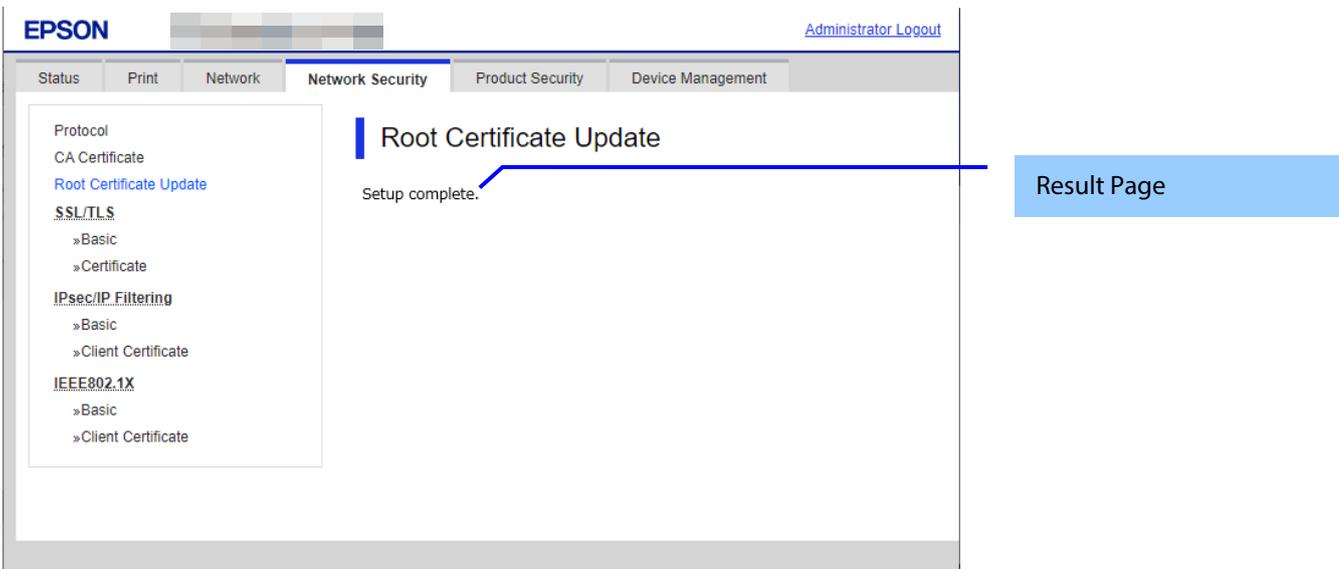


Figure 10-30 Result Page

10.4.3.3.2 Result

Table 10-71 Result

Items	Description
"Setup complete."	This message is shown when the settings are completed.
"⊗ You have the latest root certificate."	The root certificate is most recent.
"⊗ Cannot connect to the Epson server."	The printer could not access the server.
"⊗ The operation failed."	The product is processing. The printer is being configured.

10.4.4 SSL/TLS

In the SSL/TLS settings area, you can configure the settings related to the HTTP server the printer supports.

Table 10-72 Sub menu

Sub menu
"Basic"
"Certificate"

10.4.4.1 Basic

10.4.4.1.1 Top Page

10.4.4.1.1.1 Image

The following figure shows the layout of the top page.

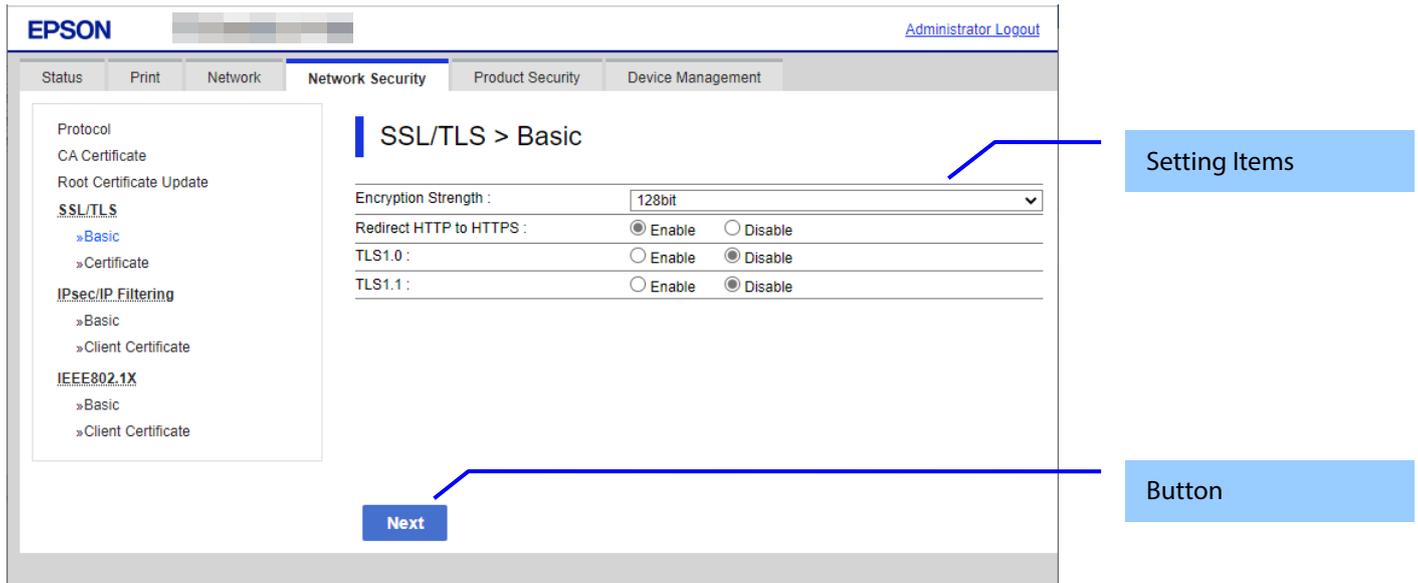


Figure 10-31 Top Page

10.4.4.1.1.2 Setting Items

Table 10-73 Setting Items

Items	Description
"Encryption Strength"	-Use the drop-down list to choose the strength of the encryption. "80bit" / "112bit" / "128bit" / "192bit" / "256bit"
"Redirect HTTP to HTTPS"	- You can change whether or not the printer allows redirecting HTTP to HTTPS. "Enable" / "Disable"
"TLS1.0"	Two radio buttons are provided to choose either of the following: "Enable" / "Disable"
"TLS1.1"	Two radio buttons are provided to choose either of the following: "Enable" / "Disable"

10.4.4.1.1.3 Button

Table 10-74 Button

Items	Description
"Next"	There is the button at the bottom of the confirmation page. For RED-compliant printers, a security warning pop-up will appear before transitioning to the confirm entry page.

Table 10-75 Security warning pop-up

Items	Description
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	For RED-compliant printers, clicking the "Next" button will display a confirmation pop-up.

10.4.4.1.2 Confirming Page

The confirmation page appears when the “Next” button is pressed on the previous settings page.

10.4.4.1.2.1 Image

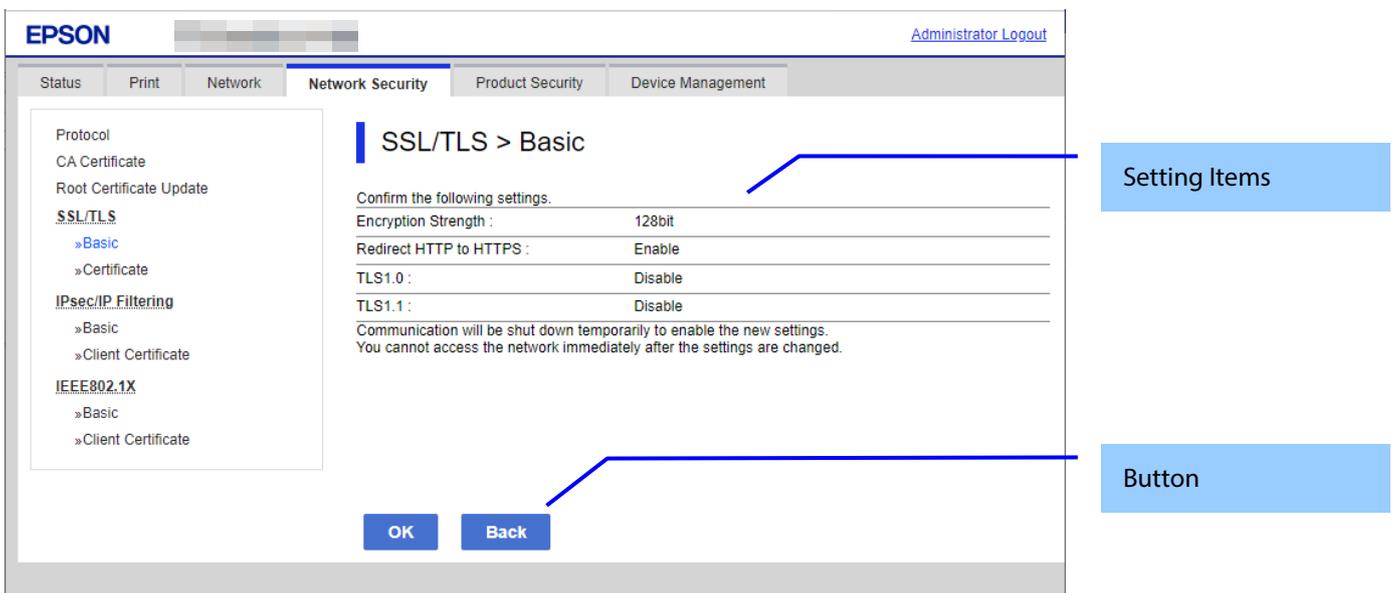


Figure 10-32 Confirming Page

10.4.4.1.2.2 Setting Items

The settings entered on the previous page are shown for confirmation, after the message “Change the following settings”. The following message is shown below the confirmed settings.

“Communication will be shut down temporarily to enable the new settings.”

“You will not be able to access the network immediately after the settings are changed.”

10.4.4.1.2.3 Button

The following table shows the buttons on the page.

Table 10-76 Button

Items	Description
"OK"	- Button at the bottom of the main frame to perform settings.
"Back"	- Button at the bottom of the main frame to go back to the previous page.

10.4.4.1.3 Result Page

The following result is shown in the main frame after the “OK” button is pressed.

10.4.4.1.3.1 Image

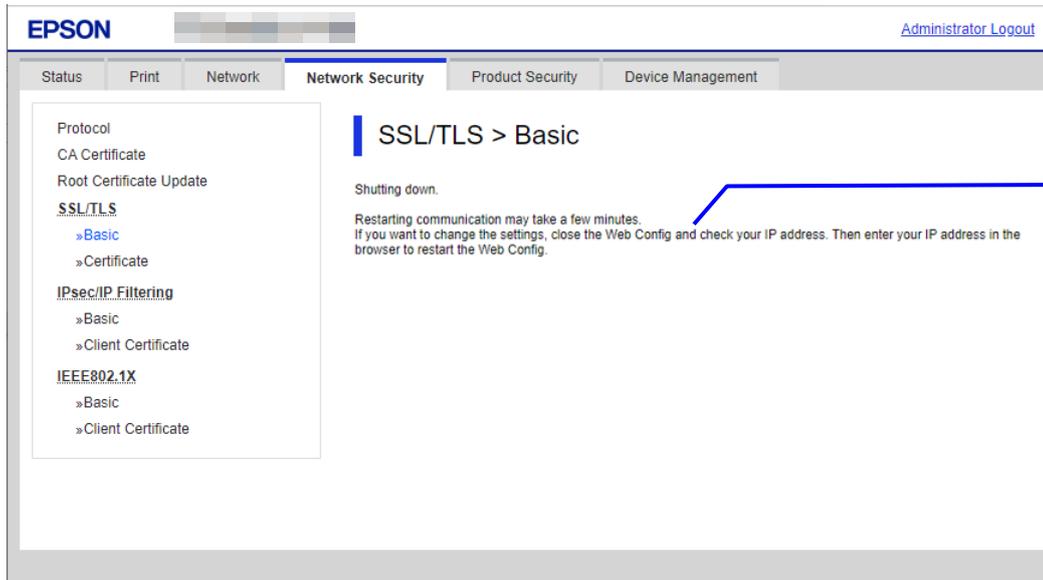


Figure 10-33 Result Page

10.4.4.1.3.2 Setting Result

Table 10-77 Setting Result

Items	Description
" Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	-This message is shown when the settings are completed. The network shuts down in order to update.
"Setup failed."	- This message is shown if the settings fail.

10.4.4.2 Certificate

10.4.4.2.1 Top Page

10.4.4.2.1.1 Image

The following figure shows the layout of the top page.

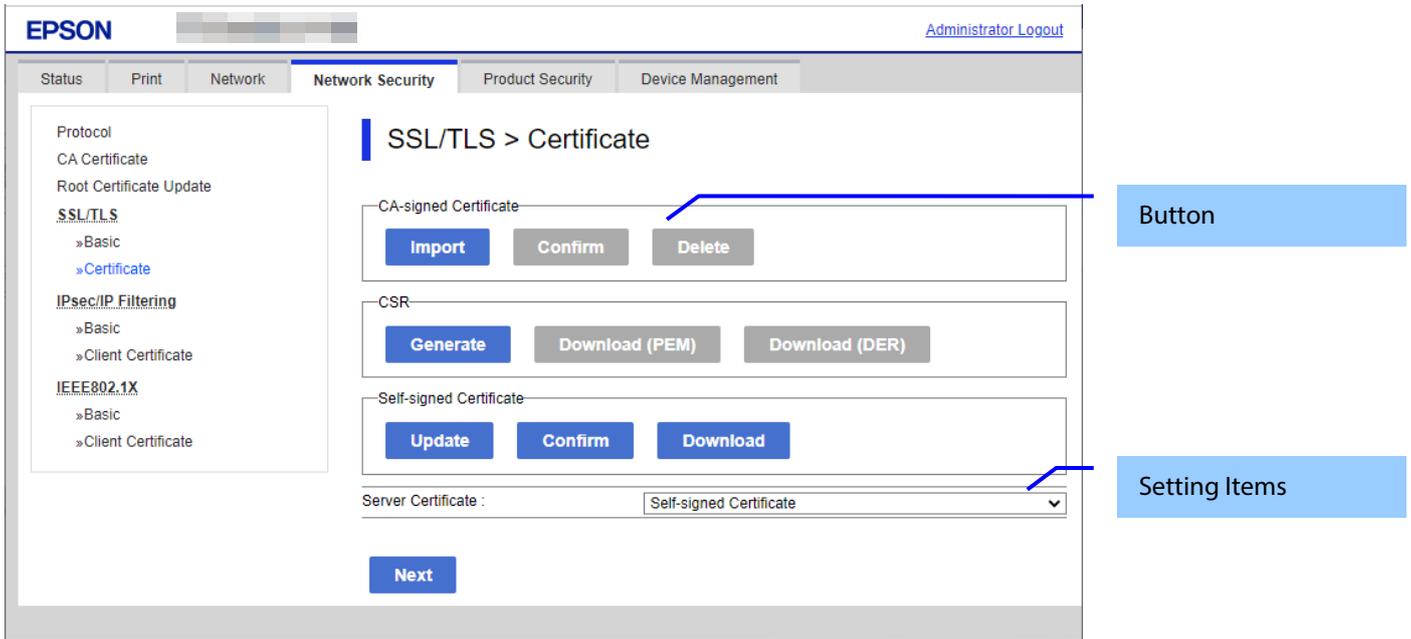


Figure 10-34 Top Page

10.4.4.2.1.2 Setting Items

You can choose the certificate used for the SSL/TLS connection.

Table 10-78 Setting Items

Items	Description
"Server Certificate"	Use the drop-down list to make a choice. "CA-signed Certificate" / "Self-signed Certificate" If a CA-signed certificate is not imported, a self-signed certificate is chosen automatically by the printer.

10.4.4.2.1.3 Button

The following table shows the button on the page.

Table 10-79 Button

Items (Group Name)	Items (Button Name)	Description	Condition
"Server Certificate"	"Next"	-Button for changing the server certificate for SST/TLS. For RED-compliant printers, a security warning pop-up will appear before transitioning to the confirm entry page.	-
"CA-signed Certificate"	"Import"	- Button for importing a CA-signed certificate.	-
	"Confirm"	- Button for confirming the imported CA-signed certificate.	CA-signed certificate imported
	"Delete"	- Button for deleting the imported CA-signed certificate.	Enabled if a CA-signed certificate is imported but not in use
"CSR"	"Generate"	- Button for moving to the settings page to generate CSR.	-
	"Download (PEM)"	- Button for downloading the CSR date	-CSR created.

		in PEM format.	
	"Download (DER)"	- Button for downloading the CSR date in PEM format.	-CSR created.
"Self-signed Certificate"	"Update"	- Button for moving to the settings page to update the self-signed certificate. If the date and time are not adjusted in the printer, the following message is shown in the main frame. "Invalid Date and Time."	-
	"Confirm"	- Button for moving to the confirmation page for the self-signed certificate.	-
	"Download"	- Button to download the self-signed certificate date in PEM format (extension:.cer). The default name of the downloaded file is in the form of "SelfSigned_<Date and Time>". <Date and Time> is the date and time set for the product.	This button is always shown. (Only this button is shown on the page when the administrator is logged off or a registered user is logged on.)

Table 10-80 Security warning pop-up

Items	Description
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	The pop-up is displayed for RED-compliant printers.

10.4.4.2.2 Confirming Page

The confirming page appears when the changing of the server certificate for SST/TLS is performed.

10.4.4.2.2.1 Setting Items

And the following message is shown on bottom of the confirming settings.

"Communication will be shut down temporarily to enable the new settings."

"You cannot access the network immediately after the settings are changed."

10.4.4.2.2.2 Button

The following table shows the button on the page.

Table 10-81 Button

Items	Description
"OK"	The button on bottom of the main frame to perform setting.
"Back"	The button on bottom of the main frame to go back to previous page.

10.4.4.2.3 Result Page

When the "OK" button is pressed, result page will be displayed.

10.4.4.2.3.1 Setting Result

Table 10-82 Setting Result

Items	Description
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	-This message is shown when the settings are completed. The network shuts down in order to update.
"Setup failed."	- This message is shown if the settings fail.

10.4.4.2.4 Importing for CA-signed Certificate

10.4.4.2.4.1 Import Top Page

This page is shown after the 'Import' button in the CA-signed certificate settings is pressed.

The following figure shows the layout of the page for importing the CA-signed certificate into the printer.

10.4.4.2.4.1.1 Image

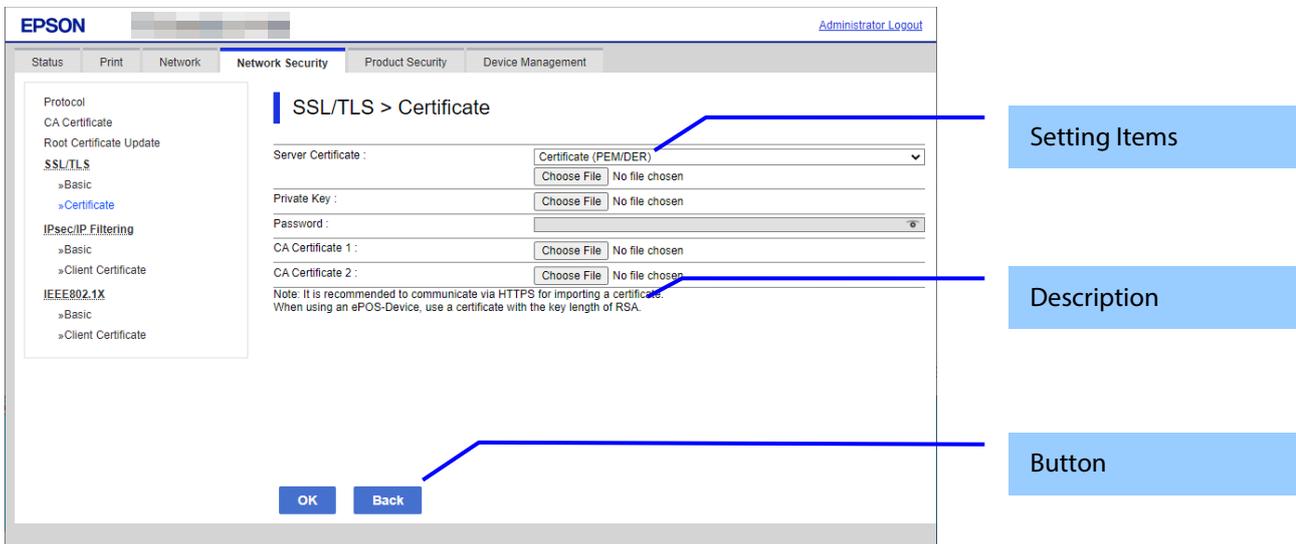


Figure 10-35 Import Top Page

10.4.4.2.4.1.2 Setting Items

On the Import Top Page, the following items can be controlled by the administrator.

Table 10-83 Setting Items

Items	Description	Condition
"Server Certificate"	-Enter the file of the server certificate to import it into the printer. You can also use the file button to select the file.	-
File Format	Choose the file format of the server certificate to import it into the printer. "Certificate (PEM/DER)"/ "Certificate with Private Key (PKCS#12)"	-
"Private Key"	-Enter the private key file of the server certificate to import it into the printer. You can also use the file button to select the file.	-Enabled if certificate (PEM/DER) selected
"Password"	-Enter the passphrase for encryption to create a private key. Usable string: ASCII code (0x20-0x7E) Max of 48 characters.	- Enabled if certificate with private key (PKCS#12) selected
"CA Certificate 1"	-Enter the file of the certificate signed by CA issuing the server certificate to import it into the printer. You can also use the file button to select the file.	- Enabled if certificate (PEM/DER) selected

"CA Certificate 2"	-Enter the file of the certificate signed by CA issuing the first CA certificate to import it into the printer. It also is able to select the file using file button.	- Enabled if certificate (PEM/DER) selected
--------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------

10.4.4.2.4.1.3 Description Items

Table 10-84 Description Items

Items	Description
"Note: It is recommended to communicate via HTTPS for importing a certificate."	Fixed Strings
"To use ePOS-Device, use a certificate with an RSA key length."	Fixed Strings

10.4.4.2.4.1.4 Button

The following table shows the buttons on the page.

Table 10-85 Button

Items	Description
"OK"	Button at the bottom of the main frame to perform importing. After the "OK" button is pressed, Web Config performs the following operations depending on conditions. - If the entered value is invalid, Web Config displays a pop-up window with an error message. - If the entered value is NOT invalid and a CA-signed Certificate was imported already, Web Config displays a pop-up window with a warning message. - If the entered value is NOT invalid and a CA-signed Certificate was NOT imported already, Web Config displays a Result page.
"Back"	- Button at the bottom of the main frame for going back to the top page of the certificate settings.

When the "OK" button is pressed, an error pop-up window is shown if the input value is invalid.

10.4.4.2.4.1.5 Confirmation message

Table 10-86 Error pop-up window

Items	Description
"Enter a Server Certificate."	This message is shown when the file of the server certificate is not selected.
"CA Certificate 1 is not entered."	When the file of the CA certificate1 is not selected but the CA certificate selected, this message is shown.
"Invalid value below."	-The items of the mis inputted value are shown.

10.4.4.2.4.1.6 Button

Wording of the OK button is displayed according to the display specifications of each Web browser.

Table 10-87 Button

Items	Description
"OK"	- The button to go back to the Import Top Page.

When the "OK" button is pressed, the error pop-up window is shown if the a Server Certificate was imported already.

10.4.4.2.4.1.7 Confirmation message

Table 10-88 Warning pop-up window

Items	Description
"The certificate will be overwritten." "Communication will be shut down temporarily."	The pop-up window is displayed to show a warning message if the input value is NOT invalid and a CA-signed Certificate was imported already.
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	This is displayed for RED-compliant printers.

10.4.4.2.4.1.8 Button

Wording of the OK button and the Cancel button is displayed according to the display specifications of each Web browser.

Table 10-89 Button

Items	Description
"OK"	Performs to overwrite all of the imported certificates. The button to go to the result page.
"Cancel"	The button to go back to the Import Top Page.

When the "OK" button is pressed, result page will be displayed.

10.4.4.2.4.2.1 Setting Result

Table 10-90 Setting Result

Items	Description	Transit from Import Top Page	Transit from Warning pop-up	Transit after pressing Reboot Network button
"Setup complete. "	This message is shown when the importing is completed.	Yes	No	No
"Setup complete. " "Restarting communication may take a few minutes. " "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config. "	This message is shown when importing overwrite is completed. The network shuts down for updating.	No	Yes	Yes
"Invalid password. "	This message is shown when inputted password is invalid.	Yes	Yes	No
"Invalid file. "	This message is shown when the below. -The file is used as mismatched format or wrong interrelation. -The file size is over 5k to 24k. (Reference the Note) -Mismatch the private key and the certificate. -Illegal chain.	Yes	Yes	No
"Invalid date and time. "	This message is shown when the expired certificate is used on the product which is not set the date and time.	Yes	Yes	No
"The certificate has expired. Check if the certificate is valid, or check the date and time on the product. "	This message is shown when the expired certificate is used on the product which is already set the date and time.	Yes	Yes	No
"Cannot use the Server Certificates that include more than three CA certificates. "	This message is shown when the server certificate which is included more than 3 CA-signed certs is imported in PSCS#12.	Yes	Yes	No
"Private key is required. "	This message is shown when the private key is set to the point.	Yes	Yes	No
"Setup failed. "	This message is shown when the importing is failed.	Yes	Yes	No
"Setup failed. " "Click [Reboot Network] to apply the settings. " "Communication will be shut down temporarily. " "The setting may be applied to the communication after other settings are changed or the device is restarted. "	This message is shown when the network reboot is failed.	No	Yes	Yes

Note: If the size of a certificate to be imported is larger than 24Kbytes, Web browser's error is shown because the device can't read it.

10.4.2.4.2.2 Button

Wording of the OK button and the Cancel button is displayed according to the display specifications of each Web browser.

Table 10-91 Button

Items	Description	Condition
"Reboot Network"	Performs to reboot network. The WebConfig displays success result page if the network reboot success. The WebConfig displays same result page if the network reboot failure.	If the network reboot failure

10.4.2.5 Confirm for CA-signed Certificate

This page is shown after 'Confirm' for the import is pressed in the CA-signed certificate settings. The following figure shows the layout of the page for confirming imported certificates.

10.4.2.5.1 Confirm Page

10.4.2.5.1.1 Image

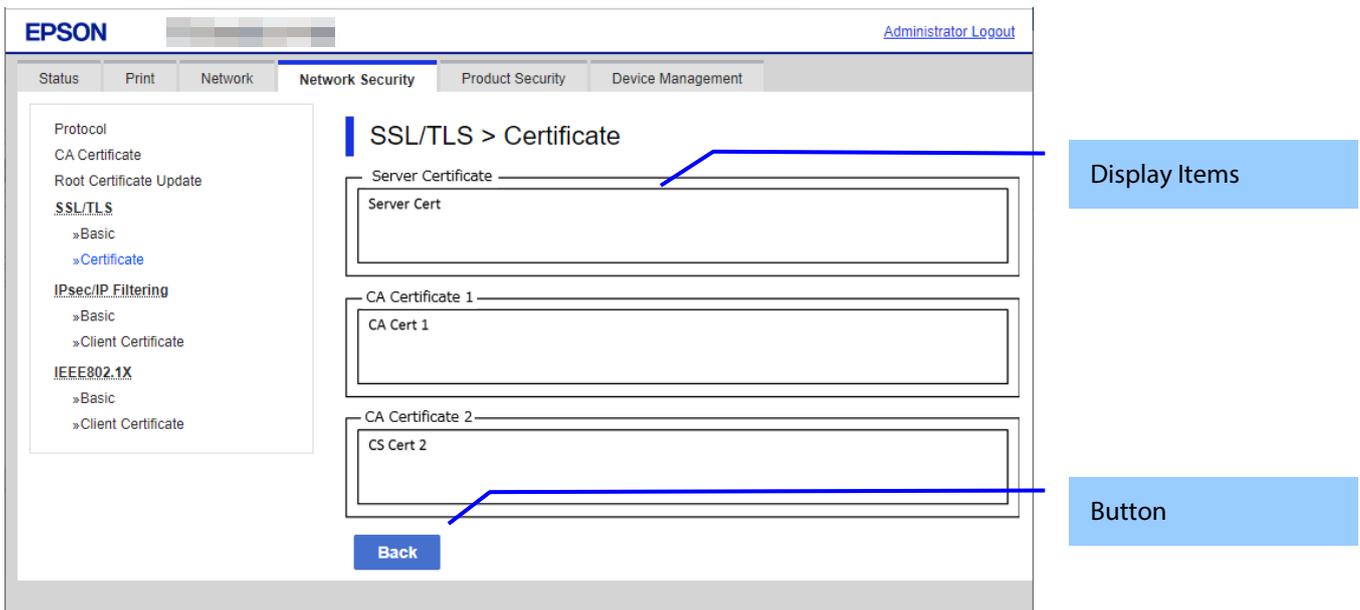


Figure 10-36 Confirm for CA-signed Certificate

10.4.2.5.1.2 Display Items

Table 10-92 Display Items

Items	Description
"Server Certificate"	Shows the content of the server certificate imported into the printer
"CA Certificate 1"	Shows the content of the first CA-signed certificate imported into the printer
"CA Certificate 2"	Shows the content of the second CA-signed certificate imported into the printer

10.4.2.5.1.3 Button

Table 10-93 Button

Items	Description
"Back"	- Button at the bottom of the main frame for going back to the top page of the certificate settings.

10.4.4.2.6 Delete for the CA-signed certificate

This page is shown after 'Confirm' for the import is pressed in the CA-signed certificate settings.

10.4.4.2.6.1 Warning pop-up Window

A pop-up window is shown when the import "Delete" button for the CA-signed certificate setting is pressed.

10.4.4.2.6.1.1 Confirmation message

Table 10-94 Pop-up window

Items	Description
"Certificate(s) will be deleted."	Static strings.
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	This is displayed for RED-compliant printers.

10.4.4.2.6.1.2 Button

Table 10-95 Button

Items	Description
"OK"	Deletes all of the imported certificates.
"Cancel"	The button to go back to the top page of the certificate settings.

10.4.4.2.6.2 Result Page

When the "OK" button is pressed, result page will be displayed.

10.4.4.2.6.2.1 Setting Result

Table 10-96 Setting Result

Items	Description
"Setup complete."	This message is shown when deletion of the certificate is successful.
"Setup failed."	This message is shown when deletion of the certificate fails.

10.4.4.2.7 Generate CSR(Certificate Signing Request)

10.4.4.2.7.1 Generate Top Page

This page is shown after 'Generate' for importing in the CSR settings is pressed. The following figure shows the layout of the page for generating CSR.

10.4.4.2.7.1.1 Image

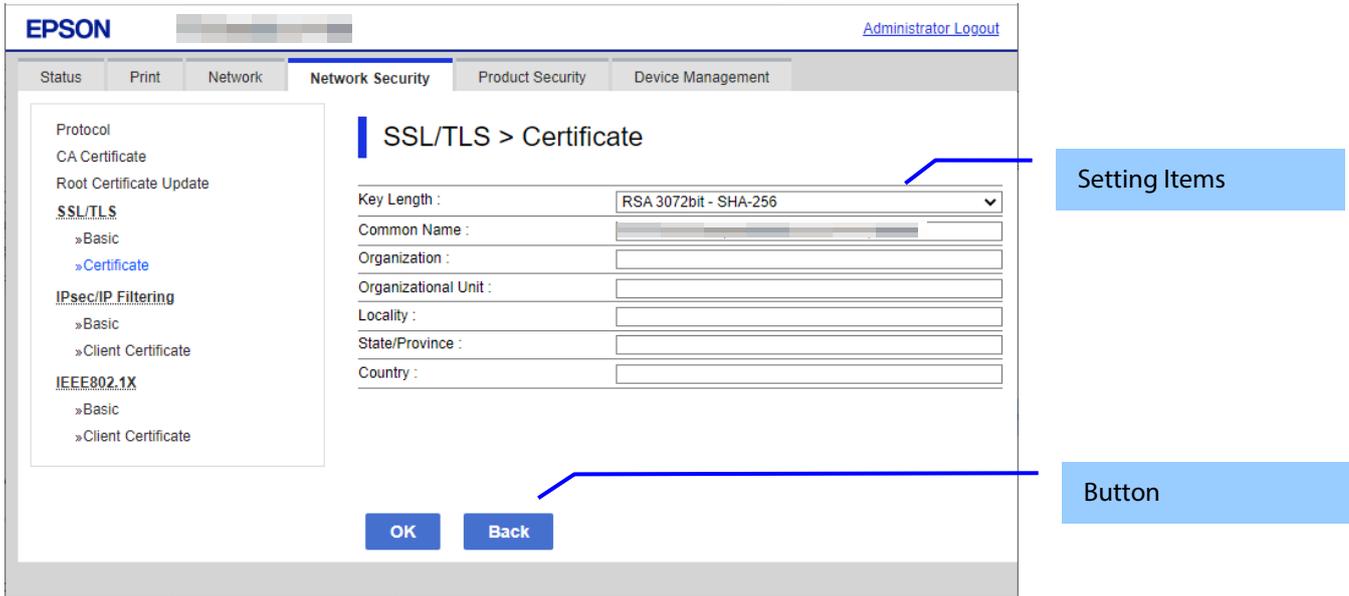


Figure 10-37 Generate CSR(Certificate Signing Request)

10.4.4.2.7.1.2 Setting Items

The user must enter the following information to generate CSR. The following table shows the items on the page.

Table 10-97 Setting Items

Items	Description
"Key Length"	Use the drop-down list to choose the public key size for generating CSR. "RSA 1024bit - SHA-1" / "RSA 2048bit - SHA-256" / "RSA 3072bit - SHA-256" / "EC 256bit - SHA-256" / "RSA 4096bit - SHA-384" / "EC 384bit - SHA-384" / "EC 521bit - SHA-512"
"Common Name"	Use the text box to input a common name for generating CSR. Entering information is mandatory for generating CSR. Set a string with from 1 to 128 characters in the IPv4 address, IPv6 address, host name, or FQDN format. Commas (",")(0x2c) have a special meaning as control characters. See the NOTE below.
"Organization"	Use the text box to input the organization for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"Organizational Unit"	Use the text box to input the organization unit for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"Locality"	Use the text box to input a locality for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"State/Province"	Use the text box to input a state or province for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"Country"	Use the text box to input a country for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 2 characters If there is no string, the value is treated as a white space.
"Sender's Email Address"	Specify the source address for sending e-mail. Enter an ASCII character string in the range of 0 to 255 characters in the text box. (Excluding: () <> [];¥ ";)

NOTE: You can enter multiple names for these items.

10.4.4.2.7.1.3 Button

Table 10-98 Button

Items	Description
"OK"	- Button for generating CSR at the bottom of the main frame
"Back"	-Button at the bottom of the main frame for going back to the top page of the certificate settings.

When the "Generate" button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-99 Error Pop-up Window

Items	Description
"Invalid value below. ¥n -%s¥n -%s¥n..."	Shows a warning when a value is entered incorrectly.

10.4.4.2.7.2 Result Page

After the OK button is pressed, Web Config shows the hourglass and then goes to the Result page. (Refer to Deleting a CA-signed certificate.)

10.4.4.2.7.2.1 Result Page

Table 10-100 Setting Result

Items	Description
"Setup Complete."	This message is shown when the settings are completed.
"Setup failed."	This message is shown if the settings fail.

10.4.4.2.8 Download CSR(Certificate Signing Request)

This page is shown after 'Download' for importing in the CSR settings is pressed.

The default name of the downloaded file is in the form of "EXPORT_CSR_<Serial Number>_<Date and Time>".

<Serial Number> is the Product's Serial Number.

<Date and Time> is the Date and Time set for the product.

The method of downloading the CSR varies by Web browser.

10.4.4.2.9 Updating self-signed Certificates

10.4.4.2.9.1 Update Top Page

This page is shown after 'Update' for the import is pressed in the self-signed certificate settings. The following figure shows the layout of the page for updating the self-signed certificate that is already embedded in the printer.

10.4.4.2.9.1.1 Image

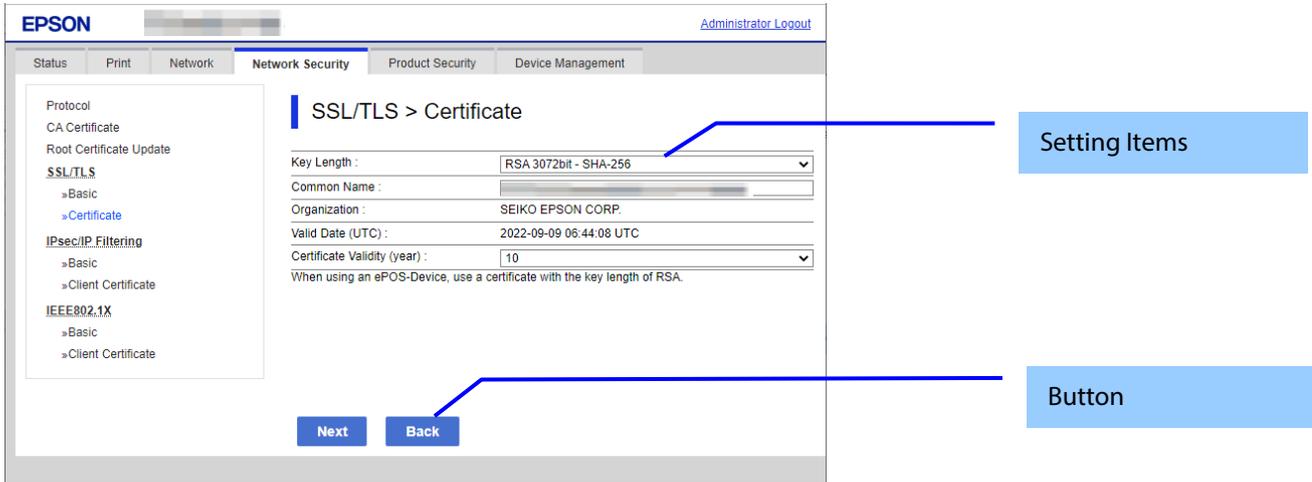


Figure 10-38 Updating self-signed Certificates

10.4.4.2.9.1.2 Setting Items

Table 10-101 Setting Items

Items	Description
"Key Length"	Use the drop-down list to choose the public key size for updating the self-signed certificate. "RSA 1024bit - SHA-1" / "RSA 2048bit - SHA-256" / "RSA 3072bit - SHA-256" / "EC 256bit - SHA-256" / "RSA 4096bit - SHA-384" / "EC 384bit - SHA-384" / "EC 521bit - SHA-512"
"Common Name"	Use the text box to input a common name for generating CSR. Entering information is mandatory for generating CSR. Set a string with from 1 to 128 characters in the IPv4 address, IPv6 address, host name, or FQDN format. Commas (",") (0x2c) have a special meaning as control characters. See the NOTE below.
"Organization"	"SEIKO EPSON CORP." -Fixed
"Valid Date (UTC)"	Shows the date and time for the client
"Certificate Validity (year)"	Use the drop-down list to select a year for the valid term of the self-signed certificate. "1" / "2" / "3" / "4" / "5" / "6" / "7" / "8" / "9" / "10" The units are years.
"To use ePOS-Device, use a Certificate which Key Length is RSA."	Fixed Strings

NOTE: You can enter multiple names.

10.4.4.2.9.1.3 Button

Table 10-102 Button

Items	Description
"Next"	Button at the bottom of the main frame for updating the self-signed certificate. For RED-compliant printers, a security warning pop-up will appear before transitioning to the next page.
"Back"	Button at the bottom of the main frame for going back to the top page of the certificate settings.

When the “Next” button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-103 Error Pop-up

Items	Description
"Invalid value below. ¥n -%s¥n -%s¥n..."	Shows the warning with the items of the mis inputted value.

Table 10-104 Security warning pop-up

Items	Description
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	The pop-up is displayed for RED-compliant printers.

10.4.4.2.9.2 Confirm Settings Page

The confirmation page appears when the self-signed certificate is changed.

10.4.4.2.9.2.1 Image

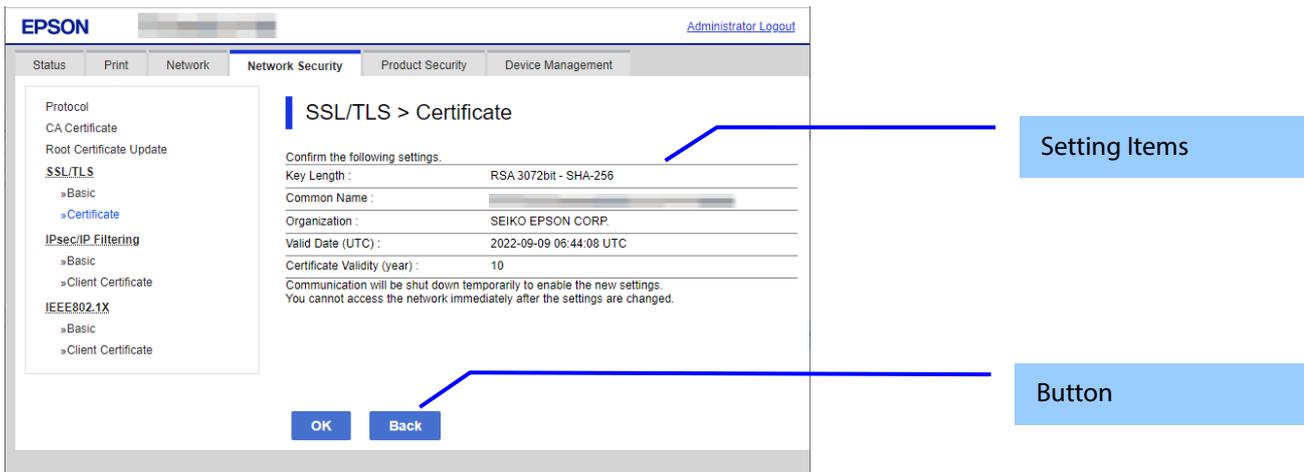


Figure 10-39 Confirm Settings Page

10.4.4.2.9.2.2 Setting Items

The settings entered on the previous page are shown for confirmation, after the message “Change the following settings”. The following message is shown below the confirmed settings.

“Communication will be shut down temporarily to enable the new settings.”

“ You will not be able to access the network immediately after the settings are changed.”

10.4.4.2.9.2.3 Button

Table 10-105 Button

Items	Description
"OK"	Button at the bottom of the main frame to perform settings.
"Back"	Button at the bottom of the main frame to go back to the previous page.

10.4.4.2.9.3 Result Page

The following result is shown in the main frame after the “OK” button is pressed.
(Refer to Deleting a CA-signed certificate)

10.4.4.2.9.3.1 Result Page

Table 10-106 Setting Result

Items	Description
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown when the settings are completed. The network shuts down in order to update.
"Date and Time are not set"	This message is shown when the printer's date and time are not set.
"Setup failed."	This message is shown if the settings fail.

10.4.4.2.10 Confirm for the Self-signed Certificate

This page is shown after 'Confirm' for the import is pressed in the self-signed certificate settings. The following figure shows the layout of the page for confirming certificates.

10.4.4.2.10.1 Confirm Top Page

10.4.4.2.10.1.1 Image

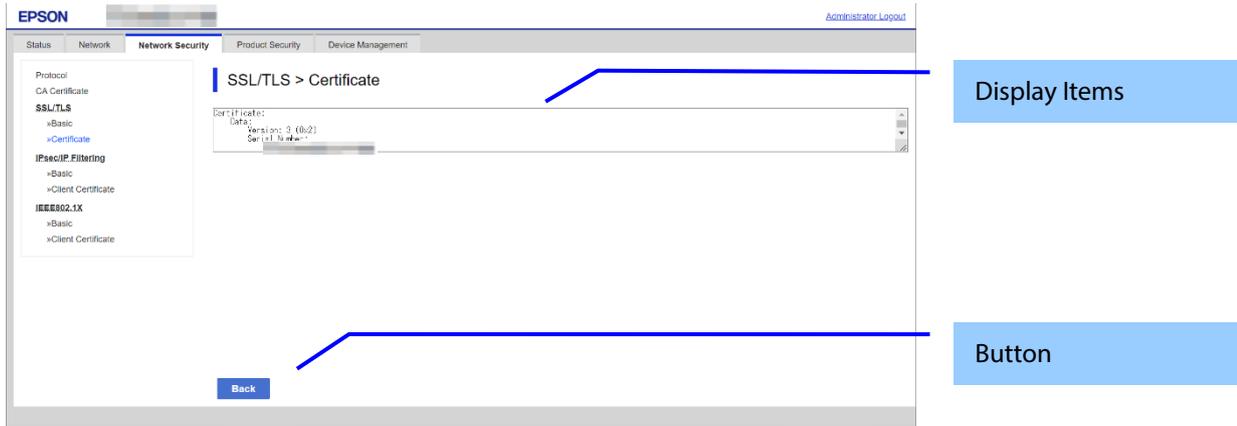


Figure 10-40 Confirming Self-signed Certificates

10.4.4.2.10.1.2 Display items

Table 10-107 Display Items

Items	Description
"Self-signed certificate"	Shows the content of the self-signed certificate. ASCII, Max. 8192 bytes

10.4.4.2.10.1.3 Button

Table 10-108 Button

Items	Description
"Back"	Button at the bottom of the main frame for going back to the top page of the certificate settings.

10.4.4.2.11 Downloading the Self-signed Certificate

The self-signed certificate is downloaded by pressing the "Download" button on the certificate settings page of SSL/TLS settings. The download file is in PEM format. (extension:.cer)
The default name of the downloaded file is in the form of "SelfSigned_<Date and Time>".
<Date and Time> is the date and time set for the product.

This dialogue box is displayed as a standard function of each Web browser and varies depending on the Web browser.

10.4.4.3 Automatic Certificate Update

10.4.4.3.1 Top Page

10.4.4.3.1.1 Image

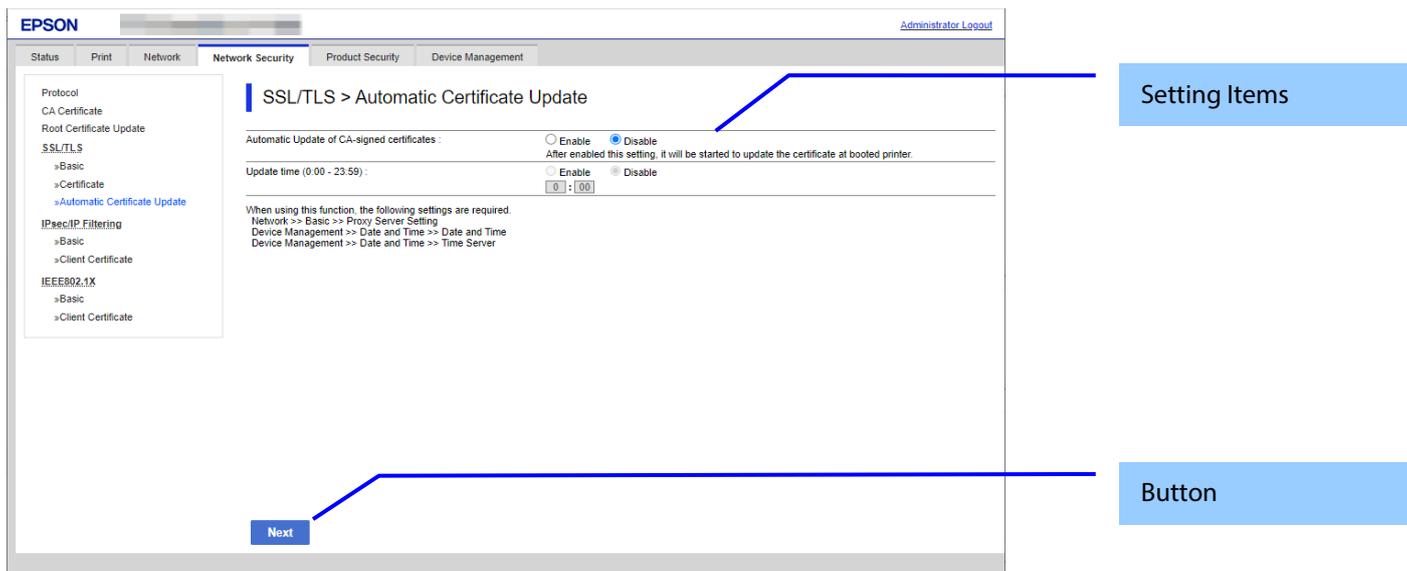


Figure 10-41 Top Page

10.4.4.3.1.2 Setting Items

Table 10-109 Setting Items

Items	Description	Condition
"Automatic Update of CA-signed certificates"	A radio button is provided to choose either of the following: "Enable" / "Disable"	-
"After enabled this setting, it will be started to update the certificate at booted printer."	Fixed strings	-
"Update time (0:00 – 23:59)"	A radio button is provided to choose either of the following: "Enable" / "Disable"	This item is not grayed-out when "Automatic Update of CA-signed certificates".
	A text box that is enabled when the above Update Time (radio button) is set to "Enable". This displays the hour text box, ":", and minute text box in that order. Characters that can be entered in each text box are "0" to "9" Only 24-hour clock can be entered.	This item is not grayed-out when "Update time (0:00 – 23:59)" is set to "Enable" and "Automatic Update of CA-signed certificates".

10.4.4.3.1.3 Comment

The following table shows a layout of comments.

Table 10-110 Comment

Items	Description
"When using this function, the following settings are required." "Network >> Basic >> Proxy Server Setting" "Device Management >> Date and Time >> Date and Time" "Device Management >> Date and Time >> Time Server"	Described at the bottom of the Top page.

10.4.4.3.1.4 Button

The following table shows the button on the page.

Table 10-111 Button

Items	Description
"Next"	This is a button on the bottom of the main frame to go to the confirmation page.

When the "Next" button is pressed, the WebConfig displays a pop-up window showing the following message if it recognizes an error in the input value.

Table 10-112 Error Pop-up Window

Items	Description
"Invalid value below."	This message is shown when the input value in the text box is invalid. The item names of the corrected values are shown under the message in the left cell. If there are two or more items whose values were corrected, those items are listed line by line.

10.4.4.3.2 Confirmation Page

10.4.4.3.2.1 Image

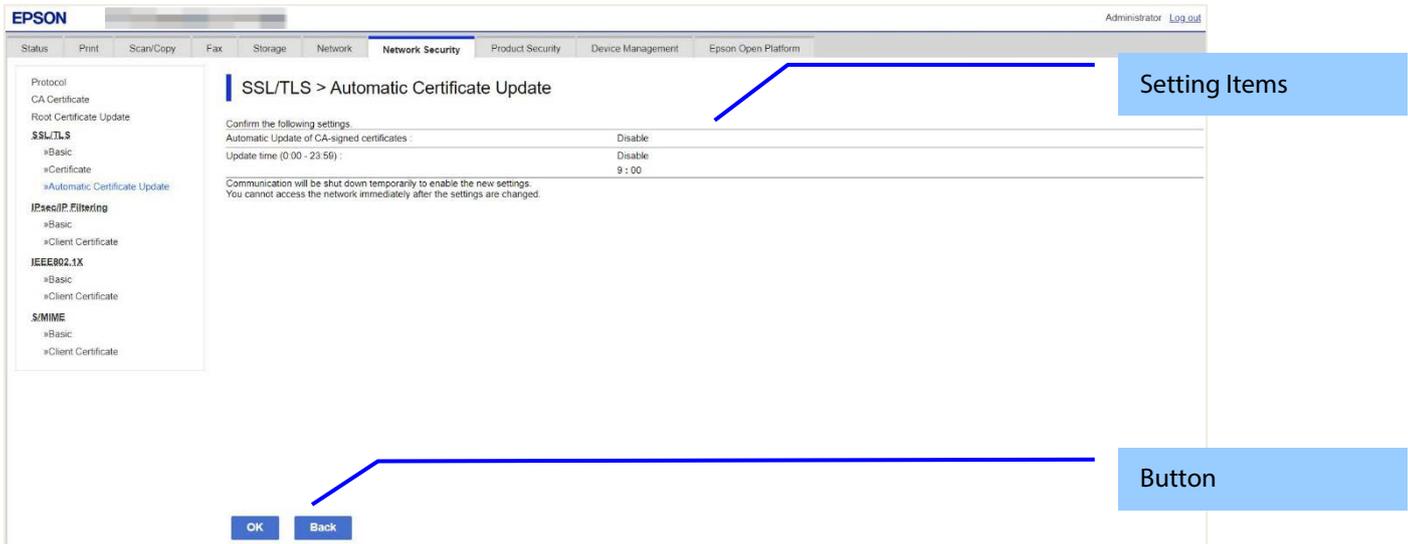


Figure 10-42 Confirmation Page

10.4.4.3.2.2 Setting Items

The settings input on the previous page are shown for confirming following "Change the following settings".

The following message is shown on the bottom of the settings to be confirmed.

"Communication will be shut down temporarily to enable the new settings.

You cannot access the network immediately after the settings are changed. "

10.4.4.3.2.3 Button

The following table shows the button(s) on the page.

Table 10-113 Button

Items	Description
"OK"	Button on bottom of the main frame to configure the settings.
"Back"	Button on bottom of the main frame to go back to previous page.

10.4.4.3.3 Result page

10.4.4.3.3.1 Image

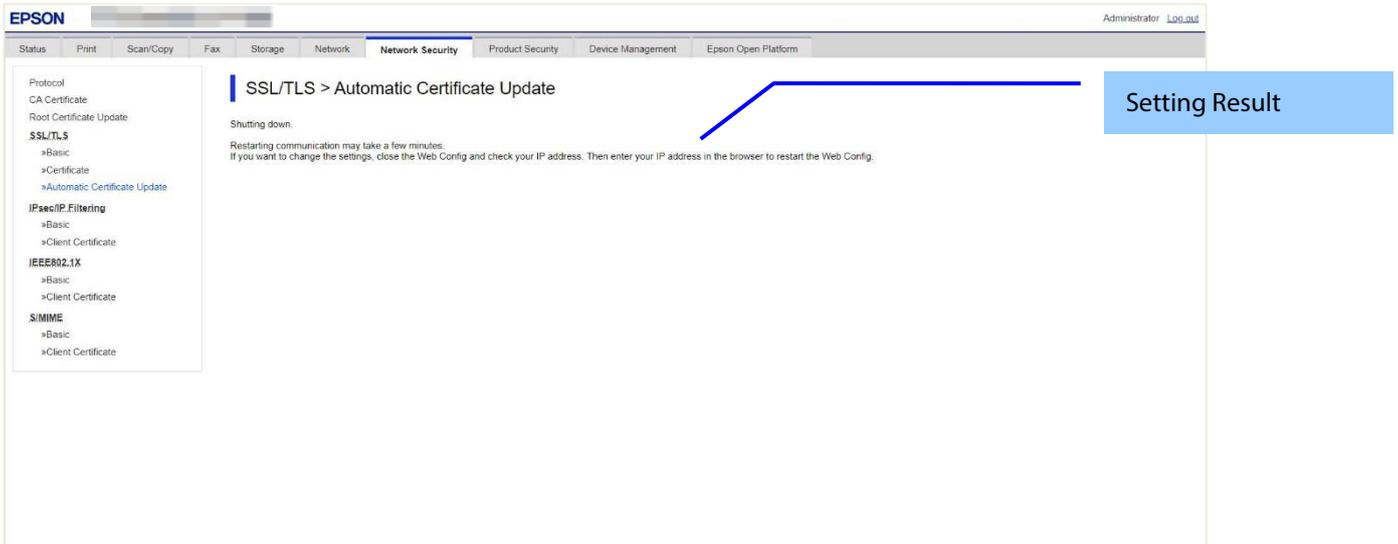


Figure 10-43 Result Page

10.4.4.3.3.2 Setting Result

Table 10-114 Setting Result

Items	Description
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown when the settings are completed. The network shuts down for updating.
"Setup failed."	This message is shown when configuration of the settings failed.

10.4.5 IPsec/IP Filtering

In the IPsec/IP Filtering settings area, you can configure the settings related to IPsec/IP Filtering.

Table 10-115 Sub menu of IPsec
Sub menu

Sub menu
"Basic"
"Client Certificate"

10.4.5.1 Basic

You can configure the default policy and group policies for IPsec/IP Filtering in the basic settings. This page consists of a default policy and group policies 1 ~ 10.

10.4.5.1.1 Top Page

10.4.5.1.1.1 Default Policy

10.4.5.1.1.1.1 Image

The following figure shows the layout for the Setting Items of Default Policy page.

The screenshot displays the EPSON Network Security configuration interface. The main content area is titled "IPsec/IP Filtering > Basic". It features a tabbed interface with "Default Policy" selected, and tabs for "1" through "10". The configuration includes a "Next" button at the bottom left. Two blue callout boxes with arrows point to the "Setting Items of Default Policy" and the "Next" button.

Figure 10-44 IPsec Default Policy

The following figure shows the layout of this settings area.

Table 10-116 Setting Items

Items	Description	Condition
"Each policy is applied with following priorities:" "Group Policy 1 > Group Policy 2 > ... > Group Policy 10 > Default Policy"	Description of the policy	-
"IPsec/IP Filtering"	Two radio buttons are provided to choose one of the following: "Enable" / "Disable"	-
"Default Policy"	Title	-
"Access Control"	Use the drop-down list to make a choice. "Permit Access" / "Refuse Access" / "IPsec"	If "IPsec/IP Filtering" is "Enabled", this item can be configured.
"IKE Version"	Use the radio buttons to choose "IKEv1" / "IKEv2".	If "IPsec/IP Filtering" is "Enabled" and "Access Control" is "IPsec", this item can be configured.
"Authentication Method"	Use the drop-down list to make a choice. "Pre-Shared Key" / "Certificate"	This item is displayed when "IKE Version" is "IKEv1". This item is enabled when "IPsec/IP Filtering" is "Enabled" and "Access Control" is "IPsec".
"Pre-Shared Key"	Enter the passphrase. Usable string: ASCII code (0x20-0x7E) Max of 127 characters.	This item is displayed when "IKE Version" is "IKEv1". This item is enabled when "IPsec/IP Filtering" is "Enabled" and "Access Control" is "IPsec".
"Confirm Pre-Shared Key"	Same as "Pre-Shared Key"	Same as "Pre-Shared Key".
"Local"	Title	This item is displayed when "IKE Version" is "IKEv2".
"Authentication Method"	Use the drop-down list to make a choice. "Pre-Shared Key" / "Certificate"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "IPsec/IP Filtering" is "Enabled" and "Access Control" is "IPsec".
"ID Type"	Use the drop-down list to make a choice. "Distinguished Name" / "IP Address" / "FQDN" / "Email Address" / "Key ID"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "IPsec/IP Filtering" is "Enabled", "Access Control" is "IPsec", and "Authentication Method" for "Local" is "Pre-Shared Key".]

"ID"	The values that can be entered depends on the selection for "ID Type". @[#][=] cannot be used as the first character, regardless of the type selected. "Distinguished Name": ASCII, 1-255 characters. Must use [=]. "IP Address": IPv4, IPv6 "FQDN": ASCII (alphanumeric, dot, hyphen), 1-255 characters "Email Address": ASCII, 1-255 characters. Must use [@]. [=] cannot be used. "Key ID": ASCII, 1-255 characters	This item is displayed when "IKE Version" is "IKEv2" and "ID Type" for "Local" is anything other than "IP Address". This item is enabled when "IPsec/IP Filtering" is "Enabled", "Access Control" is "IPsec", and "Authentication Method" for "Local" is "Pre-Shared Key".
"Pre-Shared Key"	Enter the passphrase. Usable string: ASCII code (0x20-0x7E) Max. 127 characters.	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "IPsec/IP Filtering" is "Enabled", "Access Control" is "IPsec", and "Authentication Method" for "Local" is "Pre-Shared Key".
"Confirm Pre-Shared Key"	Same as "Pre-Shared Key".	- Same as "Pre-Shared Key".
"Remote"	Title	This item is displayed when "IKE Version" is "IKEv2".
"Authentication Method"	Use the drop-down list to make a choice. "Pre-Shared Key" / "Certificate"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "IPsec/IP Filtering" is "Enabled" and "Access Control" is "IPsec".
"ID Type"	Use the drop-down list to make a choice. "Distinguished Name" / "IP Address" / "FQDN" / "Email Address" / "Key ID"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "IPsec/IP Filtering" is "Enabled", "Access Control" is "IPsec", and "Authentication Method" for "Remote" is "Pre-Shared Key".
"ID"	The values that can be entered depends on the selection for "ID Type". @[#][=] cannot be used as the first character, regardless of the type selected. "Distinguished Name": ASCII, 1-255 characters. Must use [=]. "IP Address": IPv4, IPv6 "FQDN": ASCII (alphanumeric, dot, hyphen), 1-255 characters "Email Address": ASCII, 1-255 characters. Must use [@] and [=] is not usable. "Key ID": ASCII, 1-255 characters	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec" and "Authentication Method" of "Remote" is "Pre-Shared Key".
"Pre-Shared Key"	Enter the passphrase. Usable string: ASCII code (0x20-0x7E) Max of 127 characters.	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec" and "Authentication Method" of "Remote" is "Pre-Shared Key".
"Confirm Pre-Shared Key"	Same as "Pre-Shared Key".	- Same as "Pre-Shared Key".
"Encapsulation"	Use the drop-down list to make a choice. "Transport Mode" / "Tunnel Mode"	If "IPsec/IP Filtering" is "Enable" and "Access Control" is "IPsec", it is possible to set this item.

"Remote Gateway(Tunnel Mode)"	Enter an IPv4 address or IPv6 address. Max of 39 characters.	If "IPsec/IP Filtering" is "Enable" , "Access Control" is "IPsec" and "Encapsulation" is "Tunnel Mode" ,it is possible to set this item.
"Security Protocol"	Use the drop-down list to make a choice. "ESP" / "AH"	If "IPsec/IP Filtering" is "Enable" and "Access Control" is "IPsec" , ,it is possible to set this item.
"Algorithm Settings"	Title strings. "IKE", "ESP", and "AH" are included.	-
"IKE"	Title strings. "Encryption", "Authentication" and "Key Exchange" are contained.	-
"Encryption"	Use the drop-down list to choose from the following. "AES-CBC-128" / "AES-CBC-192" / "AES-CBC-256" / "3DES" / "Any"	This item is displayed when "IKE Version" is "IKEv1". This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec".
"Encryption"	Use the drop-down list to choose from the following. "AES-CBC-128" / "AES-CBC-192" / "AES-CBC-256" / "AES-GCM-128" / "AES-GCM-192" / "AES-GCM-256" / "3DES" / "Any"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec".
"Authentication"	Use the drop-down list to choose from the following. "SHA-1" / "SHA-256" / "SHA-384" / "SHA-512" / "MD5" / "Any"	This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec".
"Key Exchange"	Use the drop-down list to choose from the following. "DH Group 1" / "DH Group 2" / "DH Group5" / "DH Group14" / "DH Group15" / "DH Group16" / "DH Group17" / "DH Group18" / "DH Group19" / "DH Group20" / "DH Group21" / "DH Group22" / "DH Group23" / "DH Group24" / "DH Group25" / "DH Group26" / "Any"	This item is displayed when "IKE Version" is "IKEv1". This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec".
"Key Exchange"	Use the drop-down list to choose from the following. "DH Group 1" / "DH Group 2" / "DH Group5" / "DH Group14" / "DH Group15" / "DH Group16" / "DH Group17" / "DH Group18" / "DH Group19" / "DH Group20" / "DH Group21" / "DH Group22" / "DH Group23" / "DH Group24" / "DH Group25" / "DH Group26" / "DH Group27" / "DH Group28" / "DH Group29" / "DH Group30" / "Any"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec".
"ESP"	Title strings. "Encryption" and "Authentication" are contained.	-
"Encryption"	Use the drop-down list to choose from the following. "AES-CBC-128" / "AES-CBC-192" / "AES-CBC-256" / "AES-GCM-128" / "AES-GCM-192" / "AES-GCM-256" / "3DES" / "Any"	This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec" and "Security Protocol" is "ESP".
"Authentication"	Use the drop-down list to choose from the following. "SHA-1" / "SHA-256" / "SHA-384" / "SHA-512" / "MD5" / "Any"	This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec" and "Security Protocol" is "ESP". This item is disabled when "Encryption" of "ESP" is "AES-GCM-128" or "AES-GCM-192" or "AES-GCM-256".

"AH"	Title strings. "Authentication" is contained.	-
"Authentication"	Use the drop-down list to choose from the following.. Support algorithms refer to the Network Functional Specifications. "SHA-1" / "SHA-256" / "SHA-384" / "SHA-512" / "MD5" / "Any"	This item is enabled when "IPsec/IP Filtering" is "Enable", "Access Control" is "IPsec" and "Security Protocol" is "AH".

10.4.5.1.1.1.3 Button

Table 10-117 Button

Items	Description
"Next"	If pressed, Web Config goes to the Confirm IPsec Settings page. For RED-compliant printers, a security warning pop-up will appear before transitioning to the next page.

If Web Config recognizes an error in the entered value after the Next button is pressed, the following error pop-up is shown.

Table 10-118 Error Pop-up

Items	Description
"Invalid value below."	This message is shown when the value entered in the text box is invalid. The item names of the corrected values are shown under the message in the left cell. If there are two or more items whose values were corrected, those items are listed line by line.
<The case of products with printing function > "The combination of Local Address (Printer) and Remote Address (Host) is incorrect." <The case of scanner> "The combination of Local Address (Scanner) and Remote Address (Host) is incorrect."	This message is displayed if the combination of the Local Address (Printer/Scanner) and Remote Address (Host) is incorrect. See the following table.
"Select 1 to 10 service names."	Displayed if there are 0 or 11 or more checks for "Service Name".
"Pre-shared keys you entered do not match."	Displayed if the values you entered for the Pre-shared keys do not match

Table 10-119 Security warning pop-up

Items	Description
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	The pop-up is displayed for RED-compliant printers.

-Permit Access or Refuse Access

Permit Access or Refuse Access		Local Address (Printer/Scanner)			
		IPv4	fe80::~~	Except fe80::~~	Any *
Remote Address (Host)	(Specify IP Address)IPv4	✓	-	-	✓
	(Specify IP Address) fe80::~~	-	✓	-	-
	(Specify IP Address)fe80::~~	-	-	✓	✓
	(Specify IP Address Range) IPv4	✓	-	-	✓
	(Specify IP Address Range) fe80::~~	-	✓	-	-
	(Specify IP Address Range) Except fe80::~~	-	-	✓	✓
	(Blank) Any	✓	-	✓	✓

IPsec

IPsec	Local Address (Printer/Scanner)
-------	---------------------------------

		IPv4	fe80::~	Except fe80::~	Any *
Remote Address (Host)	(Specify IP Address)IPv4	✓	-	-	✓
	(Specify IP Address) fe80::~	-	-	-	-
	(Specify IP Address)fe80::~	-	-	✓	✓
	(Specify IP Address Range) IPv4	-	-	-	-
	(Specify IP Address Range) fe80::~	-	-	-	-
	(Specify IP Address Range) Except fe80::~	-	-	-	-
	(Blank) Any	✓	-	✓	✓

✓: Cannot be set.

- : Cannot be set. The message “The combination of Local Address (Printer/Scanner) and Remote Address (Host) is incorrect.” is displayed.

*: Does not include IPv6 link-local address

10.4.5.1.1.2 Group Policy

10.4.5.1.1.2.1 Image

The following figure shows the layout of the Setting Items on the Group Policy page.

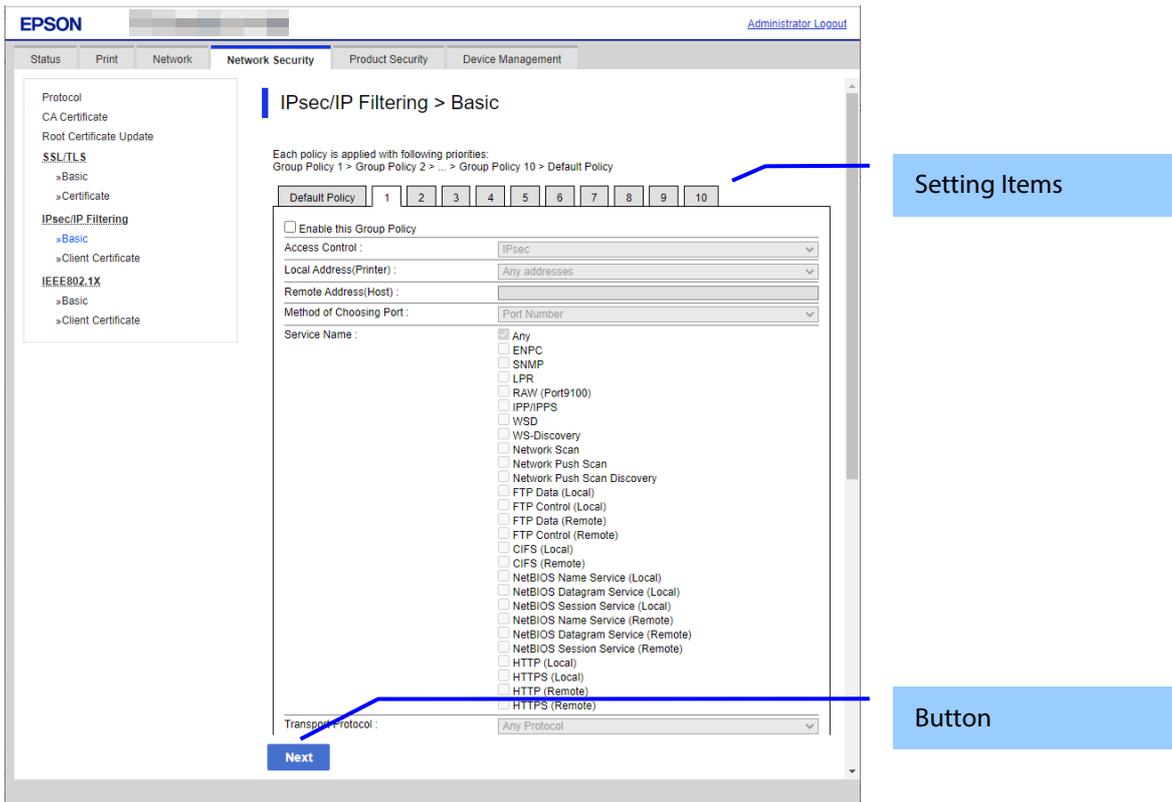


Figure 10-45 Group Policy of IPsec Basic Top Page

10.4.5.1.1.2.2 Setting Items of Group Policy

The following figure shows a layout of this settings area.

Table 10-120 Setting Items

Items	Description	Description
"Each policy is applied with following priorities:" "Group Policy 1 > Group Policy 2 > ... > Group Policy 10 > Default Policy"	Description of the policy.	-
"Enable this Group Policy"	Enabled if the check box is selected	-
"Access Control"	- Use the drop-down list to make a choice. "Permit Access" / "Refuse Access" / "IPsec"	- If "Enable this Group Policy" is enabled, this item can be configured.
<The case of products with printing function > "Local Address(Printer)" <The case of scanner > "Local Address (Scanner)"	-Use the drop-down list to make a choice. "Unavailable" / "Any addresses" / IPv4 Address / IPv6 Address / IPv6 Link-Local Address / IPv6 Stateful Address / IPv6 Stateless Address 1 / IPv6 Stateless Address 2 / IPv6 Stateless Address 3 IPv6Address, IPv6LinklocalAddress, IPv6StatelessAddress1, IPv6StatelessAddress2, and IPv6StatelessAddress3 are displayed when the address is set. "Unavailable" is displayed when the Local Address and IP Address for the printer are incorrect. "Unavailable" is not set. If the method for IP Address is auto, you can select "Use automatically acquired IPv4 address (xxx.xxx.xxx.xxx)".	- If "Enable this Group Policy" is enable, it is possible to set this item.
"Remote Address(Host)"	-Enter up to 43 characters. You can enter in the IPv4 and IPv6 formats You can enter the empty.	- If "Enable this Group Policy" is enabled, this item can be configured.

	It is possible to use the prefix. You can not enter 255.255.255.255 and 0.0.0.0.	
"Method of Choosing Port"	-Use the drop-down list to make a choice. "Service Name" / "Port Number"	- If "Enable this Group Policy" is enable, it is possible to set this item.
"Service Name"	From 1 to 10 of the following can be selected for "Service Name". However, if "Any" is selected, no other item can be selected. "Any" / "ENPC" / "SNMP" / "LPR" / "RAW (Port9100)" / "IPP/IPPS" / "WSD" / "WS-Discovery" / "NetBIOS Name Service (Remote)" / "NetBIOS Datagram Service (Remote)" / "NetBIOS Session Service (Remote)" / "HTTP (Local)" / "HTTPS (Local)" / "HTTP (Remote)" / "HTTPS (Remote)"	- If "Enable this Group Policy" is enabled and "Method of Choosing PORT" is "Service Name", it is possible to configure this item. If the printer has these features, they can be selected. -LPR function "LPR" - RAW (Port9100)function "RAW (Port9100)" - IPP function "IPP/IPPS" WSD Scan "WSD" / "WS-Discovery" - Push Scan Function "Network Push Scan" / "Network Push Scan Discovery" -ScanToFolder "FTP Data (Remote)" / "FTP Control (Remote)" / "NetBIOS Name Service (Remote)" / "NetBIOS Datagram Service (Remote)" / "NetBIOS Session Service (Remote)" /
"Transport Protocol"	-Use the drop-down list to make a choice. "Any Protocol" / "TCP" / "UDP" / "ICMPv4"	- If "Enable this Group Policy" is enable and "Method of Choosing Port" is "Port Number", it is possible to set this item.
"Local Port"	Enter up to 60 characters. Numbers, commas, spaces, and empty strings can be input. Enter up to 10 numbers, separated by commas. The range is 1-65535.	- If "Enable this Group Policy" is enabled, "Method of Choosing Port" is "Port Number", and "Transport Protocol" is "TCP" or "UDP", it is possible to configure this item.
"Remote Port"	Enter up to 60 characters. Numbers, commas, spaces, and empty strings can be input. Enter up to 10 numbers, separated by commas. The range is 1-65535.	- If "Enable this Group Policy" is enable, "Method of Choosing Port" is "Port Number" and "Transport Protocol" is "TCP" or "UDP", it is possible to set this item.
"IKE Version"	Use the radio buttons to choose "IKEv1" / "IKEv2"..	- If "Enable this Group Policy" is enabled and "Access Control" is "IPsec", it is possible to configure this item.
"Authentication Method"	-Use the drop-down list to make a choice. "Pre-Shared Key" / "Certificate"	This item is displayed when "IKE Version" is "IKEv1". This item is enabled when "Enable this Group Policy" is enable and "Access Control" is "IPsec".
"Pre-Shared Key"	- Enter the passphrase. Usable string: ASCII code (0x20-0x7E)	This item is displayed when "IKE Version" is "IKEv2".

	Max of 127 characters.	This item is enabled when "Enable this Group Policy" is enable, "Access Control" is "IPsec" and "Authentication Method" of "Local" is "Pre-Shared Key".
"Confirm Pre-Shared Key"	- Same as "Pre-Shared Key".	- Same as "Pre-Shared Key".
"Local"	Title	This item is displayed when "IKE Version" is "IKEv2".
"Authentication Method"	-Use the drop-down list to make a choice. "Pre-Shared Key" / "Certificate"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "Enable this Group Policy" is enable and "Access Control" is "IPsec".
"ID Type"	Use the drop-down list to make a choice. "Distinguished Name" / "IP Address" / "FQDN" / "Email Address" / "Key ID"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "Enable this Group Policy" is enable, "Access Control" is "IPsec" and "Authentication Method" of "Local" is "Pre-Shared Key".
"ID"	The values that can be entered depends on the selection for "ID Type". [@[#][=] cannot be used as the first character, regardless of the type selected. "Distinguished Name": ASCII, 1-255 characters. Must use [=]. "IP Address": IPv4, IPv6 "FQDN": ASCII(alphanumeric, dot, hyphen), 1-255 characters "Email Address": ASCII, 1-255 characters. Must use [@] and [=] is not usable. "Key ID": ASCII, 1-255 characters	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "Enable this Group Policy" is enable, "Access Control" is "IPsec" and "Authentication Method" of "Remote" is "Pre-Shared Key".
"Pre-Shared Key"	-Enter the passphrase. Usable string: ASCII code (0x20-0x7E) Max of 127 characters.	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "Enable this Group Policy" is enable, "Access Control" is "IPsec" and "Authentication Method" of "Remote" is "Pre-Shared Key".
"Confirm Pre-Shared Key"	- Same as "Pre-Shared Key".	- Same as "Pre-Shared Key".
"Remote"	Title	This item is displayed when "IKE Version" is "IKEv2".
"Authentication Method"	-Use the drop-down list to make a choice. "Pre-Shared Key" / "Certificate"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "Enable this Group Policy" is enable and "Access Control" is "IPsec".
"ID Type"	Use the drop-down list to make a choice. "Distinguished Name" / "IP Address" / "FQDN" / "Email Address" / "Key ID"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "Enable this Group Policy" is enable, "Access Control" is "IPsec", and "Authentication Method" for "Remote" is "Pre-Shared Key".
"ID"	The values that can be entered depends on the selection for "ID Type". [@[#][=] cannot be used as the first character, regardless of the type selected.	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when

	"Distinguished Name":ASCII, 1-255 characters. Must use [=]. "IP Address":IPv4, IPv6 "FQDN": ASCII(alphanumeric, dot, hyphen), 1-255 characters "Email Address": ASCII, 1-255 characters. Must use [@] and [=] is not usable. "Key ID": ASCII, 1-255 characters	"Enable this Group Policy" is enable, "Access Control" is "IPsec" and "Authentication Method" of "Remote" is "Pre-Shared Key".
"Pre-Shared Key"	-Enter the passphrase. Usable string: ASCII code (0x20-0x7E) Max of 127 characters.	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "Enable this Group Policy" is enable, "Access Control" is "IPsec" and "Authentication Method" of "Remote" is "Pre-Shared Key".
"Confirm Pre-Shared Key"	- Same as "Pre-Shared Key".	- Same as "Pre-Shared Key".
"Encapsulation"	-Use the drop-down list to make a choice. "Transport Mode" / "Tunnel Mode"	- If "Enable this Group Policy" is enabled and "Access Control" is "IPsec", it is possible to configure this item.
"Remote Gateway(Tunnel Mode)"	-It is possible to enter up to 39 characters. You can enter in the IPv4 and IPv6 formats You can enter the empty. You can not enter 255.255.255.255 and 0.0.0.0.	- If "Enable this Group Policy" is enable, "Access Control" is "IPsec" and "Encapsulation" is "Tunnel Mode" ,it is possible to set this item.
"Security Protocol"	-Use the drop-down list to make a choice. "ESP" / "AH"	- If "Enable this Group Policy" is enabled and "Access Control" is "IPsec", it is possible to configure this item.
"Algorithm Settings"	Title strings. "IKE", "ESP" and "AH" are contained.	-
"IKE"	Title strings. "Encryption", "Authentication" and "Key Exchange" are contained.	-
"Encryption"	Use the drop-down list to choose from the following. "AES-CBC-128" / "AES-CBC-192" / "AES-CBC-256" / "3DES" / "Any"	This item is displayed when "IKE Version" is "IKEv1". This item is enabled when "Enable this Group Policy" is enabled and "Access Control" is "IPsec"..
"Encryption"	Use the drop-down list to choose from the following. "AES-CBC-128" / "AES-CBC-192" / "AES-CBC-256" / "AES-GCM-128" / "AES-GCM-192" / "AES-GCM-256" / "3DES" / "Any"	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "Enable this Group Policy" is enable, "Access Control" is "IPsec".
"Authentication"	Use the drop-down list to choose from the following. "SHA-1" / "SHA-256" / "SHA-384" / "SHA-512" / "MD5" / "Any"	This item is enabled when "Enable this Group Policy" is enabled and "Access Control" is "IPsec".
"Key Exchange"	Use the drop-down list to choose from the following. "DH Group 1" / "DH Group 2" / "DH Group5" / "DH Group14" / "DH Group15" / "DH Group16" / "DH Group17" / "DH Group18" / "DH Group19" / "DH Group20" / "DH Group21" / "DH Group22" / "DH Group23" / "DH Group24" / "DH Group25" / "DH Group26" / "Any"	This item is displayed when "IKE Version" is "IKEv1". This item is enabled when "Enable this Group Policy" is enable, "Access Control" is "IPsec".
"Key Exchange"	Use the drop-down list to choose from the following. "DH Group 1" / "DH Group 2" / "DH Group5" / "DH Group14" / "DH Group15" / "DH Group16" / "DH Group17" / "DH Group18" / "DH Group19" / "DH Group20" / "DH Group21" / "DH Group22" / "DH Group23" / "DH Group24" /	This item is displayed when "IKE Version" is "IKEv2". This item is enabled when "Enable this Group Policy" is enable, "Access Control" is

	"DH Group25" / "DH Group26" / "DH Group27" / "DH Group28" / "DH Group29" / "DH Group30" / "Any"	"IPsec".
"ESP"	Title strings. "Encryption" and "Authentication" are contained.	-
"Encryption"	Use the drop-down list to choose from the following. "AES-CBC-128" / "AES-CBC-192" / "AES-CBC-256" / "AES-GCM-128" / "AES-GCM-192" / "AES-GCM-256" / "3DES" / "Any"	This item is enabled when "Enable this Group Policy" is enabled, "Access Control" is "IPsec", and "Security Protocol" is "ESP".
"Authentication"	Use the drop-down list to choose from the following. "SHA-1" / "SHA-256" / "SHA-384" / "SHA-512" / "MD5" / "Any"	This item is enabled when "Enable this Group Policy" is enabled, "Access Control" is "IPsec", and "Security Protocol" is "ESP". This item is disabled when "Encryption" for "ESP" is "AES-GCM-128", "AES-GCM-192", or "AES-GCM-256".
"AH"	Title strings. "Authentication" is contained.	-
"Authentication"	Use the drop-down list to choose from the following.. Support algorithms refer to the Network Functional Specifications. "SHA-1" / "SHA-256" / "SHA-384" / "SHA-512" / "MD5" / "Any"	This item is enabled when "Enable this Group Policy" is enabled, "Access Control" is "IPsec", and "Security Protocol" is "ESP".

10.4.5.1.1.2.3 Button

Table 10-121 Button

Items	Description
"Next"	If pressed, Web Config goes to the Confirm IPsec Settings page. For RED-compliant printers, a security warning pop-up will appear before transitioning to the next page.

If Web Config recognizes an error in the entered value after the Next button is pressed, the following error pop-up is shown.

Table 10-122 Error Pop-up

Items	Description
"Invalid value below."	This message is shown when the value entered in the text box is invalid. The item names of the corrected values are shown under the message in the left cell. If there are two or more items whose values were corrected, those items are listed line by line.
<The case of products with printing function > "The combination of Local Address (Printer) and Remote Address (Host) is incorrect." <The case of scanner> "The combination of Local Address (Scanner) and Remote Address (Host) is incorrect."	- This message is displayed if the combination of the Local Address (Printer/Scanner) and Remote Address (Host) is incorrect. See the following table.
"Select 1 to 10 service names."	- Displayed if there are 0 or 11 or more checks for "Service Name".
"Pre-shared keys you entered do not match."	- Displayed if the values you entered for the Pre-shared keys do not match

Table 10-123 Security warning pop-up

Items	Description
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	The pop-up is displayed for RED-compliant printers.

-Permit Access or Refuse Access

Permit Access or Refuse Access		Local Address (Printer/Scanner)			
		IPv4	fe80::~	Except fe80::~	Any *
Remote Address (Host)	(Specify IP Address)IPv4	✓	-	-	✓
	(Specify IP Address) fe80::~	-	✓	-	-
	(Specify IP Address)fe80::~	-	-	✓	✓
	(Specify IP Address Range) IPv4	✓	-	-	✓
	(Specify IP Address Range) fe80::~	-	✓	-	-
	(Specify IP Address Range) Except fe80::~	-	-	✓	✓
	(Blank) Any	✓	-	✓	✓

IPsec

IPsec		Local Address (Printer/Scanner)			
		IPv4	fe80::~	Except fe80::~	Any *
Remote Address (Host)	(Specify IP Address)IPv4	✓	-	-	✓
	(Specify IP Address) fe80::~	-	-	-	-
	(Specify IP Address)fe80::~	-	-	✓	✓
	(Specify IP Address Range) IPv4	-	-	-	-
	(Specify IP Address Range) fe80::~	-	-	-	-
	(Specify IP Address Range) Except fe80::~	-	-	-	-
	(Blank) Any	✓	-	✓	✓

✓: This setting can be configured.

-: Cannot be configured. The message "The combination of Local Address (Printer/Scanner) and Remote Address (Host) is incorrect." is displayed.

*: Does not include IPv6 link-local address

10.4.5.1.2 Confirm IPsec Settings Page

If the Next button is pressed on the IPsec Group Settings page, Web Config goes to the Confirm IPsec Group Policy Settings page.

10.4.5.1.2.1 Image

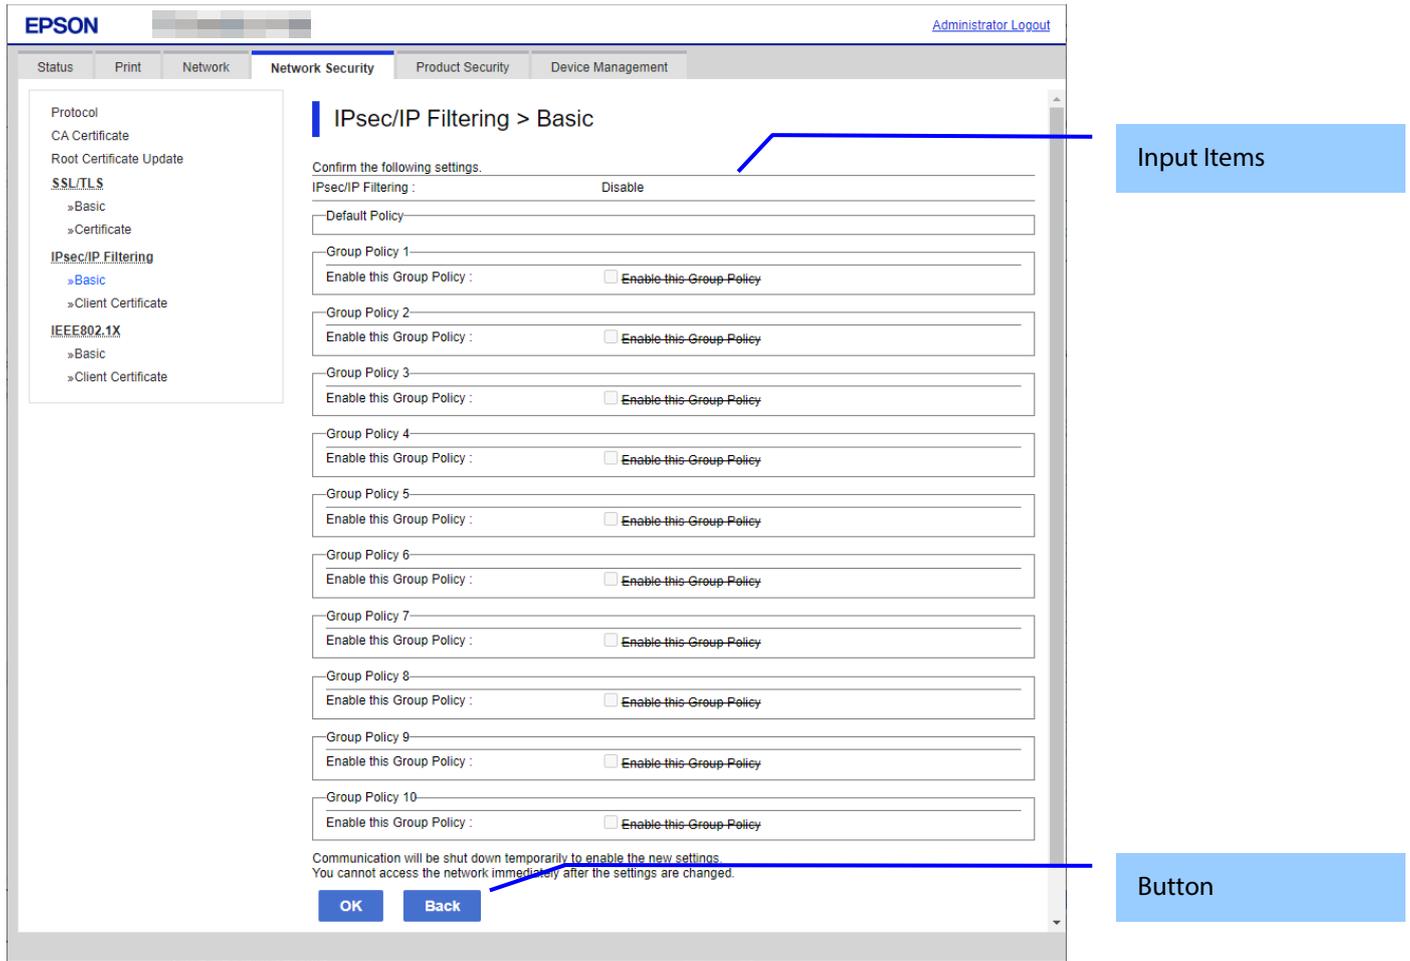


Figure 10-46 Confirm IPsecDefault Policy Settings Page

10.4.5.1.2.2 Input Information

Table 10-124 Input Information

Items	Description
"Confirm the following settings."	If the Next button is pressed on the IPsec Group Settings page, Web Config goes to the Confirm IPsec Group Policy Settings page.
"Default Policy"	If the Next button is pressed on the IPsec Group Settings page, Web Config goes to the Confirm IPsec Group Policy Settings page.
"Group Policy 1"/ "Group Policy 2"/ "Group Policy 3"/ "Group Policy 4"/ "Group Policy 5"/ "Group Policy 6"/ "Group Policy 7"/ "Group Policy 8"/ "Group Policy 9"/ "Group Policy 10"	If the Next button is pressed on the IPsec Group Settings page, Web Config goes to the Confirm IPsec Group Policy Settings page.
"Communication will be shut down temporarily to enable the new settings." "You cannot access the network immediately after the settings are changed." "Depending on the changes, you may not be able to connect to Web Config."	If the Next button is pressed on the IPsec Group Settings page, Web Config goes to the Confirm IPsec Group Policy Settings page.

<p><The case of product without LCD panel> "If connection is lost unintentionally, initialize the network settings on the product's control panel. And then configure it again." < The case of scanner with LCD panel > "If connection is lost unintentionally, disable IPsec/IP Filtering on the product's control panel. And then configure it again."</p>	<p>This message is shown on the bottom of the page.</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------

10.4.5.1.2.3 Button

There is a button to proceed to the remaining settings based on the values entered on this page, and a button to go back to the previous page.

Table 10-125 Button

Items	Description
"OK"	This button is used to apply the entered values to the system shown on the Confirm IEEE802.1X Settings page. If pressed, Web Config goes to the Result page.
"Back"	This button is used to go back to the IPsec Default Policy Settings page.

10.4.5.1.2.4 Result Page

The following figure shows the page that is displayed after the network settings are processed. The content of the Result page will vary based on the result (success or failure).

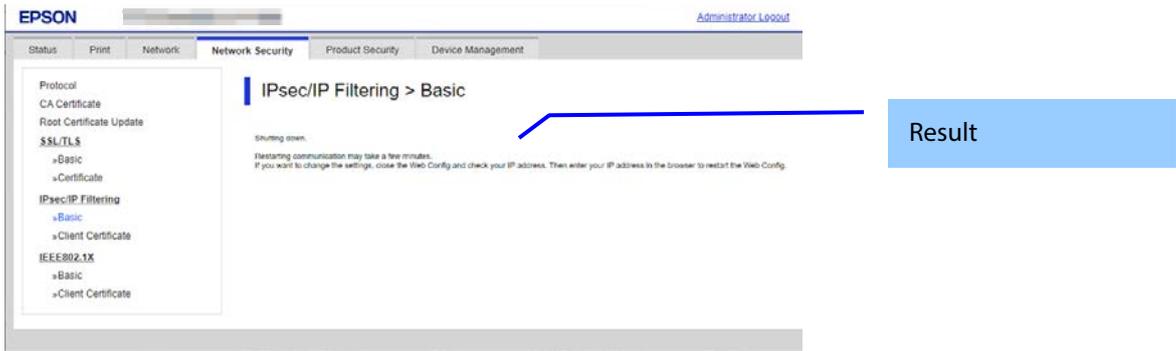


Figure 10-47 Success Page

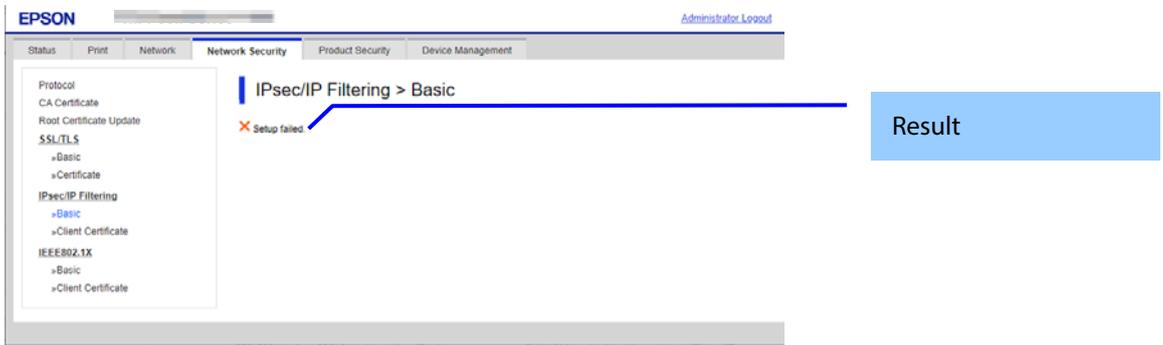


Figure 10-48 Failed Page

10.4.5.1.2.5 Setting Result

Table 10-126 Setting Result

Items	Description
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	-This message is shown when the settings are completed. The network shuts down in order to update.
"Setup failed."	- This message is shown if the settings fail..

10.4.5.2 Client Certificate

10.4.5.2.1 Top Page

10.4.5.2.1.1 Image

The following figure shows the layout of the top page.

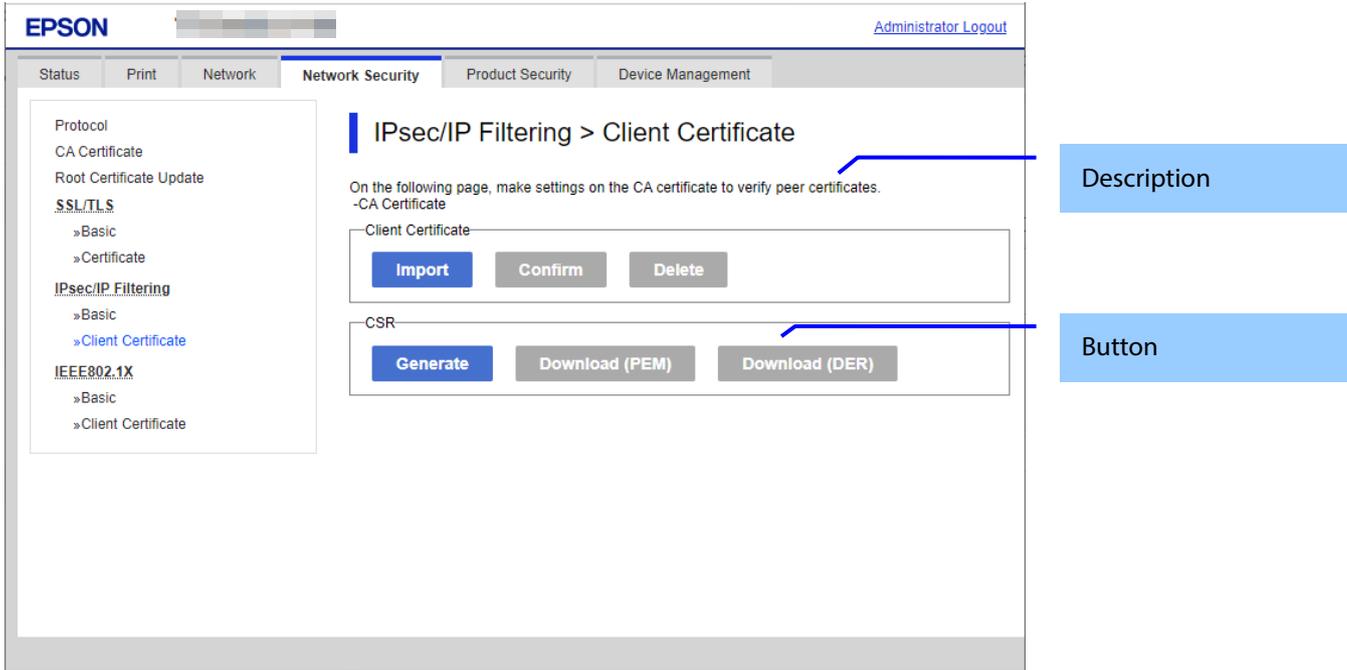


Figure 10-49 Top Page

10.4.5.2.1.2 Description

Table 10-127 Description

Items	Description
"On the following page, configure the settings on the CA certificate to verify peer certificates." "-CA Certificate"	Fixed Strings

10.4.5.2.1.3 Copy list

You can choose other functions to copy the certificate to this function.

Table 10-128 Copy list

Items	Description	Condition
"Copy From"	Use the drop-down list to make a choice. "Certificate for SSL/TLS" / "Certificate for IEEE802.1X" "Certificate for SSL/TLS" is displayed when the Client Certificate is imported on the SSL/TLS page. "Certificate for IEEE802.1X" is displayed when the Client Certificate is imported on the IEEE802.1X page. "Certificate for S/MIME" is displayed when the Client Certificate is imported on the S/MIME page. "Certificate for S/MIME" is displayed when the Client Certificate is imported on the S/MIME page.	"Copy From" is displayed when the Client Certificate is imported on the following page: <ul style="list-style-type: none"> · SSL/TLS page · IEEE802.1X page · S/MIME page

10.4.5.2.1.4 Button

The following table shows the buttons on the page.

Table 10-129 Button

Items (Group Name)	Items (Button Name)	Description	Condition
"Client Certificate"	"Import"	- Button for importing Client certificate	-
	"Confirm"	- Button for confirming the imported Client certificate	-Client certificate imported
	"Delete"	- Button for deleting the imported Client certificate	-Client certificate imported
	"Copy"	- Button for copying client certificates from other functions If the client certificate has already been imported with this feature, or if the printer is a RED-compliant printer, a warning pop-up will appear.	The "Copy" button is displayed when the Client Certificate is imported on the following page: · SSL/TLS page · IEEE802.1X page
"CSR"	"Generate"	- Button for moving to the settings page to generate CSR	-
	"Download (PEM)"	- Button for downloading the CSR date in PEM format	-CSR created.
	"Download (DER)"	- Button for downloading the CSR date in PEM format	-CSR created.

Table 10-130 Warning pop-up Window

Items	Description
"The certificate will be overwritten." "Communication will be shut down temporarily."	The pop-up window is displayed to show a warning message if the input value is NOT invalid and a Client Certificate was imported already.
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	The pop-up is displayed for RED-compliant printers.

10.4.5.2.2 Result Page

10.4.5.2.2.1 Image

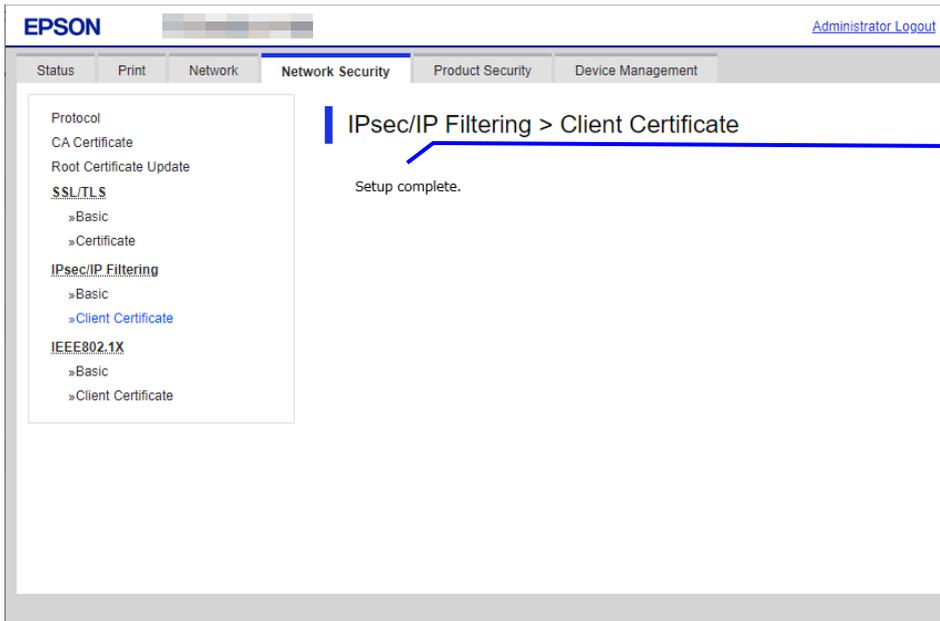


Figure 10-50 Result Page

10.4.5.2.2.2 Setting Results

The following result is shown in the main frame after the “Copy” button is pressed.

Table 10-131 Result Page

Items	Description
"Setup complete."	- This message is shown when importing without overwriting is completed.
"Setup failed."	- This message is shown if the settings fail.

10.4.5.2.3 Importing for Client Certificate

10.4.5.2.3.1 Import Top Page

This page is shown after the 'Import' button in the Client certificate settings is pressed. The following figure shows the layout of the page for importing the Client certificate into the printer.

10.4.5.2.3.1.1 Image

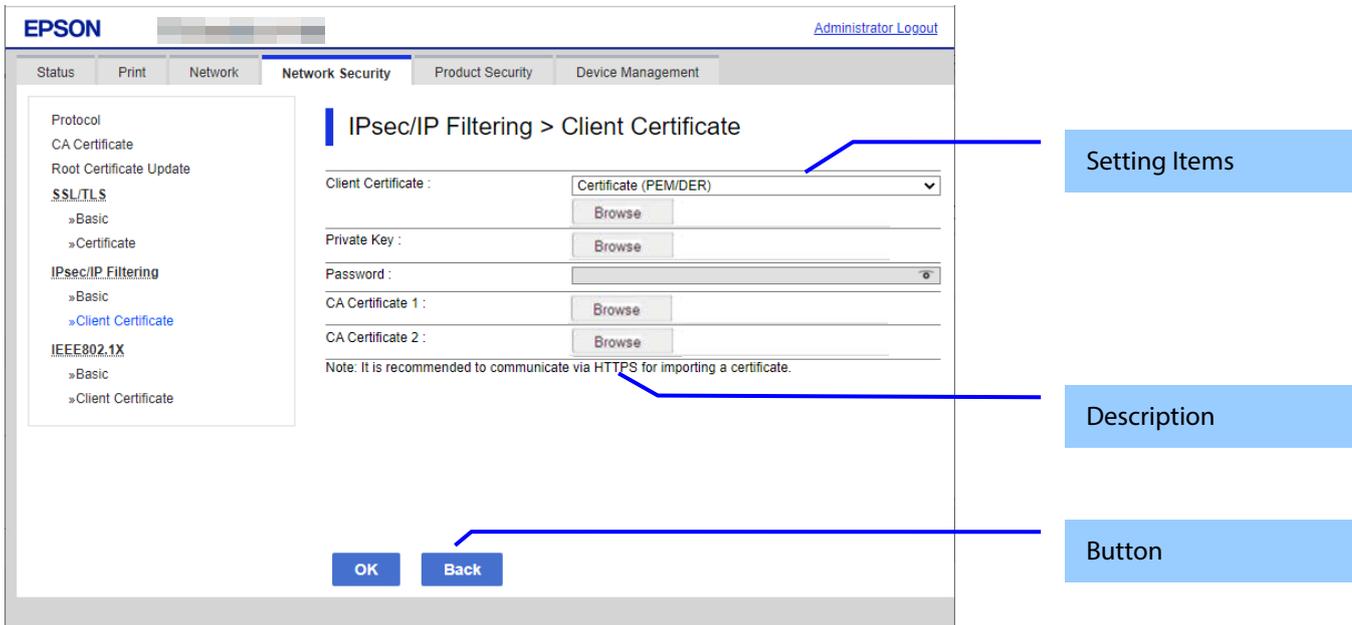


Figure 10-51 Import Top Page

10.4.5.2.3.1.2 Setting Items

On the Import Top Page, the following items can be controlled by the administrator.

Table 10-132 Setting Items

Items	Description	Condition
"Client Certificate"	Enter the file of the Client certificate to import it into the printer. You can also use the file button to select the file.	-
File Format	Choose the file format of the server certificate to import it into the printer. "Certificate (PEM/DER)"/ "Certificate with Private Key (PKCS#12)"	-
"Private Key"	Enter the private key file of the server certificate to import it into the printer. You can also use the file button to select the file.	Only when certificate (PEM/DER) is selected
"Password"	Enter the passphrase for encryption to create a private key. Usable string: ASCII code (0x20-0x7E) Max of 48 characters.	In certificate with private key (PKCS#12) selected only.
"CA Certificate 1"	Enter the file of the certificate signed by CA issuing the server certificate to import it into the printer. You can also use the file button to select the file. Max of 255 characters.	In certificate (PEM/DER) selected only.
"CA Certificate 2"	Enter the file of the certificate signed by CA issuing the first CA certificate to import it into the printer. It also is able to select the file using file button.	In certificate (PEM/DER) selected only.

10.4.5.2.3.1.3 Description

Table 10-133 Description

Items	Description
"Note: It is recommended to communicate via HTTPS when importing a certificate."	Fixed Strings

10.4.5.2.3.1.4 Button

The following table shows the buttons on the page.

Table 10-134 Button

Items	Description
"OK"	Button at the bottom of the main frame to perform importing. After the "OK" button is pressed, Web Config performs the following operations depending on conditions. - If the entered value is invalid, Web Config displays a pop-up window with an error message. - If the entered value is NOT invalid and a Client Certificate was imported already, Web Config displays a pop-up window with a warning message. - If the entered value is NOT invalid and a Client Certificate was NOT imported already, Web Config displays a Result page. - For RED-compliant printers, a security warning pop-up will appear before transitioning to the next page.
"Back"	Button at the bottom of the main frame for going back to the top page of the certificate settings.

10.4.5.2.3.1 Error pop-up Window

10.4.5.2.3.1.1 Confirmation message

Table 10-135 Error pop-up window

Items	Description
"Select a Client Certificate."	This message is shown when the file of the client certificate is not selected.
"CA Certificate 1 is not entered."	When the file of CA certificate1 is not selected but the CA certificate is selected, this message is shown.
"Invalid value below."	The value that was entered incorrectly is shown.

10.4.5.2.3.1.2 Button

The wording of the OK button is displayed according to the display specifications for each Web browser.

Table 10-136 Button

Items	Description
"OK"	The button to go back to the Import Top Page.

10.4.5.2.3.2 Warning pop-up Window

10.4.5.2.3.2.1 Confirmation message

Table 10-137 Warning pop-up window

Items	Description
"The certificate will be overwritten." "Communication will be shut down temporarily."	The pop-up window is displayed to show a warning message if the input value is NOT invalid and a Client Certificate was imported already.
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	The pop-up is displayed for RED-compliant printers.

10.4.5.2.3.2.2 Button

The wording of the OK button and the Cancel button is displayed according to the display specifications for each Web browser.

Table 10-138 Button

Items	Description
"OK"	Overwrites all of the imported certificates. The button to go to the result page.
"Cancel"	The button to go back to the Import Top Page.

10.4.5.2.3.3 Result Page

The following result is shown in the main frame after the “OK” button is pressed.

10.4.5.2.3.3.1 Image

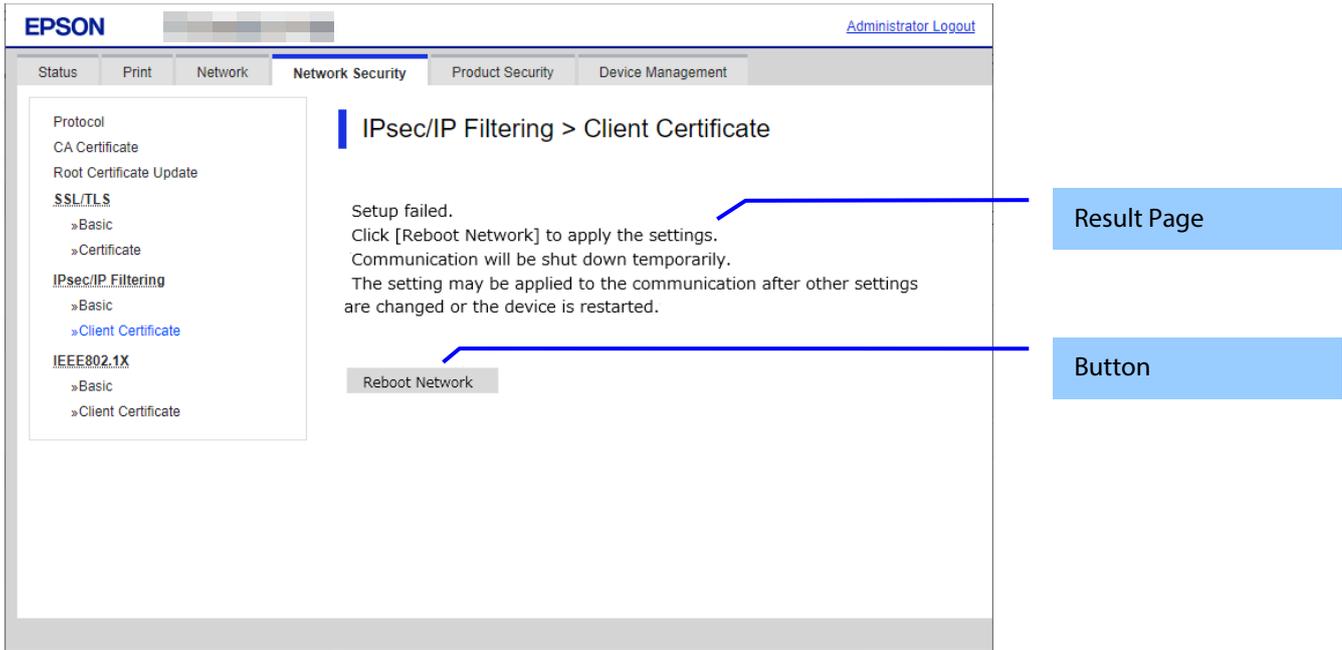


Figure 10-52 Result Page

10.4.5.2.3.3.2 Result

Table 10-139 Result

Items	Description	Redirect from Import Top Page	Redirect from Warning Pop-up	Redirect after Pressing Reboot Network Button
"Setup complete."	This message is shown when importing is completed.	Yes	No	No
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown when importing and overwriting are completed. The network shuts down in order to update.	No	Yes	Yes
"Invalid password."	This message is shown when the entered password is invalid.	Yes	Yes	No
"Invalid file."	This message is shown in the following cases. - The file uses an incorrect format or wrong interrelation. - The file size is greater than the stipulated range of 5k to 24k. (See the note.) - The private key and certificate do not match. - Incorrect chain.	Yes	Yes	No
"Invalid date and time."	This message is shown when an expired certificate is imported, and the date and time are not set.	Yes	Yes	No
"The certificate has expired. Check if the certificate is valid, or check the date and time on the product."	This message is shown when an expired certificate is imported, and the date and time are already set.	Yes	Yes	No

"Cannot use the Client Certificates that include more than three CA certificates."	- This message is shown when a server certificate that includes more than 3 CA-signed certs is imported in PSCS#12.	Yes	Yes	No
"Private key is required."	This message is shown when a private key is required.	Yes	Yes	No
"Setup failed."	This message is shown when importing fails.	Yes	Yes	No
"Setup failed." "Click [Reboot Network] to apply the settings." "Communication will be shut down temporarily." "The setting may be applied to the communication after other settings are changed or the device is restarted."	This message is shown when a network reboot fails.	No	Yes	Yes

Note: If the size of a certificate to be imported is larger than 24KBytes, the device is unable to read it and a Web browser error is shown.

10.4.5.2.3.3.3 Button

Table 10-140 Button

Items	Description	Condition
"Reboot Network"	Reboots the network If the network reboot is successful, Web Config displays the successful result page. If the network reboot fails, Web Config displays the same page.	If the network reboot fails

10.4.5.2.4 Confirm for Client certificate

10.4.5.2.4.1 Top Page

This page is shown after 'Confirm' for the import is pressed in the Client certificate settings. The format of the indicated page is the same as "Confirm for CA-signed certificate".

10.4.5.2.4.1.1 Display Items

Table 10-141 Display Items

Items	Description
"Client Certificate"	Shows the content of the server certificate imported into the printer
"CA Certificate 1"	Shows the content of the first CA-signed certificate imported into the printer
"CA Certificate 2"	Shows the content of the second CA-signed certificate imported into the printer

10.4.5.2.4.1.2 Button

Table 10-142 Button

Items	Description
"Back"	Button at the bottom of the main frame for going back to the top page of the certificate settings.

10.4.5.2.5 Delete for the Client certificate

10.4.5.2.5.1 Warning pop-up Window

A pop-up window is shown when the import "Delete" button for the CA-signed certificate setting is pressed.

10.4.5.2.5.1.1 Confirmation message

Table 10-143 Pop-up window

Items	Description
"Certificate(s) will be deleted."	Static strings.
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	This is displayed for RED-compliant printers.

10.4.5.2.5.1.2 Button

Table 10-144 Button

Items	Description
"OK"	Deletes all of the imported certificates.
"Cancel"	The button to go back to the top page of the certificate settings.

10.4.5.2.5.2 Result Page

When the "OK" button is pressed, result page will be displayed.

10.4.5.2.5.2.1 Setting Result

Table 10-145 Setting Result

Items	Description
"Setup complete."	This message is shown when deletion of the certificate is successful.
"Setup failed."	This message is shown when deletion of the certificate fails.

10.4.5.2.6 Copy overwrite for the Client certificate

10.4.5.2.6.1 Warning pop-up Window

The pop-up window is shown when the "Copy" button is pressed if the Client Certificate was imported in this function. The form of the indicated page is the same as for "Importing for CA-signed certificate".

10.4.5.2.6.1.1 Confirmation message

Table 10-146 Warning pop-up window

Items	Description
"The certificate will be overwritten." "Communication will be shut down temporarily."	The pop-up window is displayed to show a warning message if a Client Certificate was imported already.

10.4.5.2.6.1.2 Button

The wording of the OK button and the Cancel button is displayed according to the display specifications for each Web browser.

Table 10-147 Button

Items	Description
"OK"	Copies and overwrites all of the imported certificates. The button to go to the result page.
"Cancel"	The button to go back to the Import Top Page.

10.4.5.2.6.2 Result Page

When the "OK" button is pressed, result page will be displayed.

10.4.5.2.6.2.1 Setting Result

Table 10-148 Setting Result

Items	Description	Transit from Warning pop-up	Result page
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown when copying and overwriting is completed. The network shuts down for updating.	Yes	Yes
"Setup failed."	This message is shown when copying and overwriting fails.	Yes	Yes

10.4.5.2.7 Generate CSR(Certificate Signing Request)

10.4.5.2.7.1 Generate Top Page

This page is shown after 'Generate' for importing in the CSR settings is pressed.
The format of the indicated page is the same as "SSL/TLS > Certificate> Generate CSR".

10.4.5.2.7.1.1 Image

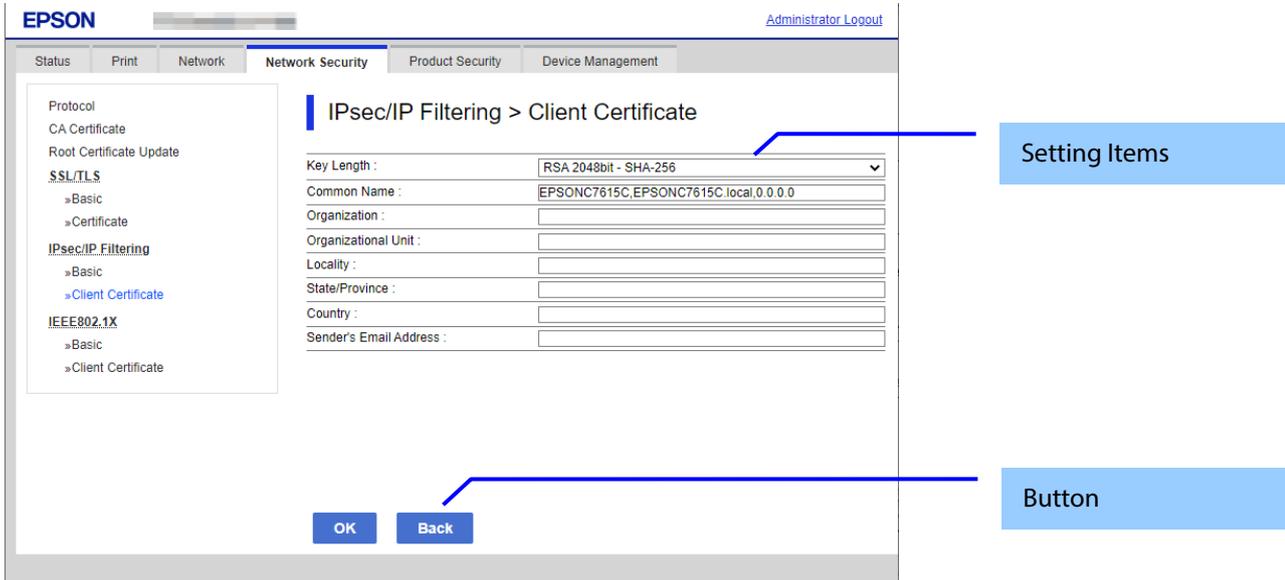


Figure 10-53 Generate CSR(Certificate Signing Request)

10.4.5.2.7.1.2 Setting Items

The user must enter the following information to generate CSR.
The following table shows the items on the page.

Table 10-149 Setting Items

Items	Description
"Key Length"	Use the drop-down list to choose the public key size for generating CSR. "RSA 1024bit- SHA-1" / "RSA 2048bit- SHA-256" / "RSA 3072bit - SHA-256" / "EC 256bit- SHA-256" / "RSA 4096bit - SHA-384" / "EC 384bit - SHA-384" / "EC 521bit- SHA-512"
"Common Name"	Use the text box to input a common name for generating CSR. Entering information is mandatory for generating CSR. Set a string with from 1 to 128 characters in the IPv4 address, IPv6 address, host name, or FQDN format. Commas (",")(0x2c) have a special meaning as control characters. See the NOTE below.
"Organization"	Use the text box to input the organization for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"Organizational Unit"	Use the text box to input the organization unit for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"Locality"	Use the text box to input a locality for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"State/Province"	Use the text box to input a state or province for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"Country"	Use the text box to input the country for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 2 characters If there is no string, the value is treated as a white space.
"Sender's Email Address"	Specify the source address for sending e-mail. Enter an ASCII character string in the range of 0 to 255 characters in the text box. (Excluding: () <> [] ; ¥ " ,)

NOTE: You can enter multiple names for these items.

10.4.5.2.7.1.3 Button

When the “Generate” button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-150 Button

Items	Description
"OK"	Button for generating CSR at the bottom of the main frame.
"Back"	Button at the bottom of the main frame for going back to the top page of the certificate settings.

Table 10-151 Error Pop-up

Items	Description
"Invalid value below. ¥n -%s¥n -%s¥n..."	Shows a warning when a value is entered incorrectly.

10.4.5.2.7.2 Result Page

After the Generate CSR button is pressed, Web Config goes to the Result page.

10.4.5.2.7.2.1 Image

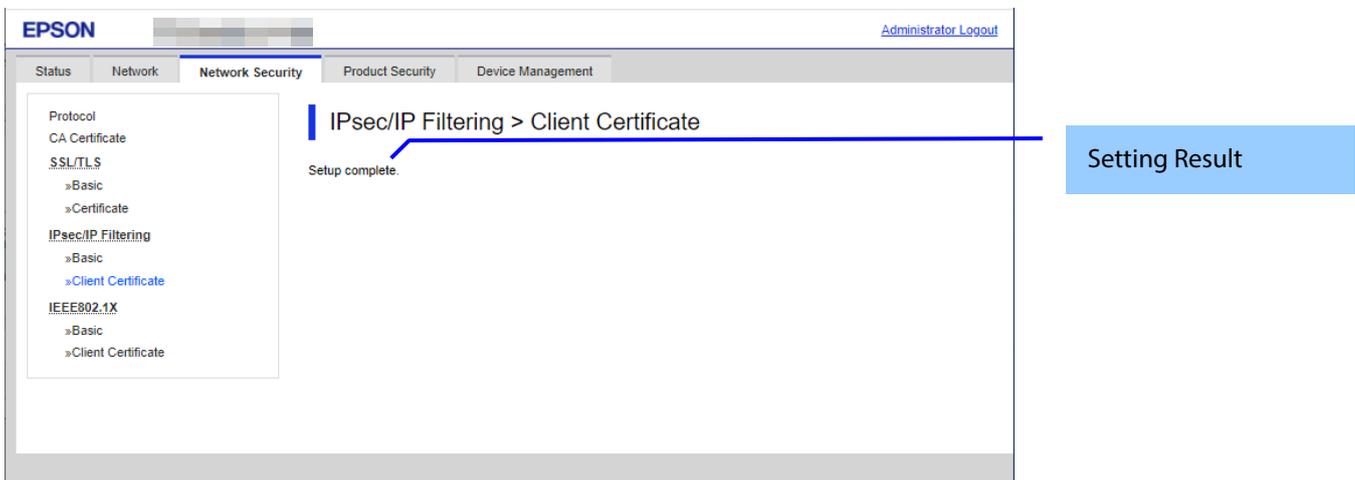


Figure 10-54 Result Page

10.4.5.2.7.2.2 Setting Result

Table 10-152 Setting Result

Items	Description
"Setup complete."	This message is shown when the settings are completed.
"Setup failed."	This message is shown if the settings fail.

10.4.5.2.8 Download CSR(Certificate Signing Request)

This page is shown after ‘Download’ for importing in the CSR settings is pressed.

The default name of the downloaded file is in the form of “EXPORT_CSR_<Serial Number>_<Date and Time>”.

<Serial Number> is the Product’s Serial Number.

<Date and Time> is the Date and Time set for the product.

The method of downloading the CSR varies by Web browser.

10.4.6 IEEE802.1X

In the IEEE802.1X settings area, you can configure the settings related to the HTTP server the printer supports.

Table 10-153 Sub menu

Sub menu
"Basic"
"Client Certificate"

10.4.6.1 Basic

10.4.6.1.1 Top Page in Basic Settings

10.4.6.1.1.1 Image

The following figure shows the layout of the settings for IEEE802.1X basic.

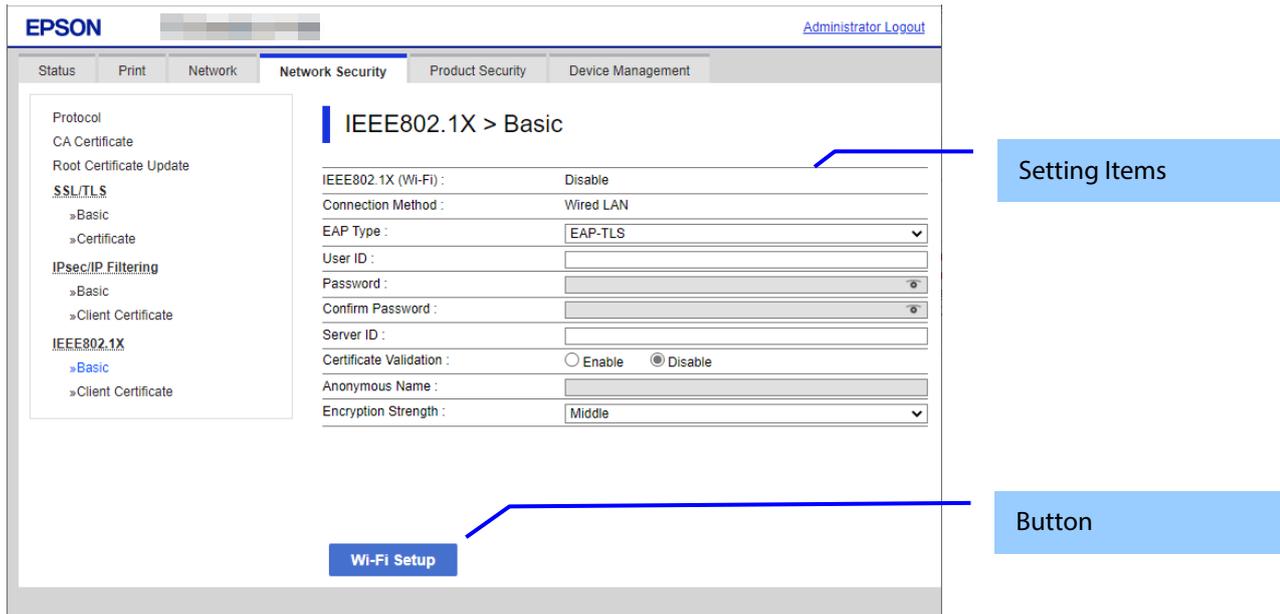


Figure 10-55 IEEE802.1X Top Page in Basic Settings

10.4.6.1.1.2 Setting Items

The following figure shows the layout of this settings area.

Table 10-154 Setting Items

Items	Description	Condition
"IEEE802.1X (Wired LAN)"	Use the radio buttons to select "Enabled" or "Disabled".	Only products that support Wired LAN
"IEEE802.1X (Wi-Fi)"	Display "Enable" or "Disable"	Read Only - Only printers that support WPA2/WPA3-Enterprise
"Connection Method"	Display "Wired LAN" / "Wi-Fi" / "Disable".	Read Only - Only WPA2/WPA3-Enterprise support printers.
"EAP Type"	- If it is not equipped with Wi-Fi chip. Select "EAP-TLS" / "PEAP-TLS" / "PEAP/MSCHAPv2" by drop-down list. - If it is equipped with Wi-Fi chip. Select "EAP-TLS" / "EAP-TTLS" / "PEAP-TLS" / "PEAP/MSCHAPv2" by drop-down list.	-
"User ID"	A text box is provided. The string must be from 0 to 128 bytes with characters in ASCII codes. (0x20 - 0x7E)	-

"Password"	A text box is provided. The string must be from 1 to 128 bytes with characters in ASCII codes. (0x20 - 0x7E) If "EAP Type" is "PEAP/MSCHAPv2" or "EAP-TTLS", character must be entered.	- Not equipped with Wi-Fi chip Can be entered by the user when "EAP Type" is "PEAP/MSCHAPv2" - Equipped with Wi-Fi chip Can be entered by the user when "EAP Type" is "PEAP/MSCHAPv2" or "EAP-TTLS"
"Confirm Password"	Same as Password.	Same as Password
"Server ID"	A text box is provided. The string must be from 0 to 128 bytes with characters in ASCII codes. (0x20 - 0x7E)	-
"Certificate Validation"	Two radio buttons are provided to choose one of the following: "Enable" / "Disable"	Display only models other than TM-m50II-H.
"Certificate Validation (Wired LAN)"	A radio button is provided to choose either of the following: "Enable" / "Disable"	Displayed only for the TM-m50II-H.
"Anonymous Name"	A text box is provided. The string must be from 0 to 128 bytes with characters in ASCII codes. (0x20 - 0x7E)	- When "EAP Type" is "PEAP-TLS", "PEAP/MSCHAPv2" or "EAP-TTLS", user can enter.
"Encryption Strength"	Select "Middle" / "High" by drop-down list.	-

10.4.6.1.1.3 Button

Table 10-155 Button

Items	Description	Condition
"Next"	If pressed, Web Config goes to the Confirm IEEE802.1X Settings page. For RED-compliant printers, a security warning pop-up will appear before transitioning to the next page.	Only Wired LAN support products.
"Wi-Fi Setup"	This is displayed for RED-compliant printers. If pressed, the WebConfig transitions to the SSID Search page.	Only products that support WPA2/WPA3-Enterprise

If Web Config recognizes an error in the entered value after the button is pressed, the following error pop-up is shown.

Table 10-156 Error Pop-up

Items	Description
"Invalid value below."	This message is shown when the value entered in the text box is invalid. The item names of the corrected values are shown under the message in the left cell. If there are two or more items whose values were corrected, those items are listed line by line.
"Passwords you entered do not match."	When the password and the confirmation password do not match, this message is shown.

Table 10-157 Security warning pop-up

Items	Description
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	For RED-compliant printers, clicking the "Next" button will display a confirmation pop-up.

10.4.6.1.2 SSID Search Page

When the “Wi-Fi Setup” button is pressed, Web Config goes to the SSID Search page as shown below. If Web Config confirms periodically that an SSID search has been triggered by access to this page or by pressing the Refresh button, it goes to the Wi-Fi Settings page. If the SSID search has not been completed, Web Config remains on this page. If an SSID search is not possible, Web Config shows the failure result page.

10.4.6.1.2.1 Image

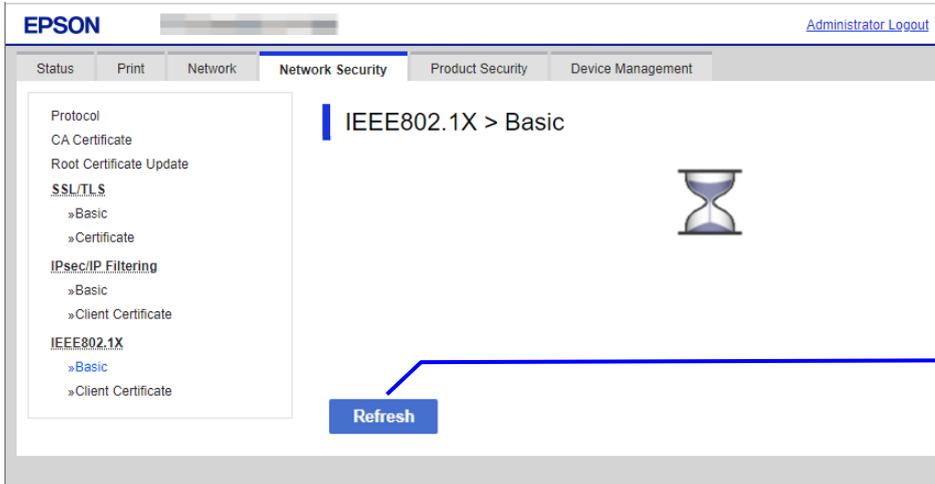


Figure 10-56 SSID Search Page

10.4.6.1.2.2 Button

Table 10-158 Button

Items	Description
"Refresh"	After the Refresh button is pressed, Web Config goes to the Wi-Fi Settings page if an SSID search has been completed. If an SSID search has not been completed, Web Config remains on the SSID Search page.

10.4.6.1.3 Wi-Fi Settings Page

If the Web Config confirms periodically that an SSID search has been done triggered by transition to this page or pressing the Refresh button, it goes to the Wi-Fi Settings page as below. You can choose a SSID on the searched SSID list by choosing a radio button or choose a radio button to specify any SSID manually.

10.4.6.1.3.1 Image

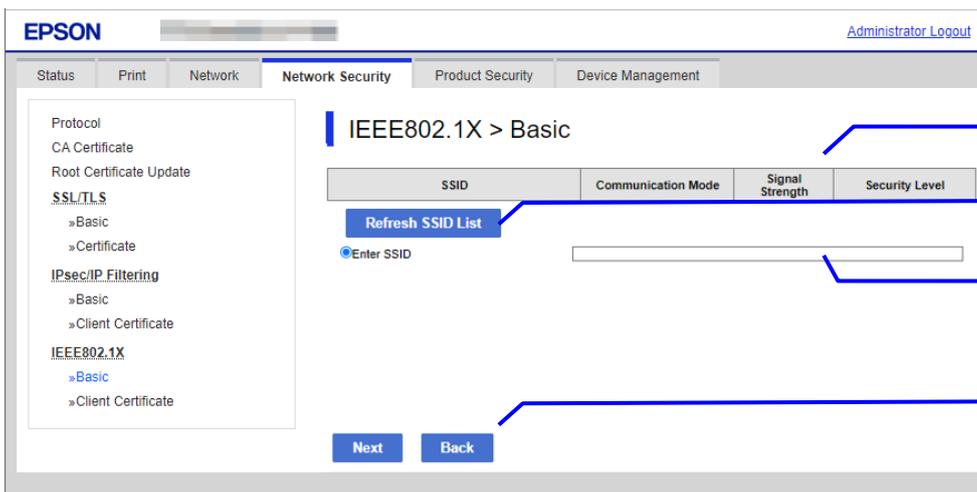


Figure 10-57 Wi-Fi Settings Page

10.4.6.1.3.2 SSID List

Choose an SSID from the list of searched SSIDs as shown below. A list of up to 10 searched SSIDs (only WPA2/WPA3-Enterprise SSIDs) is sorted by signal strength level (strong -> weak).

Table 10-159 SSID List

Items	Description	Condition
"SSID"	Shows the name of each SSID.	-
"Communication Mode"	Shows either of the following communication modes:"Infrastructure"	-
"Signal Strength"	Shows one of the following signal strengths: "Excellent" / "Good" / "Fair" / "No Good" / "Unknown"	This item is displayed for models that use the Wi-Fi chip.
"Security Level"	Shows one of the following security levels: "WPA2/WPA3-Enterprise"	-

10.4.6.1.3.3 SSID Manual Input

You can specify any SSID manually.

Table 10-160 SSID Manual Input

Items	Description
"Enter SSID"	A text box is provided so the user can enter an SSID manually. The string must have 1 to 32 characters. (ASCII codes: 0x20 - 0x7E)

10.4.6.1.3.4 Refresh Button

The Refresh button provides the user with the updated SSID list.

Table 10-161 Refresh Button

Items	Description
"Refresh SSID List"	If pressed, Web Config shows the SSID Search page.

10.4.6.1.3.5 Button

There is a button to proceed to the remaining settings based on the values entered on this page, and a button to go back to the previous page.

Table 10-162 Button

Items	Description
"Next"	This button is used to go forward with Wi-Fi Setup based on the values entered on the Wi-Fi Setup page. If pressed, Web Config goes to the Confirmation page without applying the changes.
"Back"	If pressed, Web Config discards the entered values and goes to the top page of Wi-Fi Setup.

When the "Apply" button is pressed, Web Config displays a pop-up window that shows the following message if it recognizes an error in the entered value.

Table 10-163 Error Pop-up

Items	Description
"Invalid value below."	This message is shown when the value entered for SSID is invalid. The item name of the invalid value is shown under the message in the left cell.

10.4.6.1.4 Confirm IEEE802.1X Settings Page

If the Next button is pressed on the IEEE802.1X Top page or Wi-Fi Settings page, Web Config goes to the Confirm IEEE802.1X Settings page.

10.4.6.1.4.1 Image

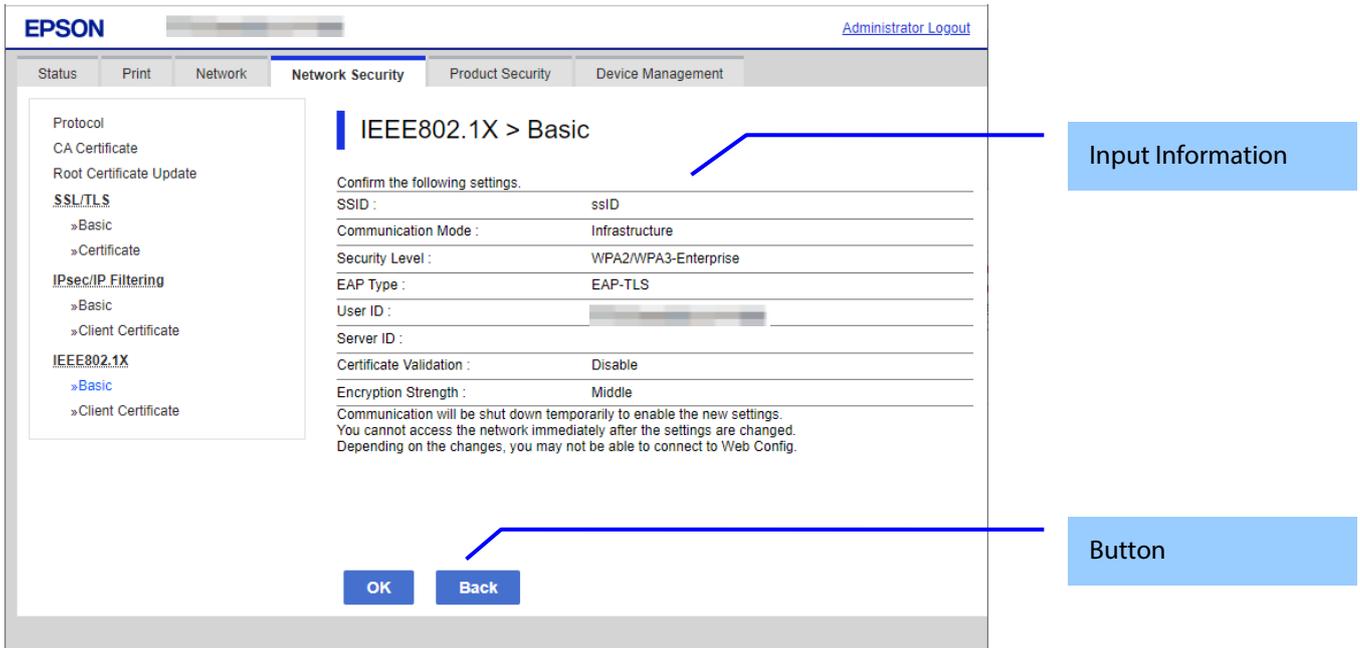


Figure 10-58 Confirm IEEE802.1X Settings Page

10.4.6.1.4.2 Input Information

The display items for entered information are changed from the top page or the Wi-Fi settings page.

Display items of input information is changed from top page or Wi-Fi settings page.

Table 10-164 Comparison of Display Items

Items	From Top Page	From Wi-Fi Settings Page
"SSID"	-	✓
"Communication Mode"	-	✓
"Security Level"	-	✓
"IEEE802.1X(Wired LAN)"	✓	✓
"EAP Type"	✓	✓
"User ID"	✓	✓
"Password"	✓	✓
"Server ID"	✓	✓
"Anonymous Name"	✓	✓
"Encryption Strength"	✓	✓

✓ : display, - : hide

Disabled items on the top page are hidden.

Table 10-165 Description

Items	Description	Condition
"Confirm the following settings."	This message is shown at the top of the page, followed by the setting items and their values.	-
"Communication will be shut down temporarily to enable the new settings." "You cannot access the network immediately after the settings are changed." "Depending on the changes, you may not be able to connect to Web Config."	This message is shown at the bottom of the page.	-

<p><The case of product without LCD panel> "If connection is lost unintentionally, initialize the network settings on the product's control panel. And then configure it again."</p> <p><The case of scanner with LCD panel> "If connection is lost unintentionally, disable IEEE802.1X on the product's control panel. And then configure it again."</p>	<p>This message is shown at the bottom of the page.</p>	<p>- Only from top page</p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------	-----------------------------

10.4.6.1.4.3 Button

There is a button to proceed to the remaining settings based on the values entered on this page, and a button to go back to the previous page.

Table 10-166 Button

Items	Description
<p>"Apply"</p>	<p>This button is used to apply the entered values to the system shown on the Confirm IEEE802.1X Settings page. If pressed, Web Config goes to the Result page.</p>
<p>"Back"</p>	<p>This button is used to go back to the IEEE802.1X Top page in Basic Settings or on the Wi-Fi Settings page.</p>

10.4.6.1.5 Result Page

The following figure shows the page that is displayed after the network settings are processed.

10.4.6.1.5.1 Image

The content of the Result page will vary based on the result (success or failure).

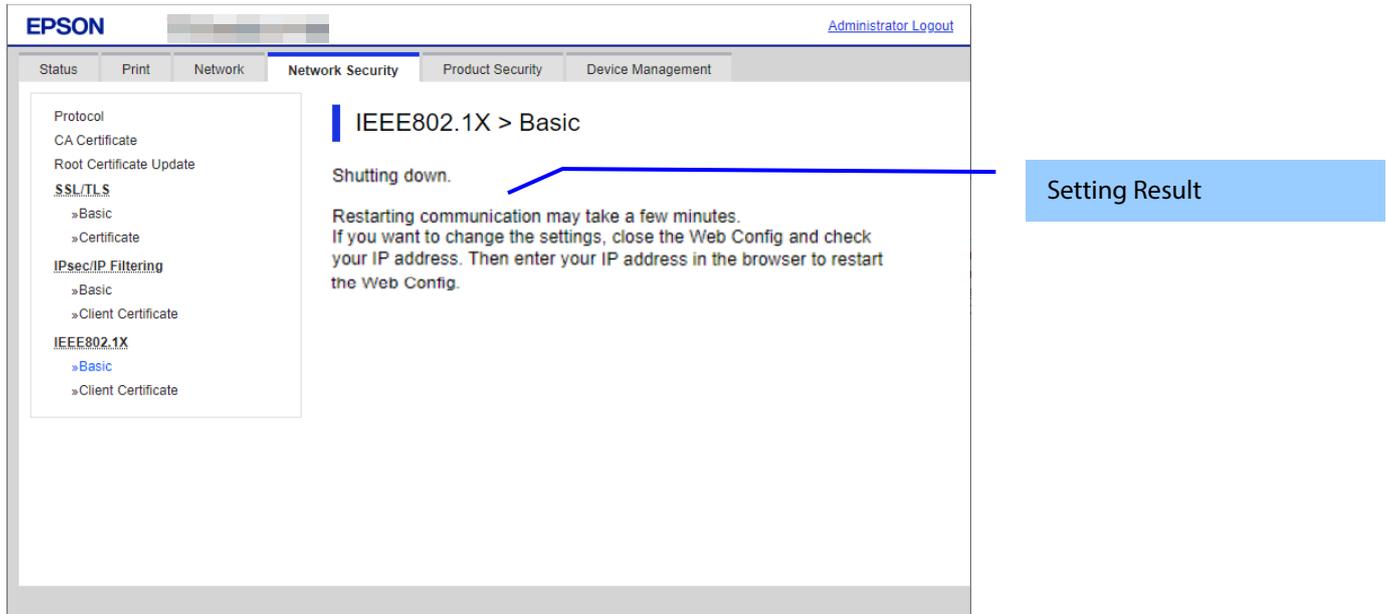


Figure 10-59 Result Page

10.4.6.1.5.2 Setting Result

Table 10-167 Setting Result

Items	Description
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown when the settings are completed. The network shuts down in order to update.
"Setup failed."	- This message is shown if the settings fail.

10.4.6.2 Client Certificate

10.4.6.2.1 Top Page

The following figure shows the layout of the top page for certificate settings.

The format of the indicated page is the same as “IPsec/IP Filtering > Importing for Client certificate”.

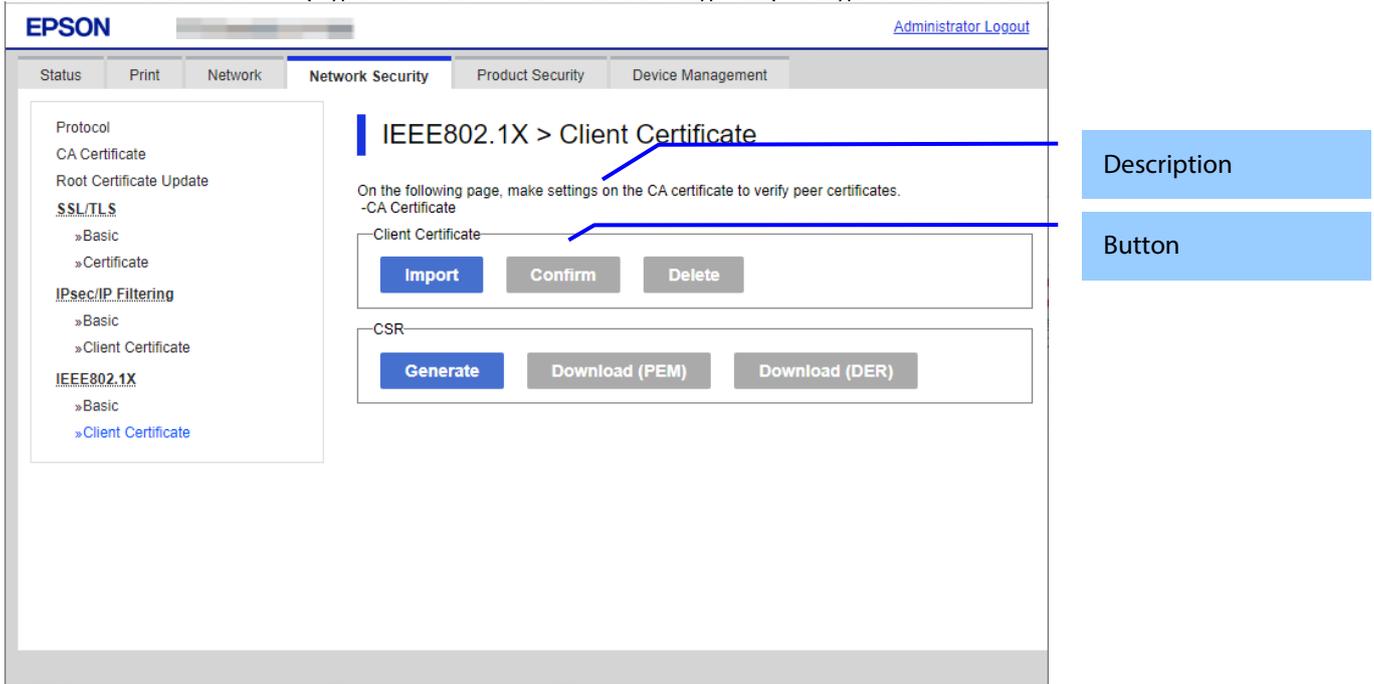


Figure 10-60 Top Page

10.4.6.2.1.1 Description Items

Table 10-168 Description Items

Items	Description
"On the following page, make settings on the CA certificate to verify peer certificates." "-CA Certificate"	Fixed Strings

10.4.6.2.1.2 Copy List

You can choose other functions to copy the certificate to this function.

10-169 Copy List

Items	Description	Condition
"Copy From"	Use the drop-down list to make a choice. "Certificate for SSL/TLS" / "Certificate for IPsec" "Certificate for SSL/TLS" is displayed when Client Certificate is imported in SSL/TLS page. "Certificate for IPsec" is displayed when Client Certificate is imported in IPsec page. "Certificate for S/MIME" is displayed when Client Certificate is imported in S/MIME page.	"Copy From" is displayed when the Client Certificate is imported on the following page: - SSL/TLS page - IPsec page - S/MIME page

10.4.6.2.1.3 Button

The following table shows the buttons on the page.

Table 10-170 Button

Items (Group Name)	Items (Button Name)	Description	Condition
"Client Certificate"	"Import"	Button for importing Client certificate	-
	"Confirm"	Button for confirming the imported Client certificate	Client certificate imported.
	"Delete"	Button for deleting the imported Client certificate	Client certificate imported
	"Copy"	Button for copying client certificates from other functions If the client certificate has already been imported with this feature, or if the printer is a RED-compliant printer, a warning pop-up will appear.	The "Copy" button is displayed when the Client Certificate is imported on the following page - SSL/TLS page - IPsec page
"CSR"	"Generate"	Button for moving to the settings page to generate CSR	-
	"Download (PEM)"	Button for downloading the CSR data in PEM format	CSR created.
	"Download (DER)"	Button for downloading the CSR data in PEM format	CSR created.

Table 10-171 Warning pop-up window

Items	Description
"The certificate will be overwritten." "Communication will be shut down temporarily."	The pop-up window is displayed to show a warning message if the input value is NOT invalid and a Client Certificate was imported already.
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	The pop-up is displayed for RED-compliant printers.

10.4.6.2.2 Result Page

The following result is shown in the main frame after the “Copy” button is pressed.

10.4.6.2.2.1 Image

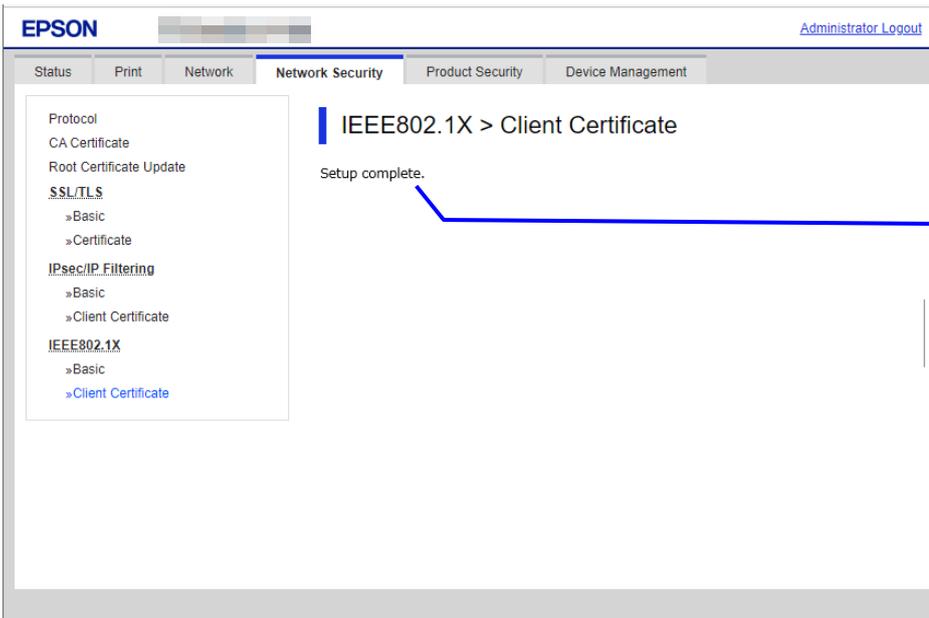


Figure 10-61 Result Page

10.4.6.2.2.2 Result

Table 10-172 Result Page

Items	Description
"Setup complete."	This message is shown when importing without overwriting is completed.
"Setup failed."	This message is shown if the settings fail.

10.4.6.2.3 Importing for Client Certificate

10.4.6.2.3.1 Import Top Page

This page is shown after the 'Import' button in the Client certificate settings is pressed. The format of the indicated page is the same as "IPsec/IP Filtering > Importing for Client certificate".

10.4.6.2.3.1.1 Setting Items

On the Import Top Page, the following items can be controlled by the administrator.

Table 10-173 Setting Items

Items	Description	Condition
"Client Certificate"	Enter the file of the Client certificate to import it into the printer. You can also use the file button to select the file.	-
File Format	Choose the file format of the server certificate to import it into the printer. "Certificate (PEM/DER)" / "Certificate with Private Key (PKCS#12)"	-
"Private Key"	Enter the private key file of the server certificate to import it into the printer. You can also use the file button to select the file.	Only when certificate (PEM/DER) is selected
"Password"	Enter the passphrase for encryption to create a private key. Usable string: ASCII code (0x20-0x7E) Max of 48 characters.	Only if certificate with private key (PKCS#12) is selected
"CA Certificate 1"	Enter the file of the certificate signed by CA issuing the server certificate to import it into the printer. You can also use the file button to select the file. Max of 255 characters.	In certificate (PEM/DER) selected only.
"CA Certificate 2"	Enter the file of the certificate signed by CA issuing the first CA certificate to import it into the printer. It also is able to select the file using file button.	In certificate (PEM/DER) selected only.

10.4.6.2.3.1.2 Description Items

Table 10-174 Description Items

Items	Description
"Note: It is recommended to communicate via HTTPS for importing a certificate."	Fixed Strings

10.4.6.2.3.1.3 Button

The following table shows the button on the page.

Table 10-175 Button

Items	Description
"OK"	Button at the bottom of the main frame to perform importing. After the "OK" button is pressed, Web Config performs the following operations depending on conditions. - If the entered value is invalid, Web Config displays a pop-up window with an error message. - If the entered value is NOT invalid and a Client Certificate was imported already, Web Config displays a pop-up window with a warning message. - If the entered value is NOT invalid and a Client Certificate was NOT imported already, Web Config displays a Result page. - For RED-compliant printers, a security warning pop-up will appear before transitioning to the next page.
"Back"	Button at the bottom of the main frame for going back to the top page of the certificate settings.

10.4.6.2.3.2 Error Pop-up Window

If the “OK” button is pressed, the error pop-up window is shown if the entered value is invalid.
The format of the indicated page is the same as “IPsec/IP Filtering > Importing for Client certificate”.

10.4.6.2.3.2.1 Confirmation Message

Table 10-176 Error Pop-up Window

Items	Description
"Select a Client Certificate."	This message is shown when the file of the client certificate is not selected.
"CA Certificate 1 is not entered."	If the file of the CA certificate1 is not selected but the CA certificate is selected, this message is shown.
"Invalid value below."	Shown if an entered value error occurs

10.4.6.2.3.2.2 Button

The wording of the OK button is displayed according to the display specifications for each Web browser.

Table 10-177 Button

Items	Description
"OK"	Button for going back to the Import Top Page.

10.4.6.2.3.3 Warning Pop-up Window

If the “OK” button is pressed, the error pop-up window is shown if the Server Certificate was imported already.
The format of the indicated page is the same as “IPsec/IP Filtering > Importing for Client certificate”.

10.4.6.2.3.3.1 Confirmation Message

Table 10-178 Warning Pop-up Window

Items	Description
"The certificate will be overwritten." "Communication will be shut down temporarily."	If the entered value is NOT invalid and a Client Certificate was imported already, a pop-up window with a warning message is displayed.
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	The pop-up is displayed for RED-compliant printers.

10.4.6.2.3.3.2 Button

The wording of the OK button and the Cancel button is displayed according to the display specifications for each Web browser.

Table 10-179 Button

Items	Description
"OK"	Overwrites all of the imported certificates Button for going to the result page.
"Cancel"	Button for going back to the Import Top Page.

10.4.6.2.3.4 Result Page

The following result is shown in the main frame after the “OK” button is pressed.
The format of the indicated page is the same as “IPsec/IP Filtering > Importing for Client certificate”.

10.4.6.2.3.4.1 Result

Table 10-180 Result

Items	Description	Redirect from Import Top Page	Redirect from Warning Pop-up	Redirect after Pressing Reboot Network Button
"Setup complete."	This message is shown when importing is completed.	Yes	No	No
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown when importing and overwriting are completed. The network shuts down in order to update.	No	Yes	Yes
"Invalid password."	This message is shown when the entered password is invalid.	Yes	Yes	No
"Invalid file."	This message is shown in the following cases. - The file uses an incorrect format or wrong interrelation. - The file size is greater than the stipulated range of 5k to 24k. (See the note.) - The private key and certificate do not match. - Incorrect chain.	Yes	Yes	No
"Invalid date and time."	This message is shown when an expired certificate is imported, and the date and time are not set.	Yes	Yes	No
"The certificate has expired. Check if the certificate is valid, or check the date and time on the product."	This message is shown when an expired certificate is imported, and the date and time are already set.	Yes	Yes	No
"Cannot use the Client Certificates that include more than three CA certificates."	This message is shown when a server certificate that includes more than 3 CA-signed certs is imported in PSCS#12.	Yes	Yes	No
"Private key is required."	This message is shown when a private key is required.	Yes	Yes	No
"Setup failed."	This message is shown when importing fails.	Yes	Yes	No
"Setup failed." "Click [Reboot Network] to apply the settings." "Communication will be shut down temporarily." "The setting may be applied to the communication after other settings are changed or the device is restarted."	This message is shown when a network reboot fails.	No	Yes	Yes

Note: If the size of a certificate to be imported is larger than 24KBytes, the device is unable to read it and a Web browser error is shown.

10.4.6.2.3.4.2 Button

Table 10-181 Button

Items	Description	Condition
"Reboot Network"	Reboots the network If the network reboot is successful, Web Config displays the successful result page. If the network reboot fails, Web Config displays the same page.	If the network reboot fails

10.4.6.2.4 Confirm for Client Certificate

This page is shown after 'Confirm' for the import is pressed in the Client certificate settings.
The format of the indicated page is the same as "IPsec/IP Filtering > Confirm for Client certificate".

10.4.6.2.4.1 Display Items

Table 10-182 Display Items

Items	Description
"Client Certificate"	Shows the content of the server certificate imported into the printer
"CA Certificate 1"	Shows the content of the first CA-signed certificate imported into the printer
"CA Certificate 2"	Shows the content of the second CA-signed certificate imported into the printer

10.4.6.2.4.2 Button

Table 10-183 Button

Items	Description
"Back"	Button at the bottom of the main frame for going back to the top page of the certificate settings.

10.4.6.2.5 Delete for the Client Certificate

10.4.6.2.5.1 Warning Pop-up Window

A pop-up window is shown when the import "Delete" button for the Client certificate setting is pressed.

10.4.6.2.5.1.1 Confirmation message

Table 10-184 Pop-up window

Items	Description
"Certificate(s) will be deleted."	Static strings.
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	This is displayed for RED-compliant printers.

10.4.6.2.5.1.2 Button

Table 10-185 Button

Items	Description
"OK"	Deletes all of the imported certificates.
"Cancel"	The button to go back to the top page of the certificate settings.

10.4.6.2.5.2 Result Page

The following result is shown in the main frame after the “OK” button is pressed.

10.4.6.2.5.2.1 Image

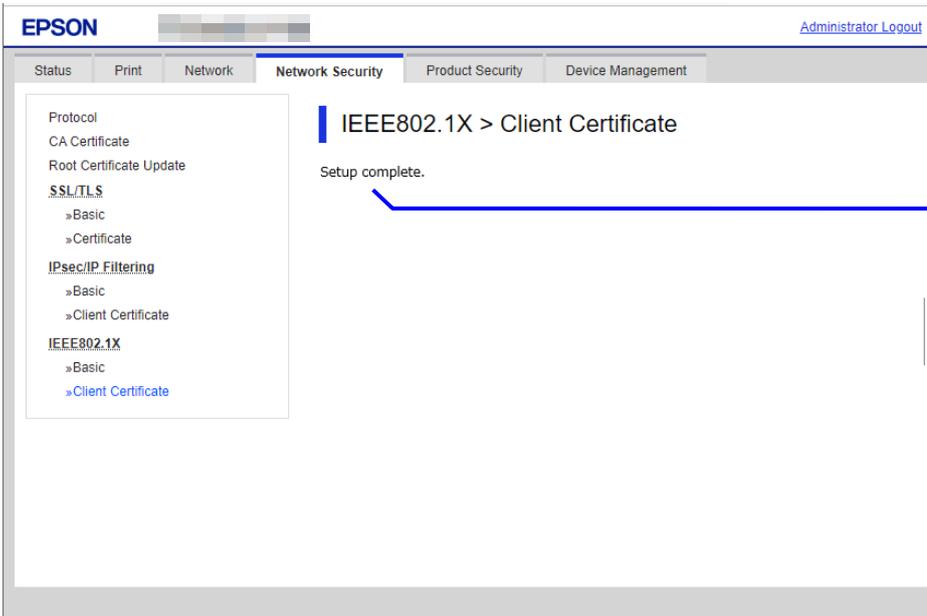


Figure 10-62 Result Page

10.4.6.2.5.2.2 Result

Table 10-186 Result Page

Items	Description
"Setup complete."	This message is shown when deleting the certificate is successful.
"Setup failed."	This message is shown when deleting the certificate fails.

10.4.6.2.6 Copying and Overwriting a Client Certificate

10.4.6.2.6.1 Warning Pop-up Window

A pop-up window is shown when the 'Copy' is pressed if the Client Certificate was imported with this function. The format of the indicated page is the same as "Importing for CA-signed certificate".

10.4.6.2.6.1.1 Confirmation Message

Table 10-187 Warning Pop-up Window

Items	Description
"The certificate will be overwritten." "Communication will be shut down temporarily."	If the Client Certificate was imported already, a pop-up window with a warning message is displayed.

10.4.6.2.6.1.2 Button

The wording of the OK button and the Cancel button is displayed according to the display specifications for each Web browser.

Table 10-188 Button

Items	Description
"OK"	Overwrites all of the imported certificates Button for going to the result page.
"Cancel"	Button for going back to the Import Top Page.

10.4.6.2.6.2 Result Page

The following result is shown in the main frame after the "OK" button is pressed. The format of the indicated page is the same as "IPsec/IP Filtering > Copying and overwriting Client certificate".

10.4.6.2.6.2.1 Result

Table 10-189 Result

Items	Description	Transit from Warning Pop-up	Result Page
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown when copying and overwriting are completed. The network shuts down in order to update.	Yes	Yes
"Setup failed."	This message is shown when copying and overwriting fail.	Yes	Yes

10.4.6.2.7 Generate CSR(Certificate Signing Request)

10.4.6.2.7.1 Generate Top Page

This page is shown after 'Generate' for importing in the CSR settings is pressed.
The format of the indicated page is the same as "SSL/TLS > Certificate> Generate CSR".

10.4.6.2.7.1.1 Setting Items

The user must enter the following information to generate CSR.
The following table shows the items on the page.

Table 10-190 Setting Items

Items	Description
"Key Length"	Use the drop-down list to choose the public key size for generating CSR. "RSA 1024bit - SHA-1" / "RSA 2048bit - SHA-256" / "RSA 3072bit - SHA-256" / "EC 256bit - SHA-256" / "RSA 4096bit - SHA-384" / "EC 384bit - SHA-384" / "EC 521bit - SHA-512"
"Common Name"	Use the text box to input a common name for generating CSR. Entering information is mandatory for generating CSR. Set a string with from 1 to 128 characters in the IPv4 address, IPv6 address, host name, or FQDN format. Commas (",")(0x2c) have a special meaning as control characters. See the NOTE below.
"Organization"	Use the text box to input the organization for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"Organizational Unit"	Use the text box to input the organization unit for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"Locality"	Use the text box to input a locality for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"State/Province"	Use the text box to input a state or province for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 64 characters If there is no string, the value is treated as a white space.
"Country"	Use the text box to input the country for generating CSR. Usable string: US-ASCII (0x20-0x7e), Max. 2 characters If there is no string, the value is treated as a white space.
"Sender's Email Address"	Specify the source address for sending e-mail. Enter an ASCII character string in the range of 0 to 255 characters in the text box. (Excluding: () <> [];¥“,”)

NOTE: You can enter multiple names for these items.

10.4.6.2.7.1.2 Button

Table 10-191 Button

Items	Description
"OK"	Button for generating CSR at the bottom of the main frame
"Back"	Button at the bottom of the main frame for going back to the top page of the certificate settings.

When the "Generate" button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-192 Error Pop-up

Items	Description
"Invalid value below. ¥n -%s¥n -%s¥n..."	Shows a warning when a value is entered incorrectly.

10.4.6.2.7.1.3 Result Page

After the Generate CSR button is pressed, Web Config goes to the Result page.

Table 10-193 Setting Result

Items	Description
"Setup complete."	This message is shown when the settings are completed.
"Setup failed."	This message is shown if the settings fail.

10.4.6.2.8 Download CSR(Certificate Signing Request)

This page is shown after 'Download' for importing in the CSR settings is pressed.

The default name of the downloaded file is in the form of "EXPORT_CSR_<Serial Number>_<Date and Time>".

<Serial Number> is the Product's Serial Number.

<Date and Time> is the Date and Time set for the product.

The method of downloading the CSR varies by Web browser.

10.5 Product Security

10.5.1 Password Encryption

10.5.1.1 Top Page

10.5.1.1.1 Image

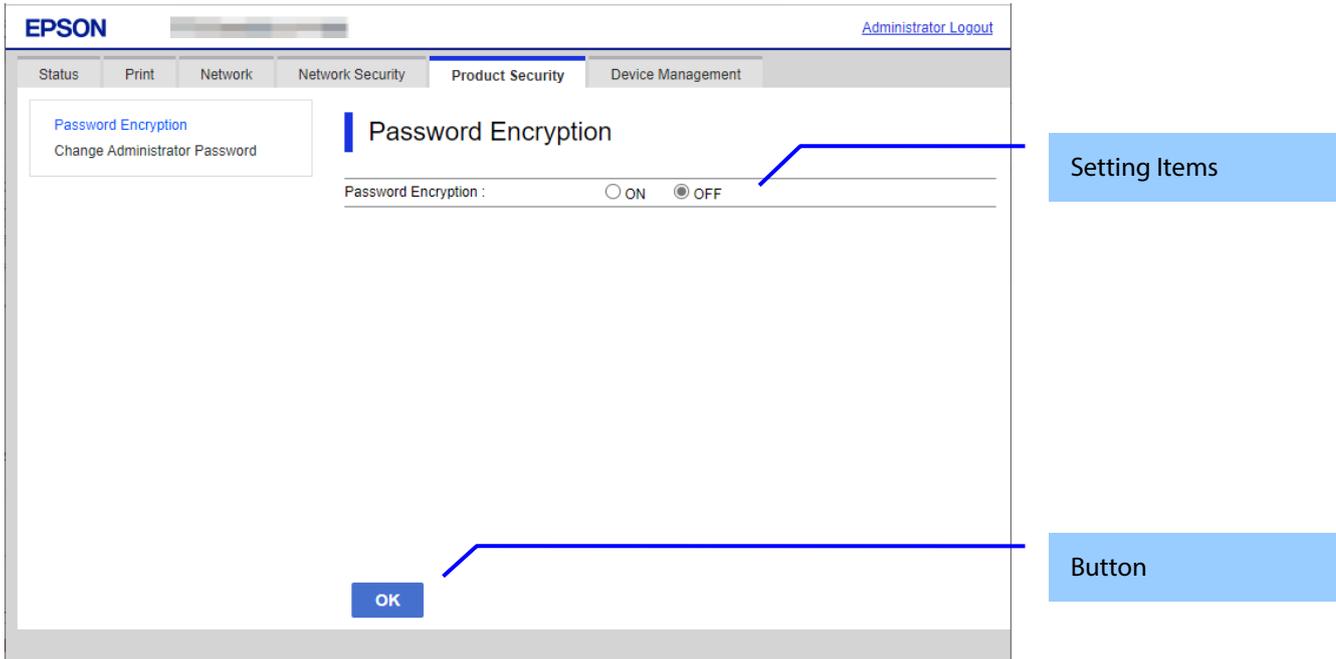


Figure 10-63 Password Encryption

10.5.1.1.2 Setting Items

The following table shows the item on the page.

Table 10-194 Setting Items

Items	Description	Condition
"Password Encryption"	Two radio buttons are provided to choose either of the followings: "ON" / "OFF"	Display only on software encryption models.
"Password Encryption"	Display the following set values as a string. "ON" / "OFF"	Display only on TPM encryption models.

10.5.1.1.3 Button

The following table shows the button on the page.

Table 10-195 Button

Items	Description	Condition
"OK"	The button on bottom of the main frame to perform setting.	Display only on software encryption models.

10.5.1.1.4 Confirmation Dialog

Table 10-196 Confirmation Dialog

Items	Description
"Restart the printer to apply the password encryption setting. If you turn the power off while restart is in progress, data may be damaged and the printer settings are restored to defaults."	Displayed when "Setting" button is pressed.
"Changing this setting may affect the protection of your personal information. For information about security risks resulting from changing the settings, please refer to the Security Guidebook at the following URL: https://support.epson.net/security Change the setting?"	This is displayed for RED-compliant printers.

10.5.1.2 Result Page

The result message is shown on the main frame after "OK" button is pressed.

10.5.1.2.1 Image

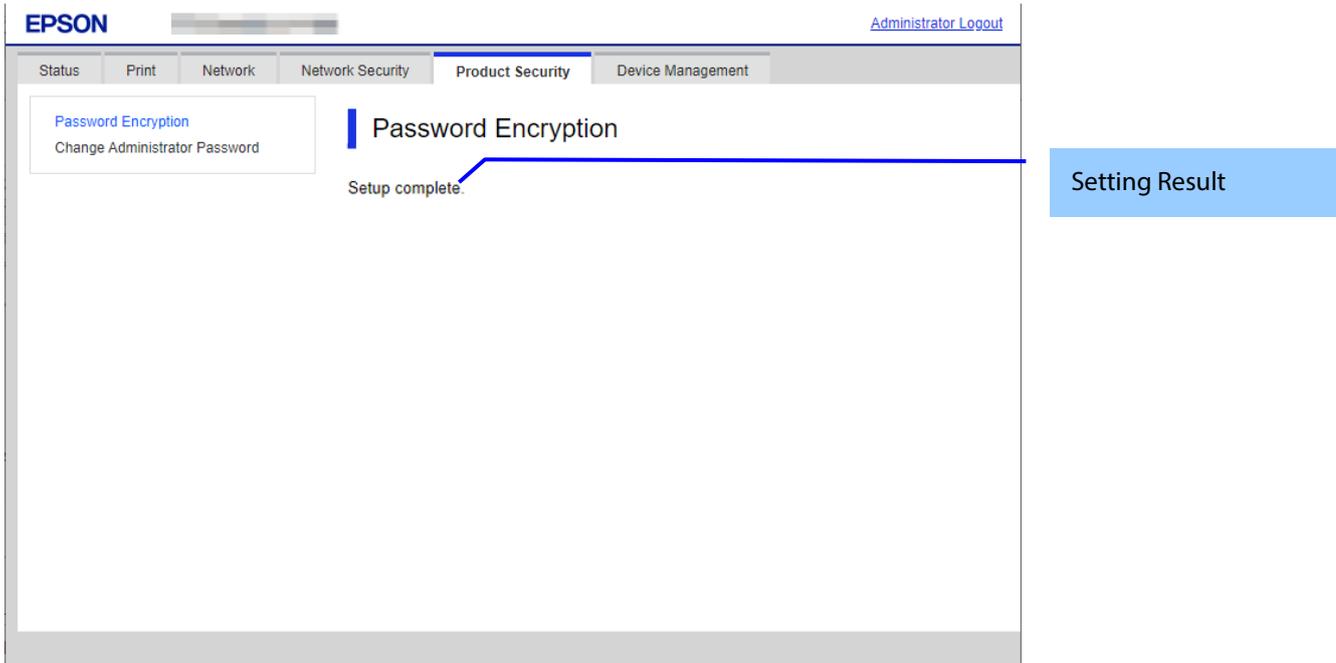


Figure 10-64 Result Page

10.5.1.2.2 Setting Result

Table 10-197 Result Page

Items	Description
"Setup complete."	This message is shown when the settings are completed successfully.
"Setup failed."	This message is shown if setup is failed.

10.5.2 Audit Log

This is displayed when RED is enabled.

10.5.2.1 Top Page

10.5.2.1.1 Setting Items

The following table shows the setting items for "Audit log setting".

Table 10-198 Setting Items

Items	Description
"Audit log setting"	Two radio buttons are provided to choose either of the followings: "ON" / "OFF"

10.5.2.1.1 Display Items

The following table shows the display items for outputting audit logs.

Table 10-199 Display Items

Items	Description
"Exports the audit logs to the CSV file."	Fixed string

The following table shows the display items for deleting all audit logs.

Table 10-200 Display Items

Items	Description
"Deletes all audit logs."	Fixed string

10.5.2.1.2 Button

The following table shows the buttons on the page.

Table 10-201 Button

Items	Description
"OK"	The button on the bottom of the "Audit log setting" to perform settings.
"Export"	When the "Export" button is pressed, the CSV file for the recorded audit log is output. If creating of the CSV file fails, an error page is shown. The default name of the downloaded file is in the form of "Devlog_<Serial Number>_<Date and Time>". <Serial Number> is the Serial Number for the product. <Date and Time> is Date and Time set for the product.
"Delete"	When the "Delete" button is pressed, the error pop-up window is shown.

Table 10-202 Pop-up

Items	Description
"Delete all?"	When the "Delete" button is pressed, this pop-up is shown. If the "OK" button is pressed, all audit logs are deleted and the result page is shown. If the "Cancel" button is pressed, the screen returns to the Audit log top page.

10.5.2.2 Result Page

When the "OK" button is pressed, result page will be displayed.

10.5.2.2.1 Setting Result

Table 10-203 Result

Items	Description
"Setup complete."	This message is shown when the "OK" button is pressed and the settings are completed.
"Failed to export the file." "Try again later."	This message is shown when the "Export" button is pressed and log output failed. If log output is executed simultaneously with other interfaces, output will fail.(This case is very rare)
"All logs deleted successfully."	This message is shown when the "Delete" button is pressed and all items are cleared.
"Setup failed."	This message is shown if setup fails.

10.5.3 Change Administrator Password

In this area, the user can change the authentication information for an administrator. The settings that are configured by the user in this area are used when an administrator logs on.

10.5.3.1 Top Page

10.5.3.1.1 Image

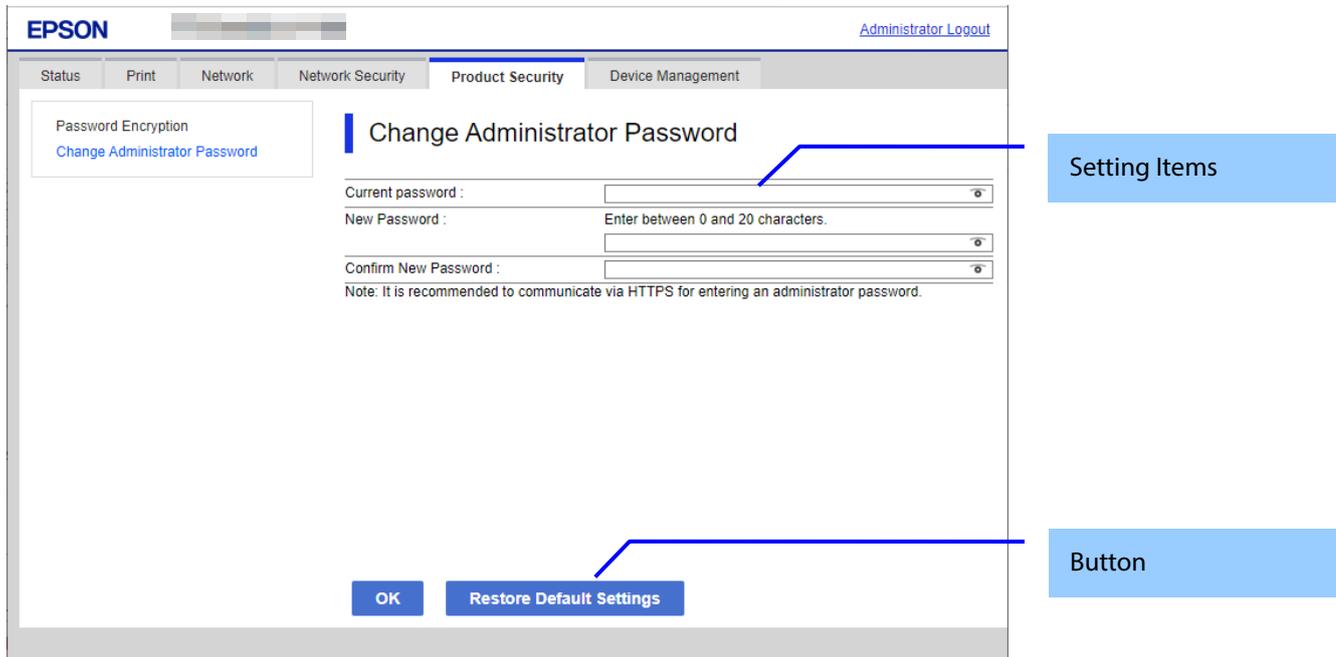


Figure 10-65 Change Administrator Password

10.5.3.1.2 Setting Items

The following table shows the items on the page.

Table 10-204 Setting Items

Items	Description	Condition
"Current password"	Text box for entering the current password	-
"New Password"	Text box for entering the current user's name. Usable string: ASCII code (0x20-0x7E) from 0 to 20 characters.	-
"Enter between %d and 20 characters. "	A message for inputting characters. <ul style="list-style-type: none"> ● UK PSTI Bill and ISO15408 corresponding model Display "1~20 characters" if "Password Policy" is selected in "Enable". Display "8~20 characters" if "Password Policy" is selected in "Disable". ● UK PSTI Bill corresponding only model "8~20 characters" ● ISO15408 corresponding only model ● Other models "1~20 characters" 	-
"Confirm New Password"	Text box for entering a new password. Usable string: ASCII code (0x20-0x7E) Max of 20 characters.	-

	However, if the password is against the password policy, the setting will fail.	
"Note: It is recommended to communicate via HTTPS for entering an administrator password."	Message for entering characters.	-

10.5.3.1.3 Button

The following table shows the buttons on the page.

Table 10-205 Button

Items	Description	Condition
"OK"	Button at the bottom of the page	-
"Restore Default Settings"	If pressed, Web Config restores the setting values to the factory defaults.	Displayed only on models that support the initial value for the administrator password.

When the "OK" button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-206 Error Pop-up

Items	Description
"Invalid value below."	When the format of the entered user name or password is not correct, this message is shown.
"Password and confirm password do not match."	When new password and the confirmation password do not match, this message is shown.

10.5.3.2 Result Page

The result message is shown in the main frame after the “OK” button is pressed.

10.5.3.2.1 Image

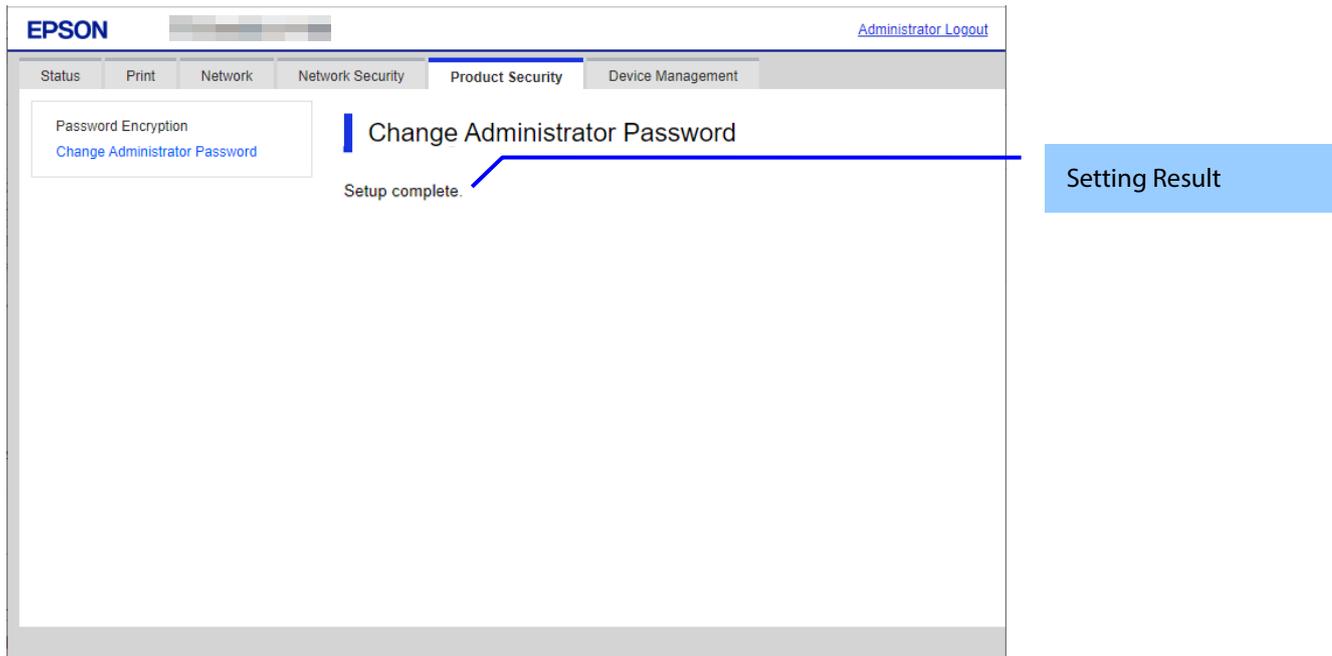


Figure 10-66 Image

10.5.3.2.2 Setting Result

Table 10-207 Result

Items	Description
"Setup complete."	This message is shown when the settings are completed. After that, Web Config reloads the page and displays the product status page. If an administrator was logged on previously, Web Config maintains administrator logon mode. If a user other than an administrator was logged on, Web Config exits administrator logon mode.
"Failed to make the settings." "The password you entered is incorrect."	This message is shown if the current password entered by the user is incorrect. None of the setting items on this page are applied to the printer.
"The password does not meet the password policy requirements. Check the requirements."	This message is shown if setup fails due to a violation of the Password Policy.
"Setup failed."	This message is shown if setup fails for a reason other than those described above.

10.6 Device Management

10.6.1 Export and Import Setting Value

On the Setting Export and Import page, the user can export Web Config advanced settings to a file, and import those settings from a configuration file.

Table 10-208 Sub menu of Export/Import

Sub menu	
"Export"	
"Import"	

10.6.1.1 Export/Import Category

The user can select an export/import category that includes multiple setting items. The categories and setting items are shown below. Some categories contain sub-categories. If the parent category is selected, all sub-categories are selected.

Table 10-209 Export/Import Category.

Category	Description
"All"	All categories are selected.
"Print"	All subcategories are selected.
"Print Settings"	For print settings on the menu.
"Secure Printing"	It intends Secure Printing on the menu.
"Network"	All sub-categories are selected.
"Basic"	All sub-categories are selected.
"Settings except below"	Network Settings > Basic in the menu is selected, except for the following settings.
"Device Name"	Printer Name in Network Basic is selected.
"Location"	Location in Network Basic is selected.
"Obtain IP Address, IP Address, Subnet Mask, and Default Gateway"	Obtain IP Address, IP Address, Subnet Mask, and Default Gateway in Network Basic are selected.
"IPv6 Address and IPv6 Address Default Gateway"	IPv6 Address and IPv6 Address Default Gateway in Network Basic are selected.
"Wi-Fi"	Wi-Fi in the menu is selected.
"Wired LAN"	Wired LAN in the menu is selected.
"Wi-Fi Direct"	Not equipped with Wi-Fi chip Wi-Fi Direct in the menu is selected.
"Settings except below"	Equipped with Wi-Fi chip All sub-categories are selected.
"SSID and Password"	Equipped with Wi-Fi chip Network > Wi-Fi Direct in the menu is selected, except for the following settings. If it is equipped with Wi-Fi chip. It intends SSID and Password of Wi-Fi Direct.
"Network Security"	All sub-categories are selected.
"Protocol"	All sub-categories are selected.
"Settings except below"	Services > Protocol in the menu is selected except for the following settings.
"Bonjour Service Name"	Bonjour Service Name of Protocol is selected.
"SSL/TLS"	All sub-categories are selected.
"Basic"	Basic of SSL/TLS in the menu is selected.
"Certificate"	Server Certificate of SSL/TLS in the menu is selected.
"Automatic Certificate Update"	This applies to Automatic Certificate Update on the menu.
"IPsec/IP Filtering"	All sub-categories are selected.
"Basic"	Basic of IPsec/IP Filtering in the menu is selected.
"Client Certificate"	Client Certificate Settings in IPsec/IP Filtering Certificate is selected.
"IEEE802.1X"	All sub-categories are selected.
"Basic"	Basic of IEEE802.1X in the menu is selected.
"Client Certificate"	Client Certificate Settings in IEEE802.1X Certificate is selected.
"CA Certificate"	CA Certificate in the menu is selected.
"Product Security"	All sub-categories are selected.
"Access Control Settings"	Access Control Settings in the menu is selected.
"Password Encryption"	Password Encryption in the menu is selected.
"Administrator Password"	Administrator Password in the menu is selected.
"Device Management"	All sub-categories are selected.

"Administrator Name/Contact Information"	Administrator Name/Contact Information in the menu is selected.
"Date and Time"	Date and Time (Display Format, Time Difference, and Time Server) in the menu are selected.

10.6.1.2 Export

The Export page consists of a Top page and a Result page.

10.6.1.2.1 Top Page

10.6.1.2.1.1 Image

When "Export" is chosen in the menu frame, the top page for export is displayed as shown below.

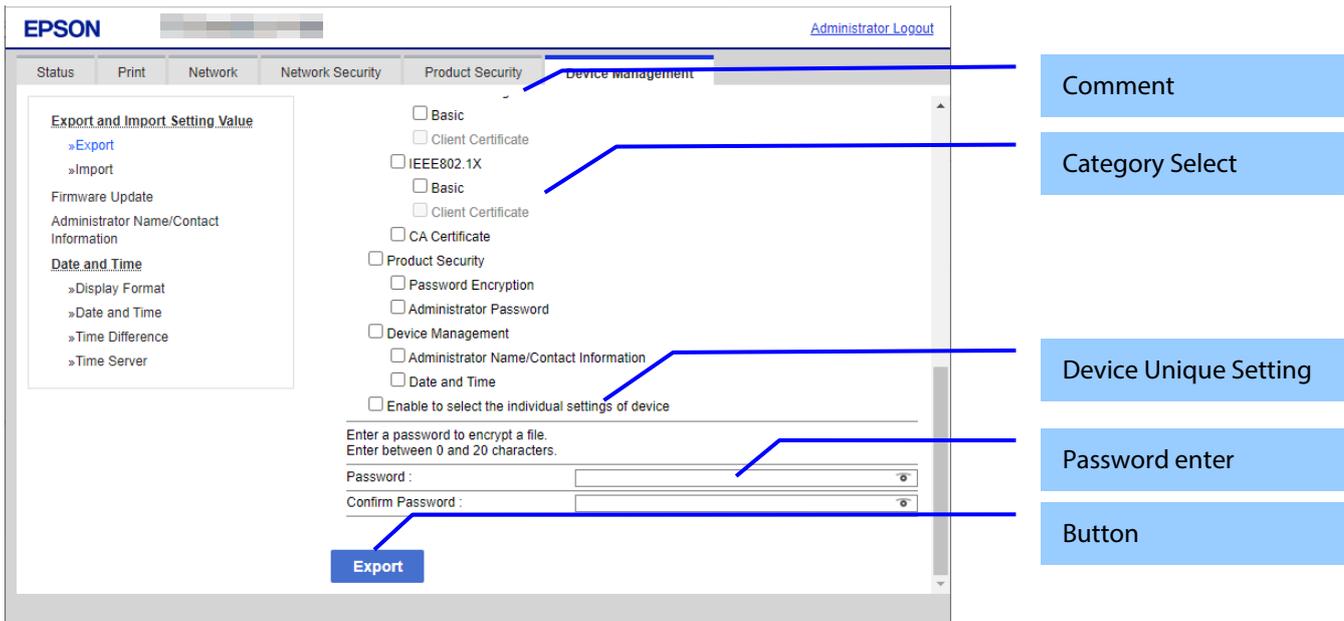


Figure 10-67 Top Page

10.6.1.2.1.2 Comment

The following table shows the layout for comments.

Table 10-210 Comment

Items	Description
"Select check box(es) of category to export. "	This is displayed above the category selection.
"Enter a password to encrypt a file. " "Enter between 0 and 20 characters. "	This is displayed above the field for entering the password. The minimum password length is shown below. Minimum Password Length setting value: Password Policy is enabled. 8 – 20: Password Policy is disabled and PSTI or RED is enabled. 0 – 20: Password Policy is disabled and PSTI and RED are disabled.

10.6.1.2.1.3 Category Select

This item is for checking the export categories. Selectable categories are shown in "Export/Import Category". No categories are selected at first. The following table shows the features of each export category.

Table 10-211 Features of Export Categories

Categories	Feature
Device Name Location	Check box is grayed-out, when "Enable to select the individual settings of device" is not checked. This item is displayed when "Obtain IP Address" is "Manual".
Obtain IP Address, IP Address, Subnet Mask, Default Gateway	
IPv6 Address, IPv6 Address Default Gateway	
Network Security Settings > SSL/TLS > Certificate	
Network Security Settings > IPsec/IP Filtering > Client Certificate Settings	
Network Security Settings > IEEE802.1X > Client Certificate Settings	
Network Security Settings > S/MIME > Client Certificate	
Bonjour Service Name	
SSID and Password	
Network Security Settings > S/MIME > Client Certificate	
Product Security > Password Encryption	Displayed only on models with software encryption enabled.

10.6.1.2.1.4 Device Unique Settings Select

The following table shows the description of items for which unique device settings can be selected.

Table 10-212 Device Unique Settings Select

Items	Description
"Enable to select the individual settings of device"	This setting allows the Unique Device Settings to be selected.

10.6.1.2.1.5 Password Enter

Enter a password for file encryption.

Table 10-213 Password Enter

Items	Description
"Password"	Use the text box to set a password for file encryption. 0 – 20 bytes in characters (ASCII 0x20 – 0x7E). The values are masked. The range is the minimum number displayed in the comment to a maximum of 20 characters.
"Confirm Password"	Same as the Encryption password.

10.6.1.2.1.6 Button

The following table shows the buttons on the page.

Table 10-214 Button

Items	Description
"Export"	If pressed, the printer starts to create an export file. If file creation fails, Web Config goes to the Result page. After it is pressed, all items on the top page are grayed-out.

When the "Export" button is pressed, the Web Config displays a pop-up window showing the following message if it recognizes an error in the entered value.

Table 10-215 Export Error Pop-up

Items	Description
"Select at least one category."	This message is shown when the category is not checked.
"Invalid value below."	Shows a warning when a value is entered incorrectly.
"Passwords you entered do not match."	When the password and the confirmation password do not match, this message is shown.

The default name of the downloaded file is in the format of "Config_<Serial Number>_<Date and Time>".

<Serial Number> is the Product's Serial Number.

<Date and Time> is the Date and Time set for the product.

10.6.1.2.2 Result Page

The Result page is shown if the file download fails.

Table 10-216 Export Result

Items	Description
"Creating a file failed." "Export the file again."	This message is shown if file creation fails.

10.6.1.3 Import

The Import page consists of a Top page, Category Select page, Confirmation page, and Result page.

10.6.1.3.1 Top Page

10.6.1.3.1.1 Image

When “Import” is chosen in the menu frame, the top page is displayed as shown below.

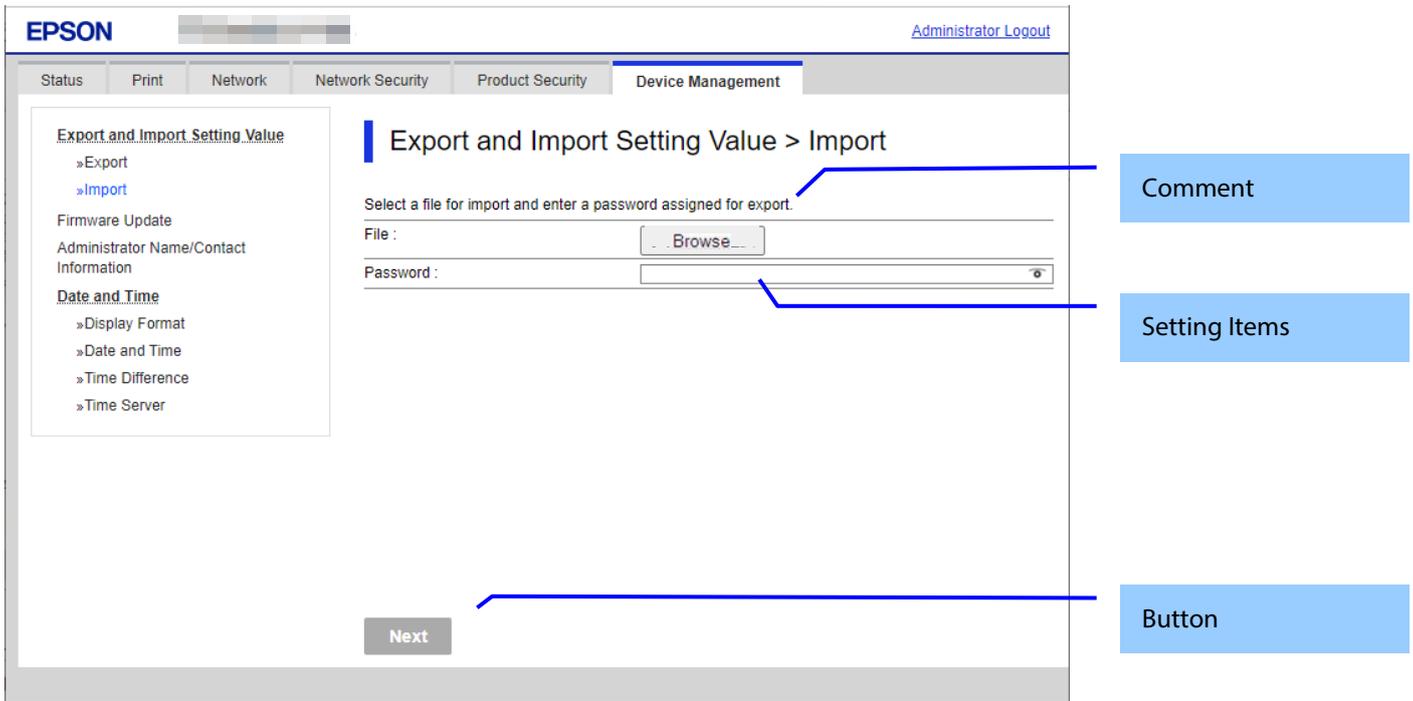


Figure 10-68 Top Page

10.6.1.3.1.2 Comment

The following table shows the comments.

Table 10-217 Comment

Items	Description	Condition
"Select a file for import and enter a password assigned for export. "	Displayed at the top of the page.	-
"Sending file. Please wait..."	Displayed above the next button.	Displayed after the next button is pressed.

10.6.1.3.1.3 Setting Items

The following table shows the layout of this settings area.

Table 10-218 Setting Items

Items	Description
"File"	The user can enter the import file. Use the file button to select a file.
"Password"	Use the text box to set a password for file decryption. 0 – 20 bytes in characters. (ASCII 0x20 – 0x7E) The values are masked.

10.6.1.3.1.4 Button

The following table shows the buttons on the page.

Table 10-219 Button

Items	Description	Condition
"Next"	If pressed, the Web Config makes transition to the Category Select page.If file analysis is failed, the Web Config makes transition to the Result page. After pressed, all items in top page are grayed-out.	This button is enabled only when an import file is selected.

When the “Next” button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value. All items are grayed out and comments are not displayed.

Table 10-220 Error Pop-up

Items	Description
"Invalid value below."	Shows a warning when a value is entered incorrectly.

10.6.1.3.2 Category Select Page

10.6.1.3.2.1 Image

When the file analysis has been done, the Web Config shows Category Select page. This page is as below.

Figure 10-69 Category Select page

10.6.1.3.2.2 Comment

The following table shows the layout for comments.

Table 10-221 Comment

Comment	Description	Condition
"Select check box(es) of category to import."	This is displayed above the category selection.	-
"The symbols indicate as follows:" "! : Some items in a category cannot be imported."	This is displayed above the category selection.	-

10.6.1.3.2.3 Category Select

No categories are selected at first. The following table shows the features of each import category

Table 10-222 Features of Import Categories.

Category	Feature
All Categories	The check box is enabled only when the import file includes settings. "!" is displayed in front of a category if some of the settings in that category are not imported.
Device Name	Check box is grayed-out, when "Enable to select the individual settings of device" is not checked. This item is grayed-out if setting data is not contained in the import file.
Location	
Obtain IP Address, IP Address, Subnet Mask, Default Gateway	Check box is grayed-out, when "Enable to select the individual settings of device" is not checked. This item is not displayed when "Obtain IP Address" is "Auto". This item is grayed-out if setting data is not contained in the import file.
IPv6 Address, IPv6 Address Default Gateway	Check box is grayed-out, when "Enable to select the individual settings of device" is not checked. This item is grayed-out if setting data is not contained in the import file.
Network Security Settings > SSL/TLS > Certificate	
Network Security Settings > IPsec/IP Filtering > Client Certificate Settings	
Network Security Settings > IEEE802.1X > Client Certificate Settings	
Bonjour Service Name	
SSID and Password	
Network Settings > LDAP Network Settings > Kerberos	When Kerberos settings are imported into a device with independent Kerberos settings and LDAP settings from a device on an LDAP server, the Kerberos settings are imported to Kerberos 1. Conversely, Kerberos 1 settings are imported to LDAP.
Network Security Settings > IPsec/IP Filtering > Basic	When importing from a model with few setting items, missing items are set to their default values. Items that are grayed out and items with different IKE versions are not overwritten.
Network Security Settings > IEEE802.1X > Basic	When importing from a model with few setting items, missing items are set to their default values.
Network Security Settings > S/MIME > Certificate	Since it is linked with the mail server settings, it is not included in the unique model settings.
Product Security > Password Encryption	Displayed only on models with software encryption enabled.

10.6.1.3.2.4 Device Unique Settings Select

The following table shows the description of items for which unique device settings can be selected.

Table 10-223 Device Unique Settings Select

Items	Description	Condition
"Enable to select the individual settings of device"	This setting allows the Unique Device Settings to be selected.	Grayed-out if import file does not contain unique device settings

10.6.1.3.2.5 Button

The following table shows the buttons on the page.

Table 10-224 Button

Items	Description
"Next"	If pressed, Web Config goes to the Confirmation page. If S/MIME certificate and mail server settings are not selected at the same time on a model that supports S/MIME, the following pop-up is displayed. " - You need to select both S/MIME certificate and email server settings. The S/MIME signature setting automatically becomes [Do not add signature] and the S/MIME certificate is deleted. ¶n Do you want to continue? " However, if only the client certificate is imported, it is processed as if an inconsistency has occurred.
"Back"	If pressed, Web Config goes to the Top page.

When the "Next" button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-225 Error Pop-up

Items	Description
"Select at least one category. "	This message is shown when the category is not checked.

Table 10-226 Pop-Up

Items	Description
"By using the firmware, you agree to the End User License Agreement. FOR USERS IN THE UNITED STATES, YOU AGREE TO IMPORTANT LEGAL TERMS AND CONDITIONS, INCLUDING A CLASS ACTION WAIVER AND ARBITRATION. PLEASE READ CAREFULLY: https://support.epson.net/eula/ Agree? "	This message is shown when the category is not checked.

10.6.1.3.3 Confirmation Page

10.6.1.3.3.1 Image

The page is shown when “Next” on the previous page is pressed.

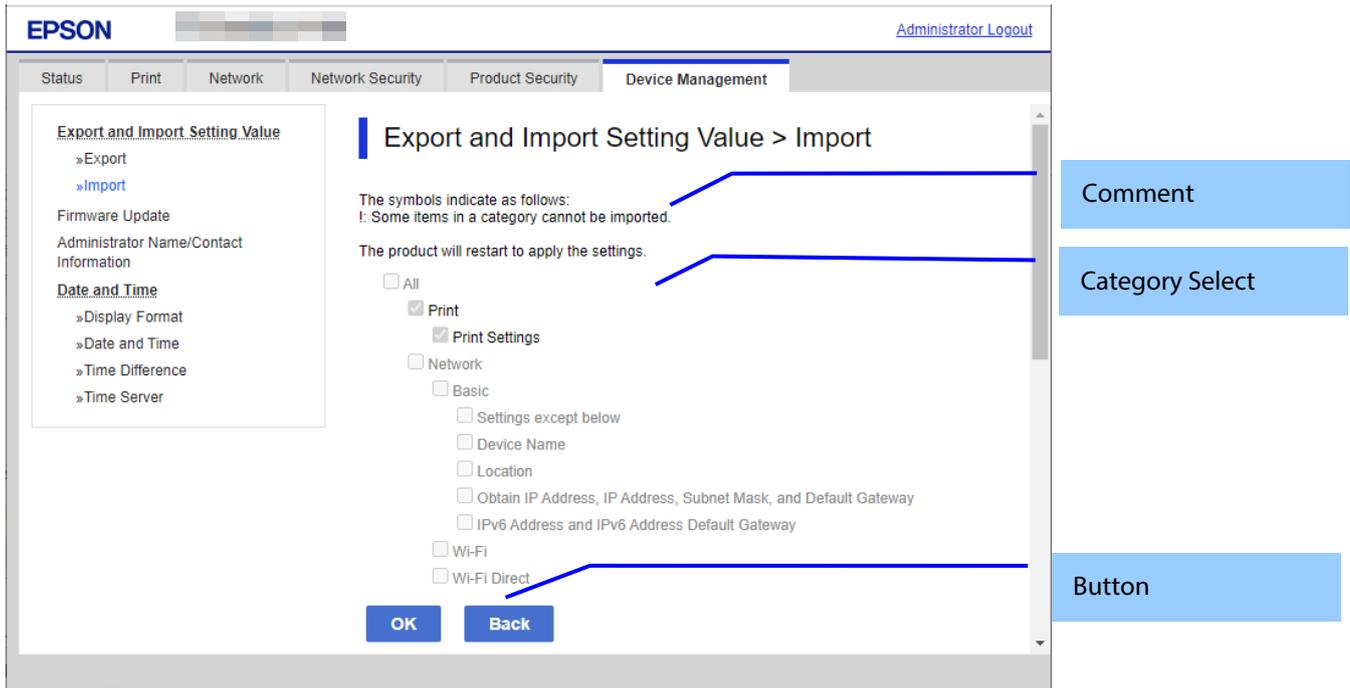


Figure 10-70 Confirmation Page

10.6.1.3.3.2 Comment

The following table shows the layout for comments.

Table 10-227 Comment

Comment	Description	Condition
"The symbols indicate as follows: " "!: Some items in a category cannot be imported."	This is displayed above the category selection.	-
"Communication will be shut down temporarily to enable the new settings. You cannot access the network immediately after the settings are changed."	Displayed above category selection.	Displayed when "Print Settings" is not checked on the category selection page.
"Product will be restarted to apply the settings."	Displayed above category selection.	Displayed when "Print Settings" is checked on the category selection page.

10.6.1.3.3.3 Category Confirm

The category information that was entered on the previous page is shown. Categories that weren't selected are grayed out.

10.6.1.3.3.4 Button

The following table shows the button on the page.

Table 10-228 Button

Items	Description
"OK"	If pressed, Web Config goes to the Result page.
"Back"	If pressed, Web Config goes to the Category Select page.

10.6.1.3.4 Result Page

10.6.1.3.4.1 Result

The content of the Result page will vary based on the result.

Table 10-229 Result

Items	Description	Condition
"Setup complete." "Restarting communication may take a few minutes." "If you want to change the settings, close the Web Config and check your IP address. Then enter your IP address in the browser to restart the Web Config."	This message is shown when the settings are completed. The network shuts down for updating.	Displayed when "Print Settings" is not checked on the category selection page.
"Setup complete." Restarting communication may take a few minutes. If you want to change the settings, reconnect to the Web Config."	This message is shown when the settings are completed. The network shuts down for updating.	Displayed when "Print Settings" is checked on the category selection page.
"Setup complete. "	This message is shown when the settings are completed. The network does not shut down.	
"Setup failed. "	This message is shown when the settings are failed or import file was changed. When the device is interrupting mode, the settings are failed.	
"Loading file failed. " "Check if the file and password are correct and then import the file again. "	This message is shown when file is not correct or password is not correct.	

10.6.2 Firmware Update

10.6.2.1 Top Page

10.6.2.1.1 Image

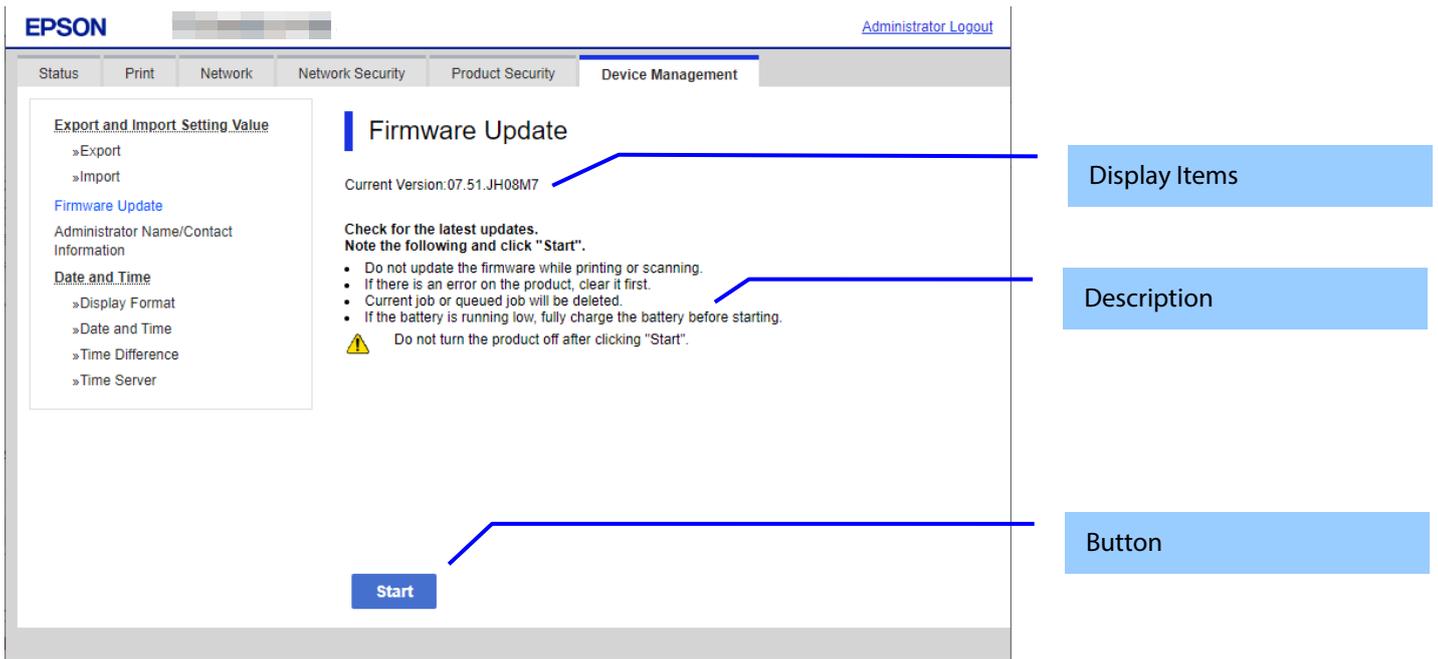


Figure 10-71 Top Page

10.6.2.1.2 Display Items

Table 10-230 Display Items

Items	Description
"Current Version"	Up to 12 characters in ASCII codes XX.YY.ZZZZZZ -XX: Linux Kernel version -YY: Linux Appli version -ZZZZZ: Main version

10.6.2.1.3 Description

Table 10-231 Description

Items	Description	Condition
"Check for the latest updates."	Fixed Strings	-
"Note the following and click "Start"."	Fixed Strings	-
"Do not update the firmware while printing or scanning."	Fixed Strings	-
"If there is an error on the product, clear it first."	Fixed Strings	-
"Remove the roll paper if loaded."	Fixed Strings	This message is shown on destinations with Roll Paper Feed.
"Current job or queued job will be deleted."	Fixed Strings	-
"If the battery is low, charge it before starting."	Fixed Strings	This message is shown on models that is installed battery.
"Do not turn the product off after clicking "Start"."	Fixed Strings ! icon is shown in front of the string.	-

10.6.2.1.4 Button

Table 10-232 Button

Items	Description
"Start"	The button to Firmware search page.

10.6.2.2 Firmware Search Process Page

The page is shown after the 'Start' button is pressed.
The following figure shows a layout of the Firmware search process page.

10.6.2.2.1 Image

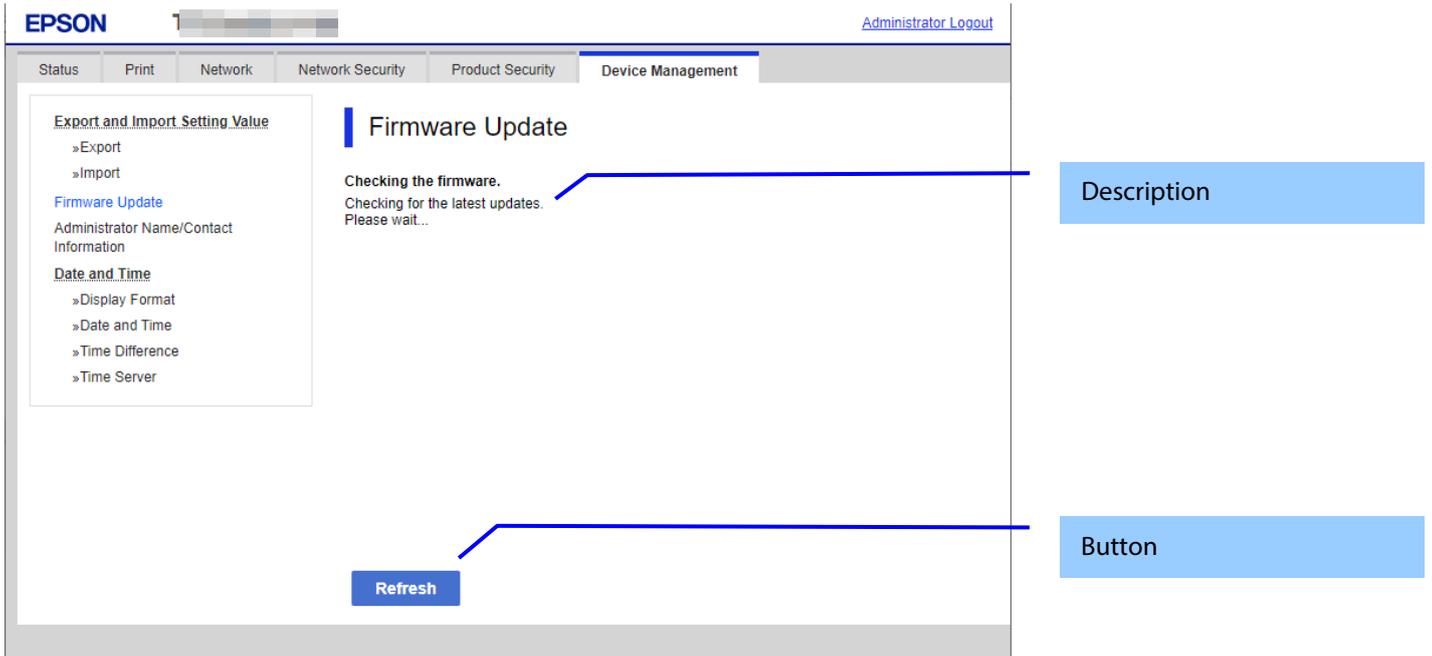


Figure 10-72 Firmware Search Process Page

10.6.2.2.2 Description Items

Table 10-233 Description

Items	Description
"Checking the firmware." "Checking for the latest updates.¥n Please wait..."	Fixed Strings

10.6.2.2.3 Button

Table 10-234 Button

Items	Description
"Refresh"	The button on bottom of the main frame to refresh the page. If you click, the page is refreshed.

10.6.2.3 Before Update Confirm Page

The page is shown if new firmware is found.
The following figure shows a layout of the Before update confirm page.

10.6.2.3.1 Image

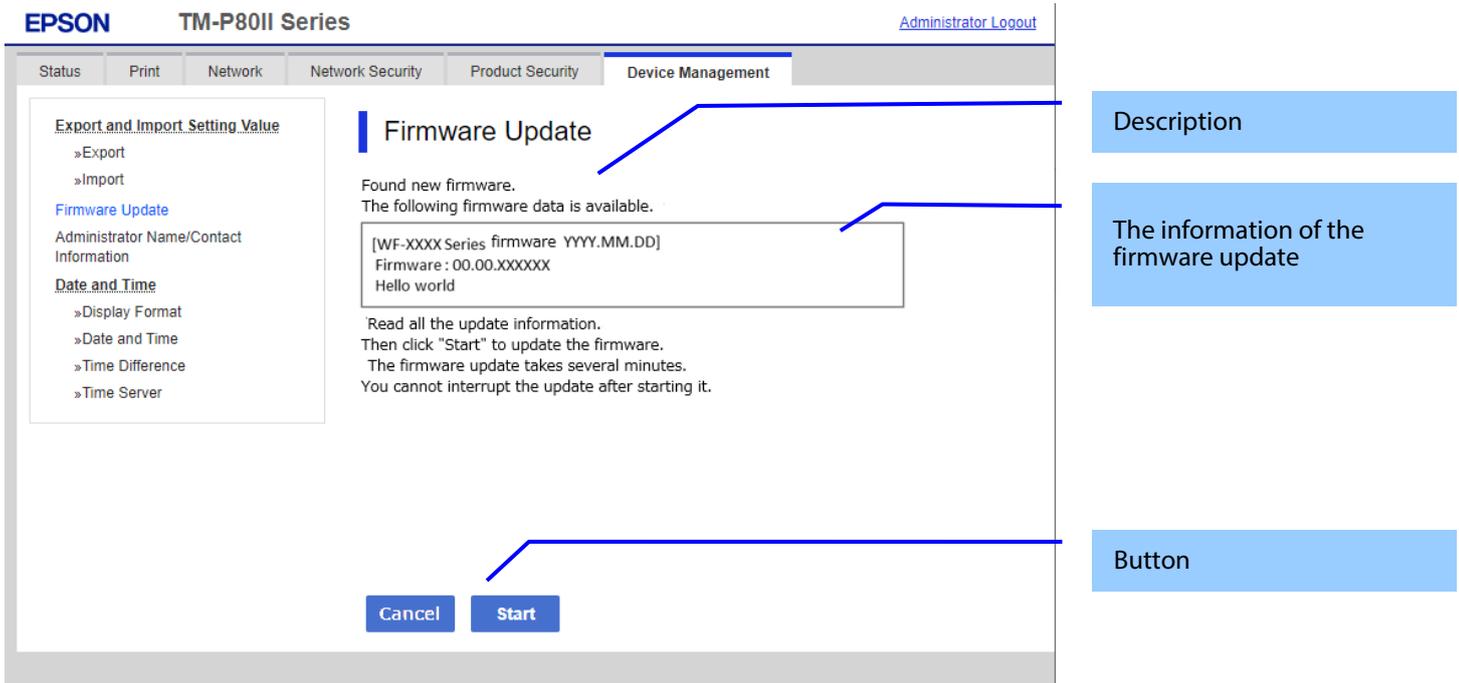


Figure 10-73 Before Update Confirm Page

10.6.2.3.2 Description

Table 10-235 Description

Items	Description
"Found new firmware." "The following firmware data is available."	Fixed Strings
"Access below URL for check update details." "https://epson.sn/eui/"	Fixed strings. Displayed under the information for the firmware update. This is displayed for RED-compliant printers. A URL is displayed with a link.
"Read all the update information.¥n Then click "Start" to update the firmware." "The firmware update takes several minutes.¥n You cannot interrupt the update after starting it."	Fixed Strings
"By using the firmware, you agree to the End User License Agreement. FOR USERS IN THE UNITED STATES, YOU AGREE TO IMPORTANT LEGAL TERMS AND CONDITIONS, INCLUDING A CLASS ACTION WAIVER AND ARBITRATION. PLEASE READ CAREFULLY: https://support.epson.net/eula/"	EULA
"Accept"	Check box. When this item is checked then "Start" button is enable.

10.6.2.3.3 The Information of the Firmware Update

Table 10-236 The Information of the Firmware Update

Items	Description
Product name and release date.	Up to 10 characters in ASCII codes YYYY.MM.DD
Firmware	Up to 12 characters in ASCII codes XX.YY.ZZZZZZ -XX: Linux Kernel version -YY: Linux Appli version -ZZZZZ: Main version
Description	Up to 1024 bytes in UTF-8

10.6.2.3.4 Button

Table 10-237 Button

Items	Description
"Cancel"	If you click, Firmware update is canceled.
"Start"	If you click, Firmware update is started.

10.6.2.4 Cancel Process Page

10.6.2.4.1 Image

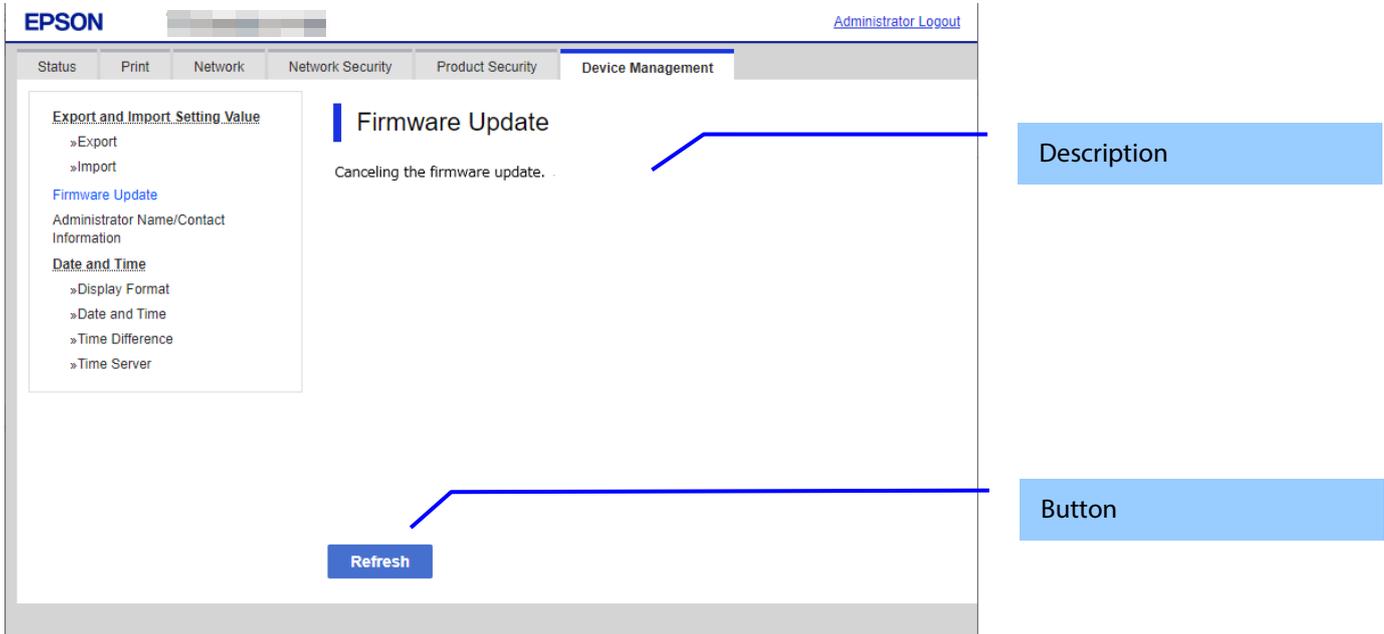


Figure 10-74 Cancel Process Page

10.6.2.4.2 Description

Table 10-238 Description

Items	Description
"Canceling the firmware update."	Fixed Strings

10.6.2.4.3 Button

Table 10-239 Button

Items	Description
"Refresh"	The button on bottom of the main frame to refresh the page. If you click, the page is refreshed.

10.6.2.5 Result Page

10.6.2.5.1 Image

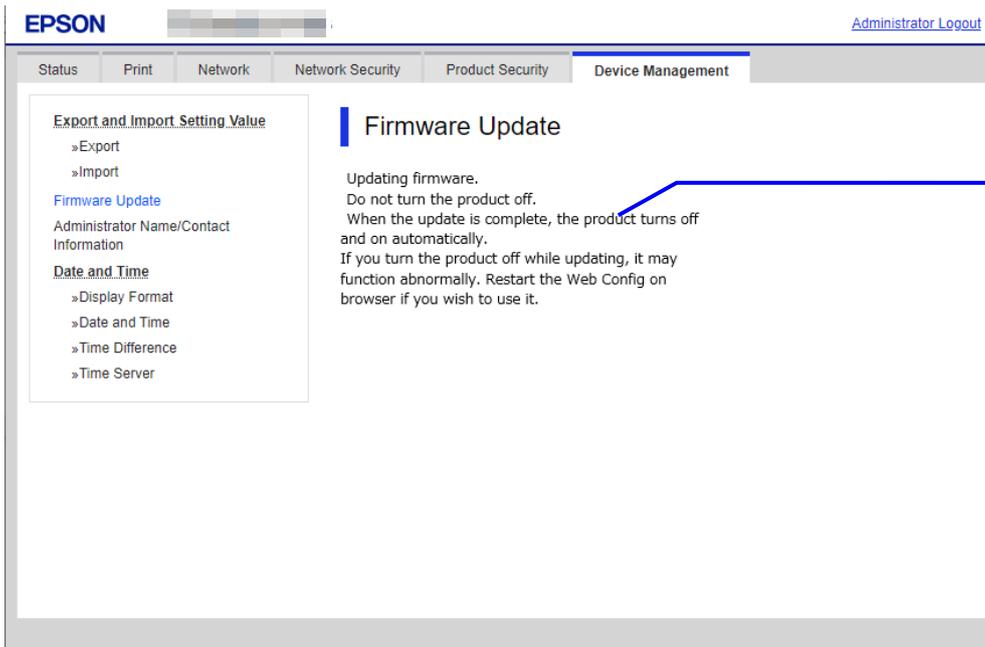


Figure 10-75 Result Page

10.6.2.5.2 Setting Result

Table 10-240 Result

Items	Description
"Updating firmware." "Do not turn the product off." "When the update is complete, the product turns off and on automatically.¥ If you turn the product off while updating, it may function abnormally. Restart the Web Config on browser if you wish to use it."	This message is shown when Firmware update is started successfully. ! icon is shown in front of "Do not turn the product off."
"The firmware update was canceled."	This message is shown when Firmware update is canceled successfully.
"You have the latest firmware."	This message is shown when the current version of the firmware is latest.
"Cannot connect to the Epson server."	This message is shown when the printer could not access to the server. The X icon is shown in front of the string.
"Cannot update the firmware." "Quit printing or scanning." "Remove the roll paper if loaded." "When an error message appears on the screen or status lights indicate an error, solve the problem." "Note: There might be an error regarding the consumables such as ink supply units." "Connect an AC adapter if not connected." "Remove the memory card." "If the problem is not solved, close the Web browser and then launch it."	This message is shown when the printer cannot update the firmware. The X icon is shown in front of "Cannot update the firmware." "Remove the roll paper if loaded." is shown on destinations with Roll Paper Feed.
"The operation failed." "Another computer may be communicating with the product."	This message is shown when another computer may be communicating with the product. The X icon is shown in front of "The operation failed."
"Cannot update the firmware." "Low battery. Connect to a power source."	This message is shown when cannot be executed because the power is not connected and the battery level is low. The X icon is shown in front of "Cannot update the firmware."

10.6.3 Administrator Name / Contact Information

In this area, the user can set the contact information for the administrator.

10.6.3.1 Top Page

10.6.3.1.1 Image

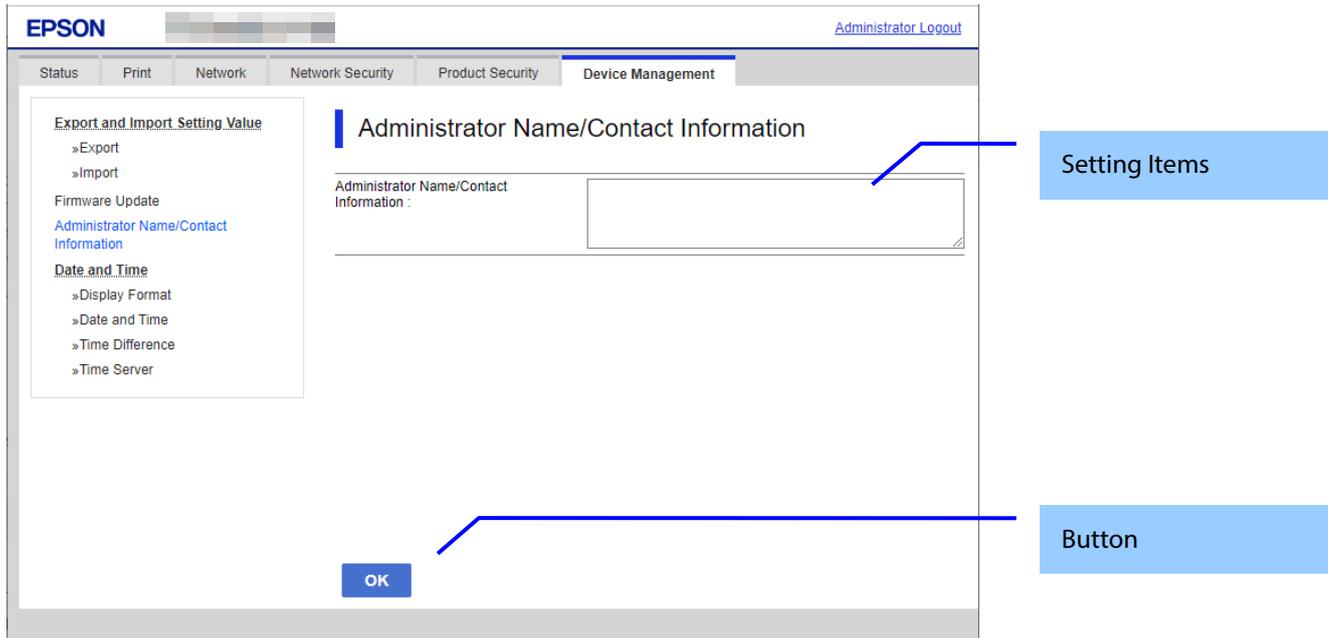


Figure 10-76 Contact Information Settings

10.6.3.1.2 Setting Items

The following table shows the items on the page..

Table 10-241 Setting Items

Items	Description
"Administrator Name/Contact Information"	UTF-8: 0 ~ 255Byte Text box for entering contact information Usable string: UTF-8 code, Max. of 255 bytes.

10.6.3.1.3 Button

The following table shows the buttons on the page.

Table 10-242 Button

Items	Description
"OK"	Button at the bottom of the main frame

10.6.3.2 Result Page

The result message is shown in the main frame or in an error pop-up after the "OK" button is pressed.

10.6.3.2.1 Result

Table 10-243 Result

Items	Description
"Setup complete."	This message is shown when the settings are completed.
"Setup failed."	This message is shown if setup fails.
"Invalid value below." " – Administrator Name/Contact Information"	Shows an error pop-up when a value is entered incorrectly.

10.6.4 Date and Time

In the settings area, you can set the date and time supported by the printer. You can also change the settings related to the NTP server.

Table 10-244 Sub menu of Date and Time

Sub menu	Condition
"Display Format"	-
"Date and Time"	-
"Time Difference"	-
"Time Server"	Only printers that support NTP

10.6.4.1 Display Format

The following figure shows the layout of this settings area.

10.6.4.1.1 Top Page

10.6.4.1.1.1 Image

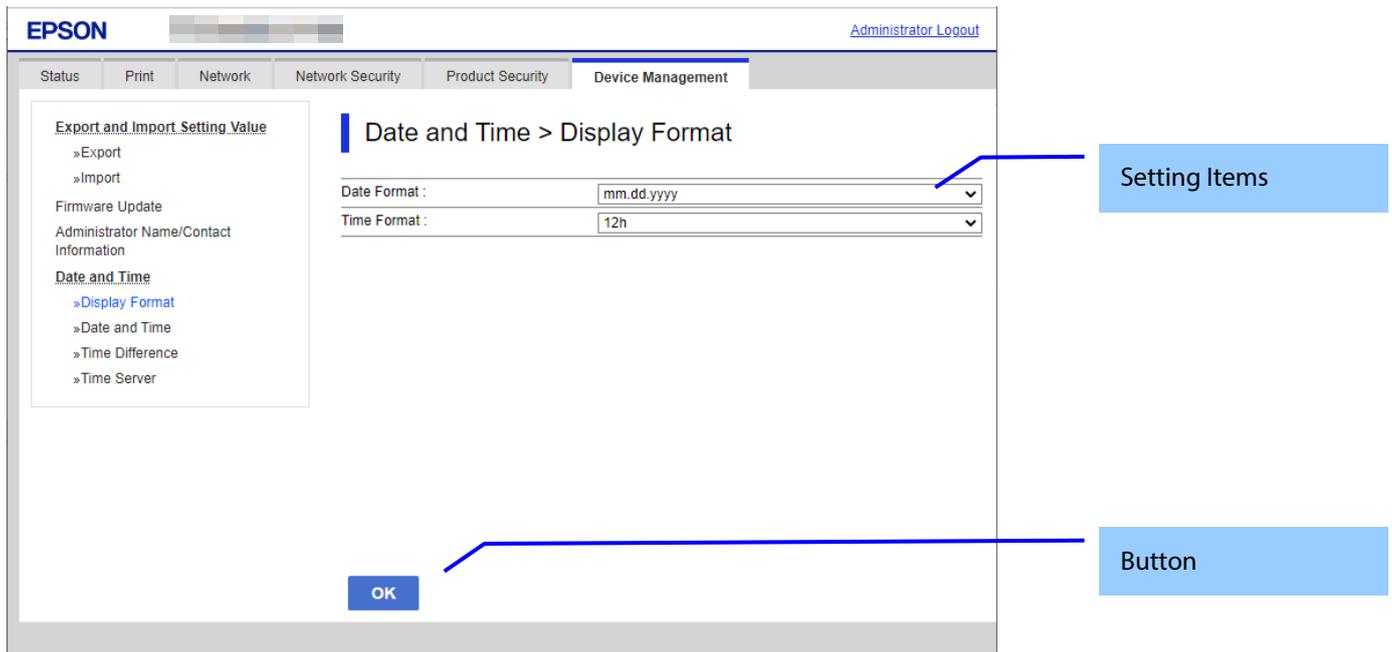


Figure 10-77 Display Format Settings

10.6.4.1.1.2 Setting Items

Table 10-245 Items in the Display Format Settings

Items	Description
"Date Format"	Use the drop-down list to change the display format for date. "yyyy.mm.dd" "mm.dd.yyyy" "dd.mm.yyyy"
"Time Format"	Use the drop-down list to select one of the following. "12h" / "24h"

10.6.4.1.1.3 Button

The following table shows the button on the page.

Table 10-246 Button

Items	Description
"OK"	-Button at the bottom of the main frame to perform settings.

10.6.4.1.2 Result Page

The result message is shown in the main frame after the “OK” button is pressed.

10.6.4.1.2.1 Image

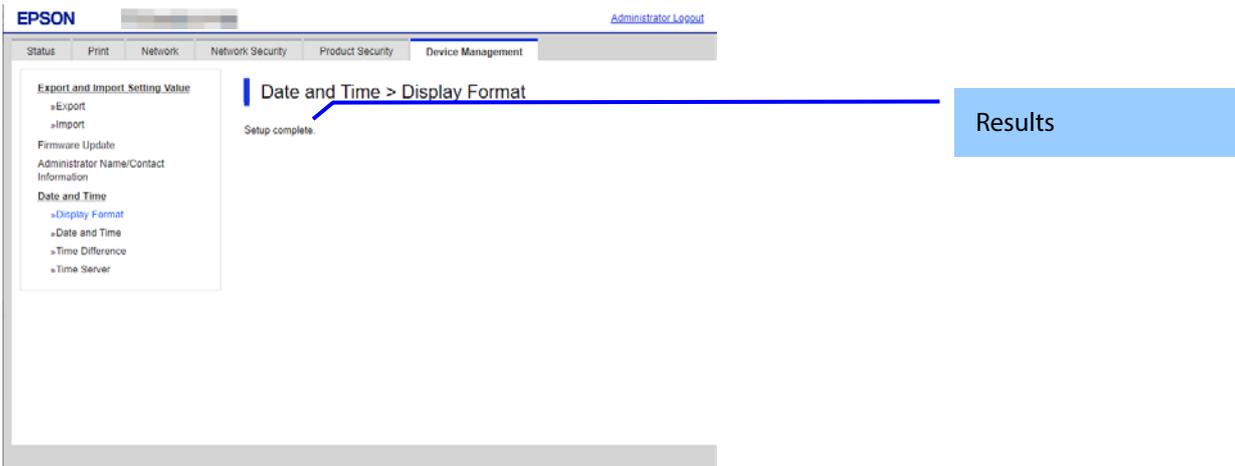


Figure 10-78 Result Page

10.6.4.1.2.2 Result

Table 10-247 Results

Items	Description
"Setup complete"	This message is shown when the settings are completed.
"Setup failed"	This message is shown if the settings fail.

10.6.4.2 Date and Time

10.6.4.2.1 Top Page

10.6.4.2.1.1 Image

The screenshot shows the EPSON Device Management web interface. The top navigation bar includes 'Status', 'Print', 'Network', 'Network Security', 'Product Security', and 'Device Management'. The left sidebar contains a tree view with 'Date and Time' selected. The main content area is titled 'Date and Time > Date and Time' and contains the following settings:

- Year: 2021
- Month: 1
- Day: 1
- AM/PM: AM
- Hour: 6
- Minute: 55

A 'Retrieve Information' button is located below the input fields. A note at the bottom states: 'Note: Depending on the network or device, there may be a short delay before the setting is applied.' An 'OK' button is at the bottom left. Two blue callout boxes are present: one pointing to the input fields labeled 'Setting Items' and another pointing to the 'Retrieve Information' button labeled 'Button'.

Figure 10-79 Date and Time settings

10.6.4.2.1.2 Setting Items

The following table shows the items on the page.

Table 10-248 Setting Items

Items	Description	Condition
"Year"	Text box for entering a year. Four digits. (20XX-2099). XX: Indicates the product's launch year.	-
"Month"	Text box for entering the month(1-12)	-
"Day"	Text box for entering the date (1-31)	-
"AM/PM"	Use the drop-down list to select one of the following. "AM" / "PM"	Can be use this settings if the "Time Format" setting is "24h".
"Hour"	Text box for entering time in hours If the time fomat is 24h: (0-23) If the time fomat is 12h: (0-11)	-
"Minute"	Text box for entering minutes.(0-59)	-
"You can retrieve date and time information from this computer or mobile device."	Description of "Retrieve Information" button.	
"Note: Depending on the network or device, there may be a short delay before the setting is applied."	Fixed message	-

10.6.4.2.1.3 Button

The following table shows the buttons on the page.

Table 10-249 Button

Items	Description
"Retrieve Information"	You can retrieve date and time information from this computer or mobile device.
"OK"	-Button at the bottom of the main frame to perform settings.

When the "OK" button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-250 Error Pop-up

Items	Description
"Invalid value below." "-Year""-Month""-Day""-Hour""-Minute"	Shows a warning when a value is entered incorrectly. If "-Year" or "-Month" is not entered, "-Day" is not verified.

10.6.4.2.2 Result Page

The following result is shown in the main frame after the "OK" button is pressed.

10.6.4.2.2.1 Image

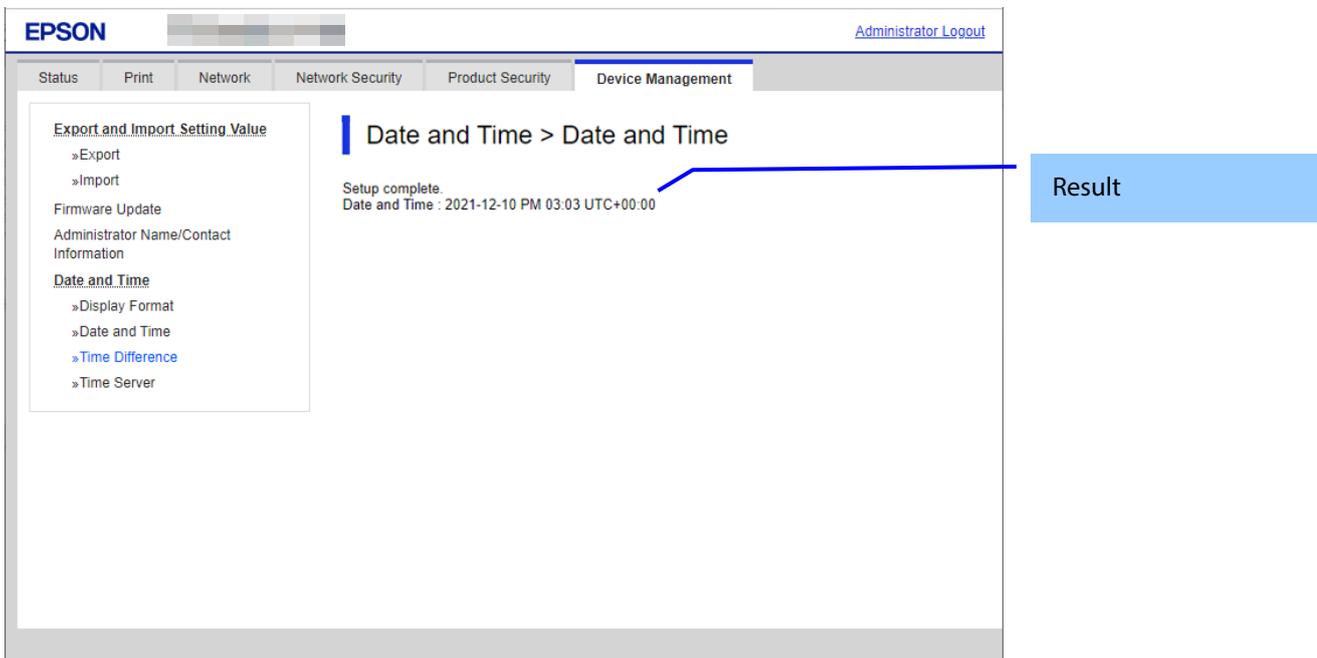


Figure 10-80 Result Page

10.6.4.2.2.2 Result

Result is below.

Table 10-251 Result

Items	Description	Condition
"Setup complete"	This message is shown when the settings are completed.	-
"Setup failed"	This message is shown if the settings fail.	-
"Date and Time"	The current date and time are displayed in the specified format.	When successful

10.6.4.3 Time Difference

10.6.4.3.1 Top Page

10.6.4.3.1.1 Image

The following figure shows the layout of this settings area.

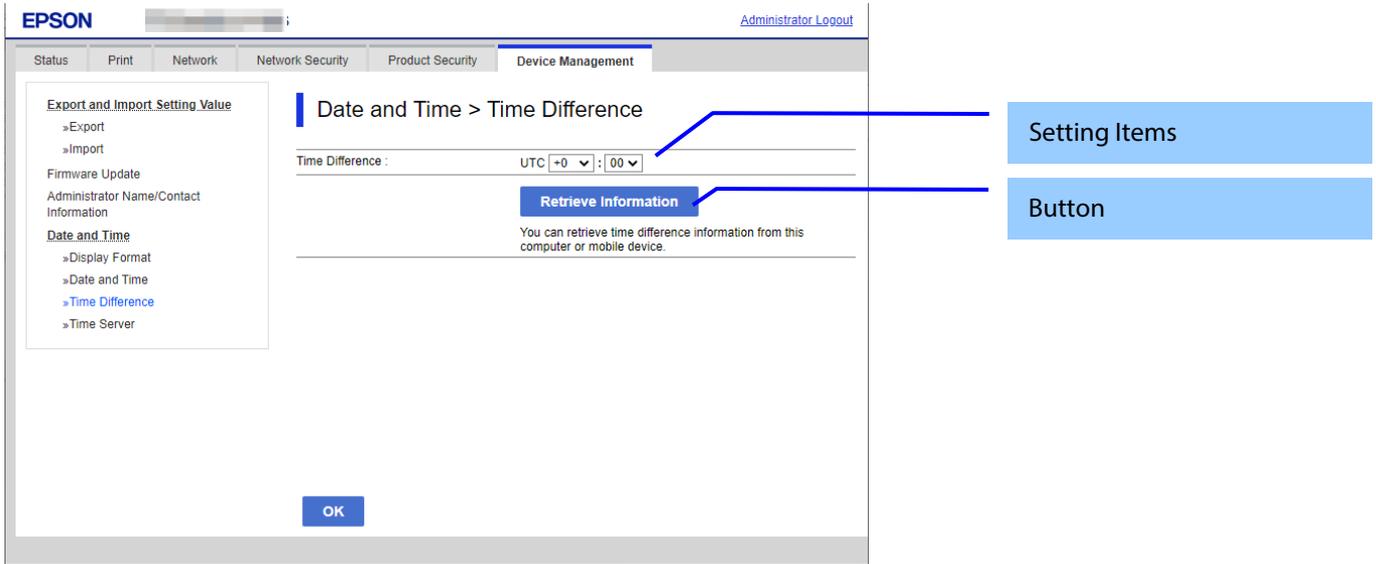


Figure 10-81 Time Difference

10.6.4.3.1.2 Setting Items

The following table shows the items on the page.

Table 10-252 Setting Items

Items	Description
"Daylight Saving Time"	Use the radio buttons to change summer time setting. <EAI> "Winter" / "Summer" <Euro> "OFF" / "ON"
"Time Difference"	Use the drop-down list to set the time difference. HH indicates the hour, and can be configured from -12 to +13. You can also select "+0" and "-0". MM indicates minutes, which can be set to 00, 15, 30 or 45. "0:00" is displayed as "+0:00".
"You can retrieve time difference information from this computer or mobile device."	Description of "Retrieve Information" button.

10.6.4.3.1.3 Button

The following table shows the buttons on the page.

Table 10-253 Button

Items	Description
"Retrieve Information"	You can retrieve time difference information from this computer or mobile device.
"OK"	-Button at the bottom of the main frame to perform settings.

10.6.4.3.2 Result Page

The result message is shown in the main frame after the “OK” button is pressed.

10.6.4.3.2.1 Image

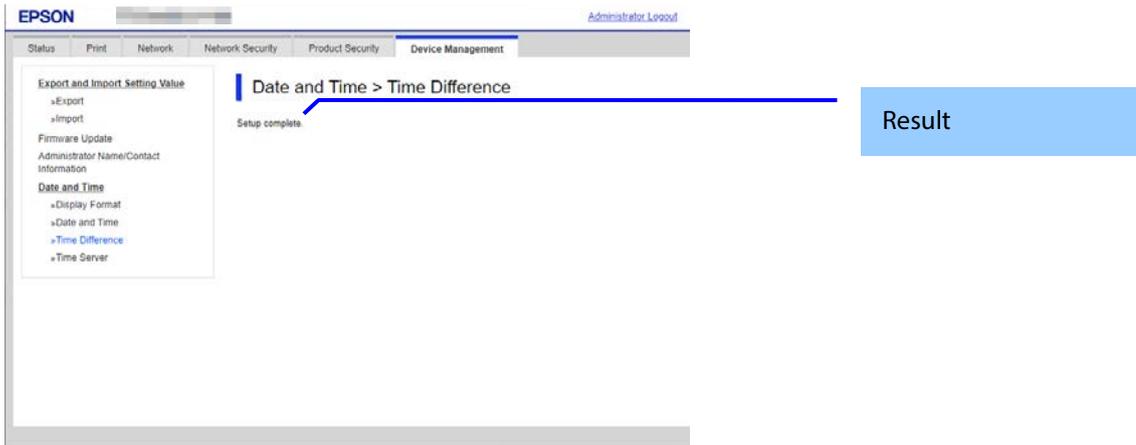


Figure 10-82 Result Page

10.6.4.3.2.2 Result

Table 10-254 Results

Items	Description
"Setup complete"	This message is shown when the settings are completed.
"Setup failed"	-This message is shown if the settings fail.

10.6.4.4 Time Server

10.6.4.4.1 Models that Support Node.js

10.6.4.4.1.1 Top Page

10.6.4.4.1.1.1 Image

The following figure shows the layout of this settings area.

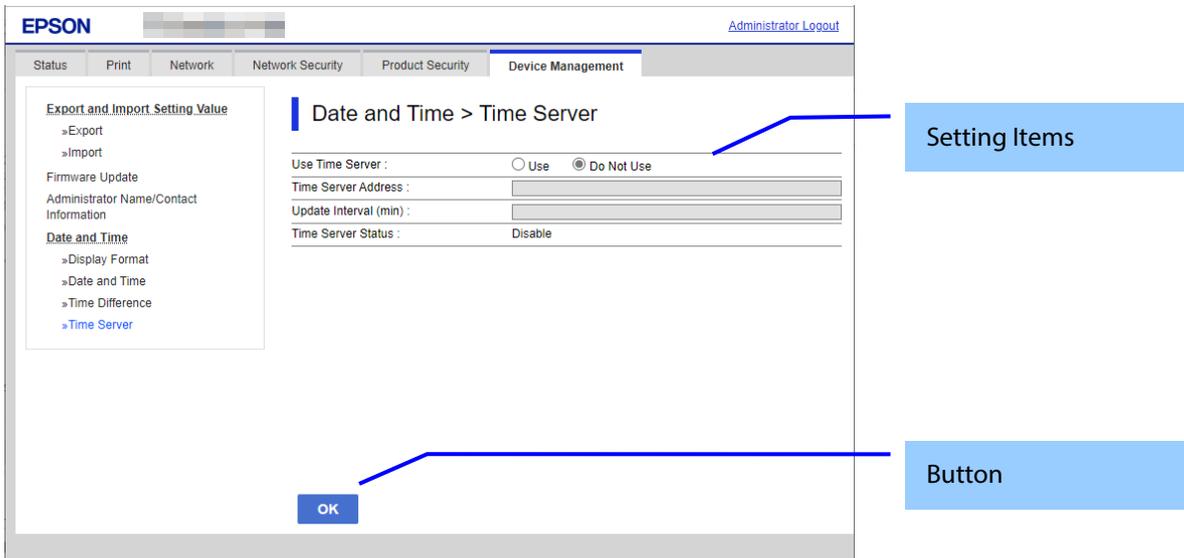


Figure 10-83 Time Server Settings

10.6.4.4.1.1.2 Setting Items

The following table shows the items on the page.

Table 10-255 Time Server Settings

Items	Description	Condition
"Use Time Server"	You can choose whether to use a time server. "Use" / "Do Not Use"	-
"Time Server Address"	Enter an NTP server address by IP address or FQDN.	Enabled if "Use" is chosen in "Use Time Server"
"Update Interval (min)"	Set the interval for updating the time on the printer.	Enabled if "Use" is chosen in "Use Time Server"
"Time Server Status"	Shows the latest connection status between the printer and the server. "Completed synchronizing" / "Synchronizing" / "Failed to synchronize" / "Disable"	Enabled if "Use" is chosen in "Use Time Server"

10.6.4.4.1.1.3 Button

The following table shows the buttons on the page.

Table 10-256 Button

Items	Description
"OK"	- Button at the bottom of the main frame for configuring settings.

When the "OK" button is pressed, Web Config displays a pop-up window with the following message if it recognizes an error in the entered value.

Table 10-257 Error Pop-up

Items	Description
"Invalid value below." "-Time Server Address" "-Update Interval(min)"	Shows a warning when a value is entered incorrectly.

10.6.4.4.2 Progress Page

The progress page indicating a sandglass is shown in the beginning when the Start button is pressed. On the progress page, the Web Config checks to see if the Refresh button is pressed and if the setup is completed periodically and makes transition to the Results page if the setup is completed or remains the current page if the setup has not been completed.

10.6.4.4.2.1 Image

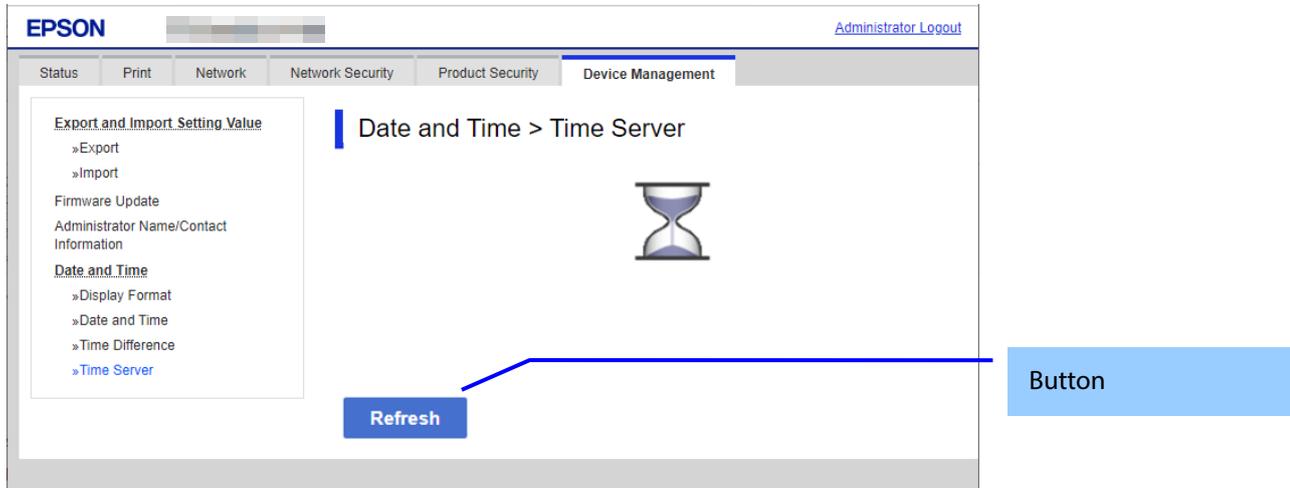


Figure 10-84 Progress Page

10.6.4.4.2.2 Button

Table 10-258 Button

Items	Description
"Refresh"	The button on bottom of the main frame to refresh the page.

10.6.4.4.3 Result Page

As soon as the result is determined, the following result message is shown in the main frame.

10.6.4.4.3.1 Image

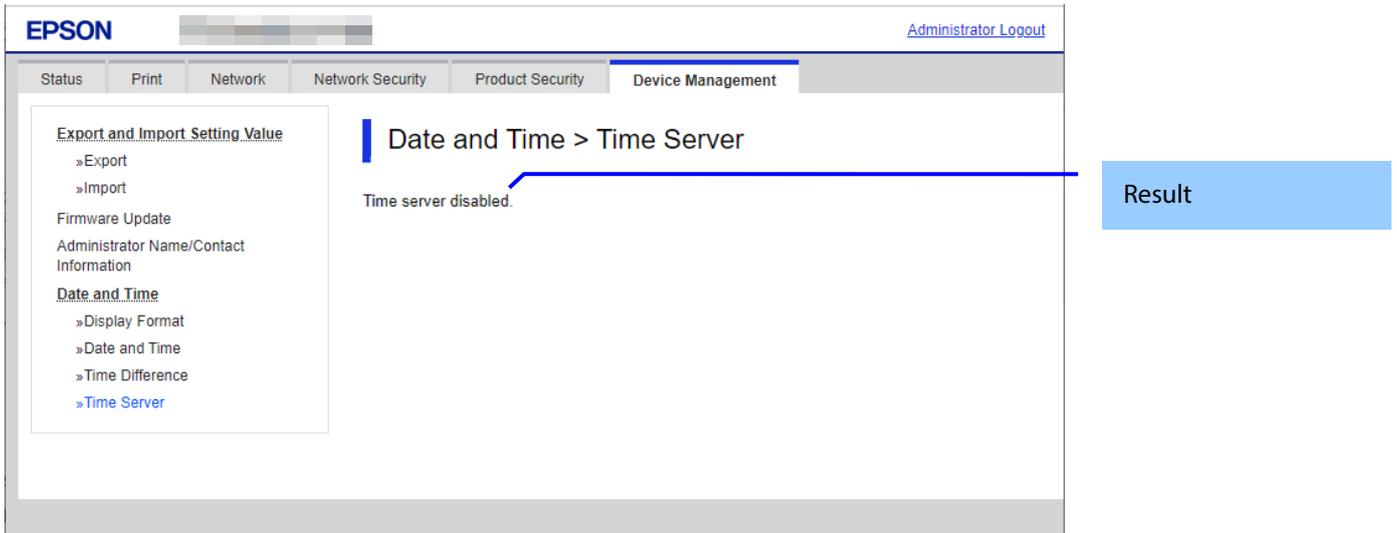


Figure 10-85 Result Page

10.6.4.4.3.2 Setting Result

The result is shown below.

Table 10-259 Result

Items	Description	Condition
"Setup complete"	This message is shown when the settings are completed.	-
"Connection failed" "Check the settings"	This message is shown if the connection fails.	-
"Time server disabled"	This This message is shown if you disable the server.	-
"Cannot access the product until processing is complete."	This message is shown if the settings cannot be configured because the device is busy.	-
"Date and Time"	Shows the current date and time in the stipulated display format	If succeed

10.6.4.4.4 Models that Do Not Support Node.js

10.6.4.4.4.1 Top Page

10.6.4.4.4.1.1 Image

The following figure shows a layout of this settings area.

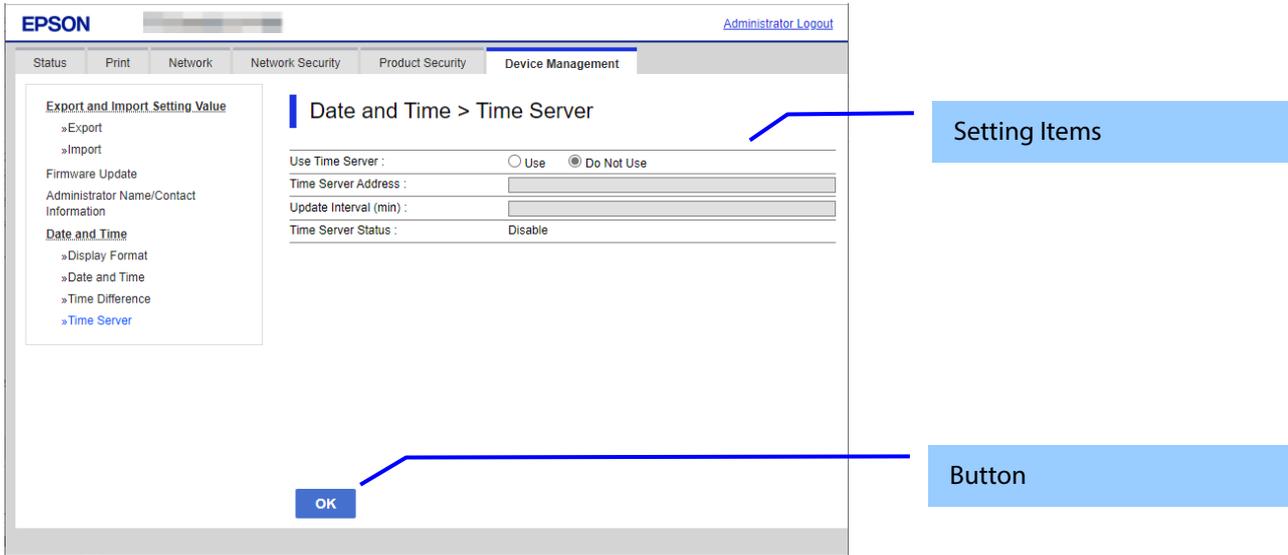


Figure 10-86 Time Server Settings

10.6.4.4.4.1.2 Setting Items

The following table shows the items on the page.

Table 10-260 Time Server Settings

Items	Description	Condition
"Use Time Server"	You can choose whether to use the time server. "Use" / "Do Not Use"	-
"Time Server Address"	You can input the NTP server address by IP address or FQDN.	Enabled if "Use" is chosen in "Use Time Server"
"Update Interval (min)"	You can set the interval for updating of the printer.	Enabled if "Use" is chosen in "Use Time Server"
"Time Server Status"	Shows the status of the most recent connection between the printer and the server. "Completed synchronizing"/"Synchronizing" /"Failed to synchronize" / "Disable"	Enabled if "Use" is chosen in "Use Time Server"

10.6.4.4.4.1.3 Button

The following table shows the button on the page.

Table 10-261 Button

Items	Description
"OK"	Button on the bottom of the main frame to perform setting.


When the "OK" button is pressed, the Web Config displays a pop-up window showing the following message if it recognizes an error in the input value.

Table 10-262 Error Pop-up

Items	Description
"Invalid value below." "-Time Server Address" "-Update Interval(min)"	Shows a warning with the items of the incorrectly input value.

10.6.4.4.2 Result Page

10.6.4.4.2.1 Image

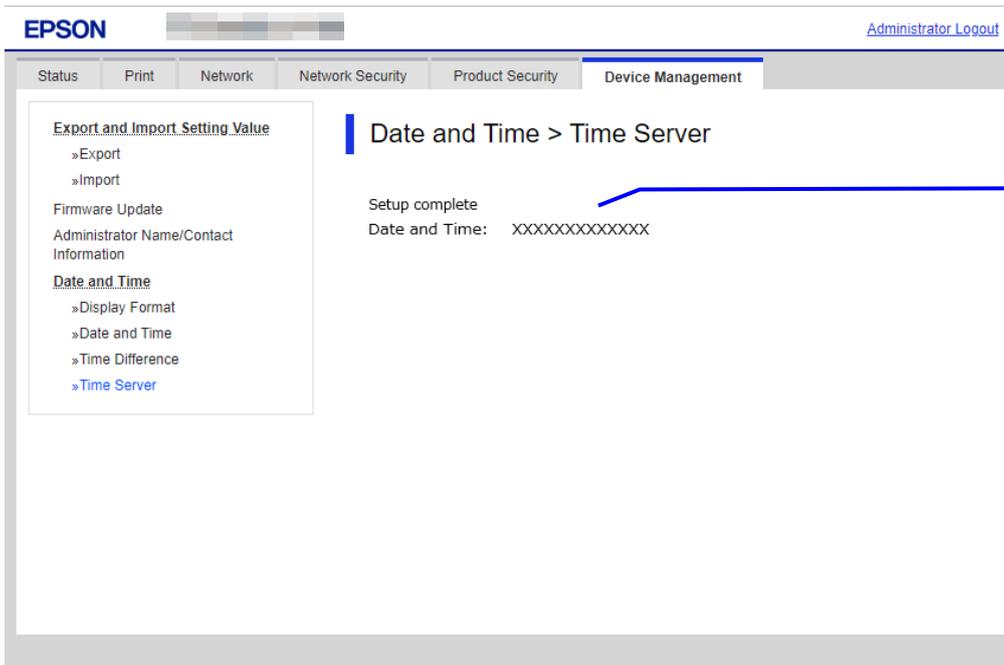

Result

Figure 10-87 Result Page

10.6.4.4.2.2 Setting Result

Results are shown below.

Table 10-263 Result

Items	Description	Condition
"Setup complete"	This message is shown when the settings are completed.	-
"Setup failed"	This message is shown when the settings fail.	-
"Cannot access the product until processing is complete."	This message is shown when the setting is unavailable because the product is processing.	-

10.7 Cloud Services

10.7.1 Basic

10.7.1.1 Top Page

10.7.1.1.1 Image

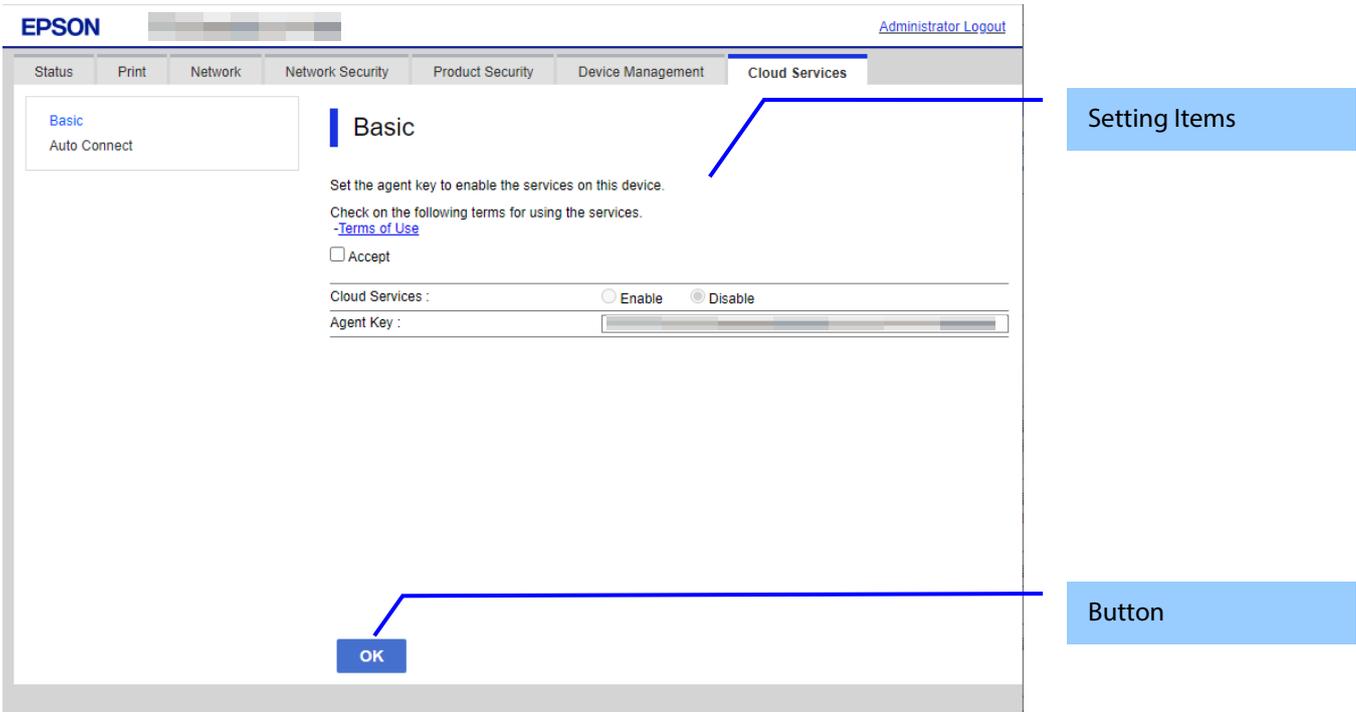


Figure 10-88 Image

10.7.1.1.2 Setting Items

Table 10-264 Setting Items

Items	Description	Condition
"Check on the following terms for using the services."	Fixed String	-
"Cloud Services"	Displays whether it is possible to connect to Cloud Services. "Enable" / "Disable"	-
"Terms of Use"	If you click "Terms of Use", the Web Config accesses the following link in another window. https://pos-cloud-link.epson.com/documents/license.html	-
"Accept"	Check box. When this item is checked then "OK" button is enabled.	-

10.7.1.1.3 Button

The following table shows the button on the page.

Table 10-265 Button

Items	Description
"OK"	The button on bottom of the main frame to perform setting.

10.7.1.2 Result Page

The result message is shown on the main frame after "OK" button is pressed.

10.7.1.2.1 Image

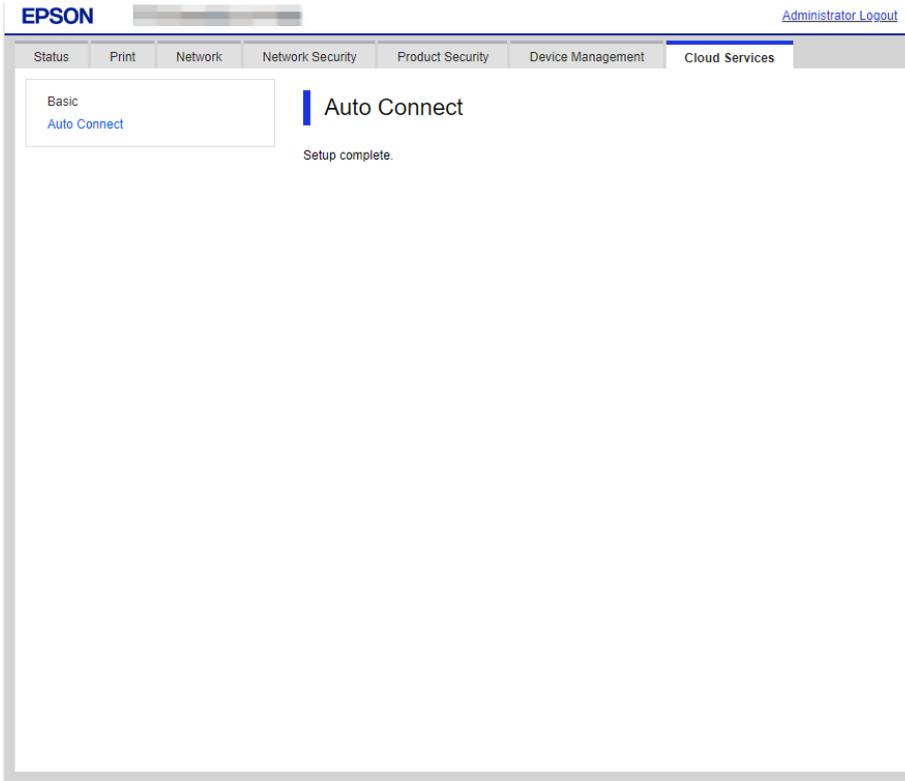


Figure 10-89 Image

10.7.1.2.2 Setting Result

Table 10-266 Setting Result

Items	Description
"Setup complete."	This message is shown when the settings are completed.
"Setup failed."	This message is shown when the setup is failed.

10.7.2 Auto Connection

10.7.2.1 Top Page

10.7.2.1.1 Image

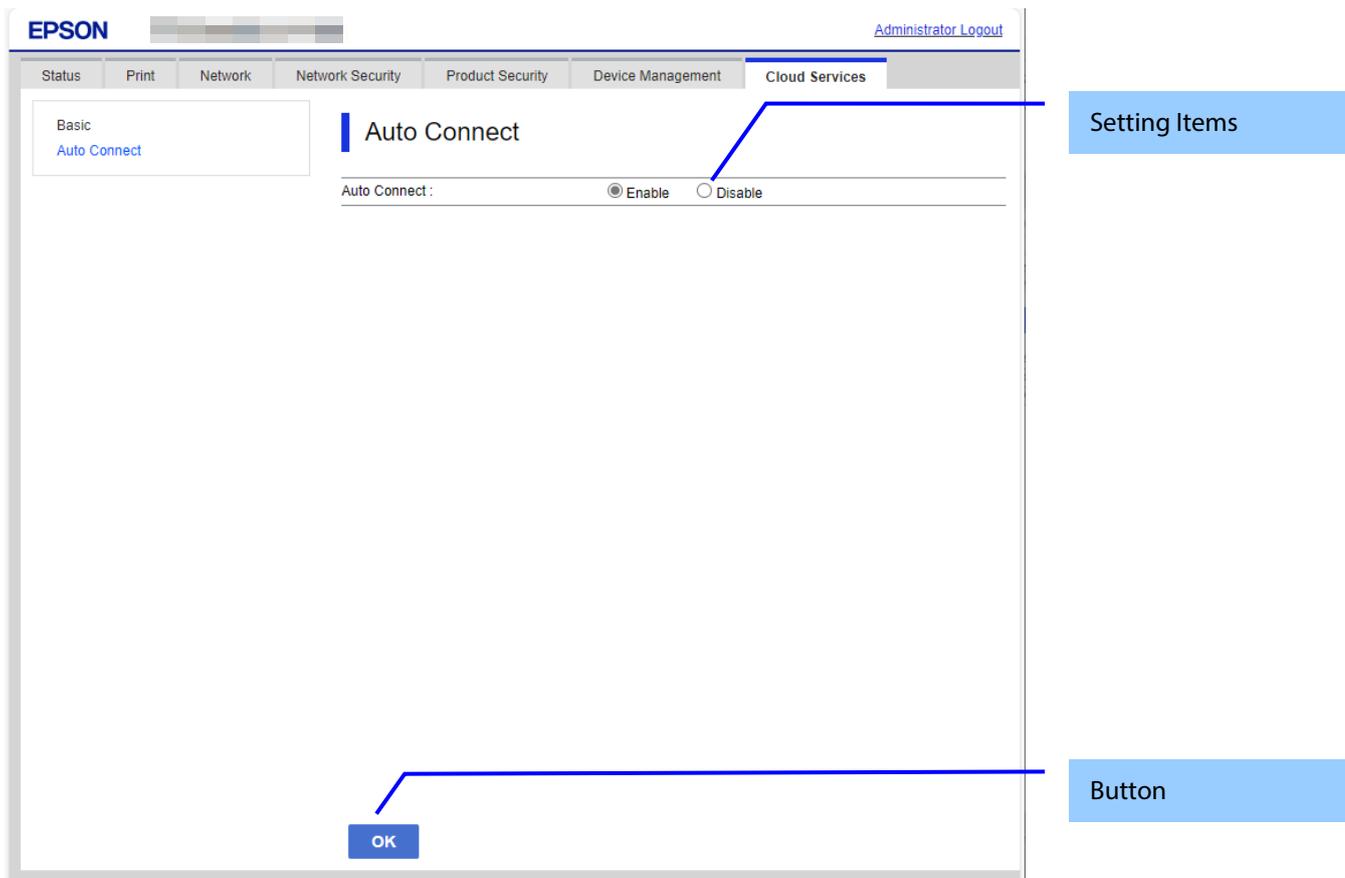


Figure 10-90 Image

10.7.2.1.2 Setting Items

Table 10-267 Setting Items

Items	Description	Condition
"Auto Connect"	Two radio buttons are provided to choose either of the following: "Enable" / "Disable" The default setting is "Enable". If you select "Disable", cloud service auto connection will be disabled.	-

10.7.2.1.3 Button

The following table shows the button on the page.

Table 10-268 Button

Items	Description
"OK"	Button on bottom of the main frame used to perform setting.

10.7.2.2 Result Page

The result message is shown on the main frame after "OK" button is pressed.

10.7.2.2.1 Image

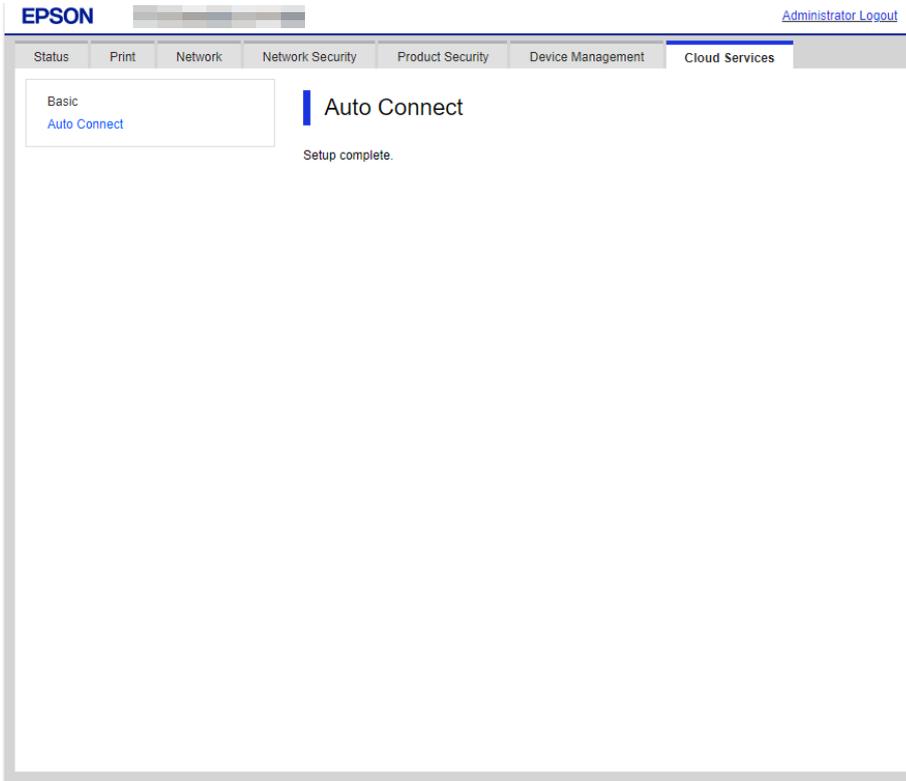


Figure 10-91 Image

10.7.2.2.2 Setting Result

Table 10-269 Setting Result

Items	Description
"Setup complete."	This message is shown when setup is completed.
"Setup failed."	This message is shown when setup has failed.

10.8 No Menu

10.8.1 Firmware Update by Post Method

On the post method firmware update, the user can firmware update by choosing the customized firmware file (efu format) and sending it the product using the web browser.

10.8.1.1 URL

The page is not shown on the menu. The user input the following URL on web browser directly.

http(s)://(Printer's IP address)/PRESENTATION/ADVANCED/POSTFIRMUP/TOP

http(s)://(Printer's host name)/PRESENTATION/ADVANCED/POSTFIRMUP/TOP

10.8.1.2 Screen

Display is changed by four states.

Table 10-270 State

Items	Description
Default	State after this page is opened.
Reading/Posting File	State that the file is read or posted.
Success	State that the process is finished successfully.
Failure	State that the process is finished unsuccessfully.

The following figure shows screens of this function.

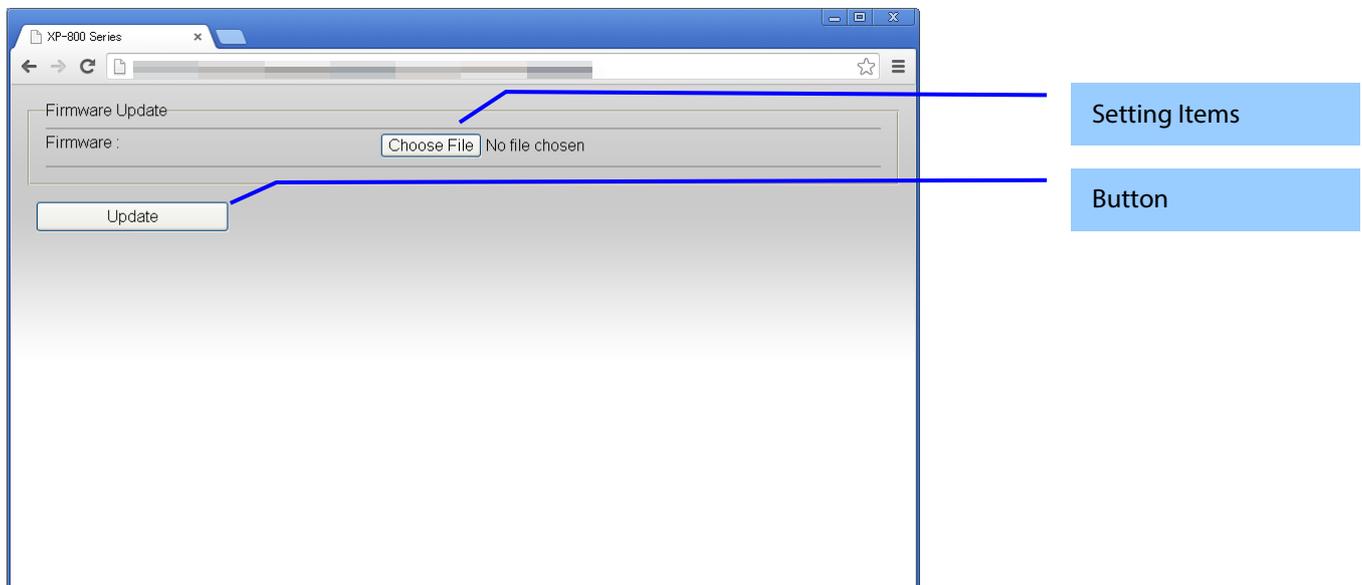


Figure 10-92 Firmware Update by Post Transmitting (Default)

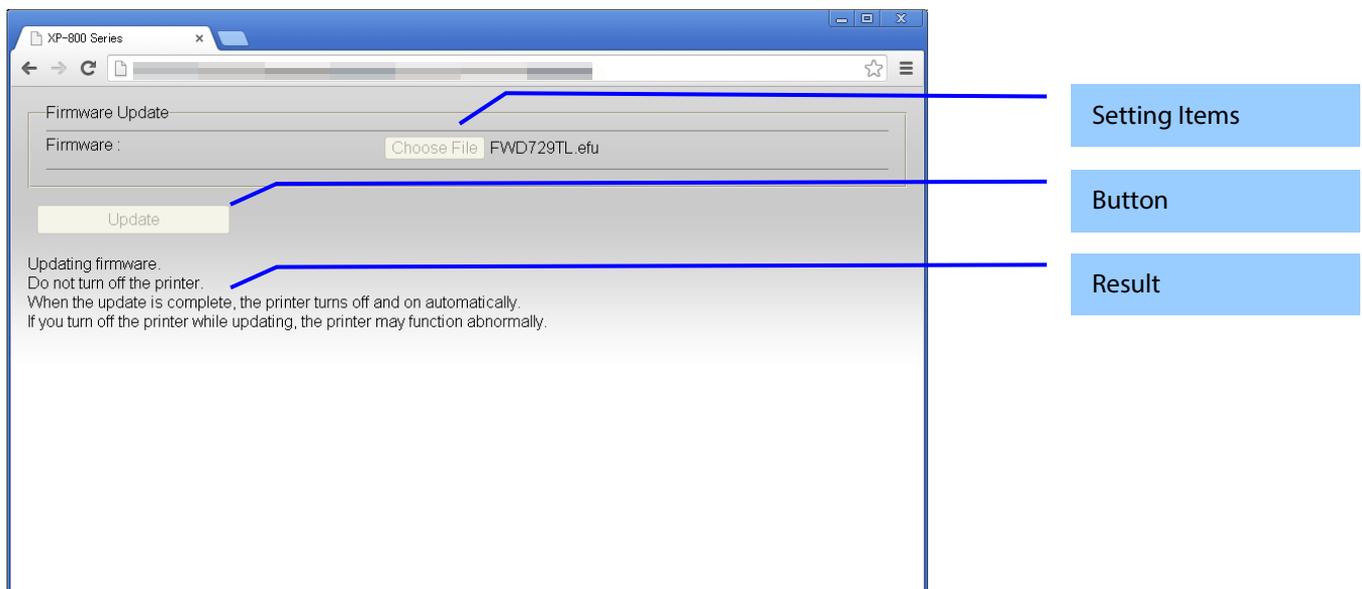


Figure 10-93 Firmware Update by Post Transmitting (Success)

10.8.1.3 Setting Items

The following figure shows a layout of this settings area.

Table 10-271 Setting Items

Items	Description	Condition
"Firmware Update"	Title	-
"Firmware"	User can input the efu file. It also is able to select the file using the file button.	Default or Failure

10.8.1.4 Button

The following table shows the button on the page.

Table 10-272 Button

Items	Description	Condition
"Update"	Start to read the file to push this button. And the screen is transited to Reading/Posting File.	Default or Failure

10.8.1.5 Result

The following table shows the result on the page.

Table 10-273 Result

Items	Description	Condition
"Checking the firmware."	The string that is shown if the state is Reading/Posting File.	Reading/Posting File
"Updating firmware." "Do not turn the product off." "When the update is complete, the product turns off and on automatically." "If you turn the product off while updating, it may function abnormally. Restart the Web Config on browser if you wish to use it."	The string that is shown if the state is Success.	Success
"Cannot update the firmware."	The string that is shown if the state is Failure.	Failure

10.8.1.6 Supported platforms and web browsers

The following table shows the supported platforms and web browsers.

Table 10-274 Supported platforms and web browsers

Platform	Web Browser
Windows XP/Vista/7/8/8.1/10	IE10 or later, Firefox, Chrome
Mac OS X (10.6/10.7/10.8/10.9/10.10/10/11)	Safari, Firefox, Chrome
ChromeOS	Default browser

* There are cases where the bad communication and out-of-memory of the client device, such as, can not be used with supported web browser depending on the operating environment.

10.8.1.7 Error

The following shows the error cases.

- Use unsupported web browser
- Not select a file
- Select invalid file (e.g. the file is not found, the file name is changed)
- Out-of-memory of the client device
- Product is not idle state
- Post efu file of other printer
- Cease updating firmware with panel control
- Network communication error

11. TM-i Settings

11.1 Basic

Displays basic information about TM-i.

11.1.1 Image

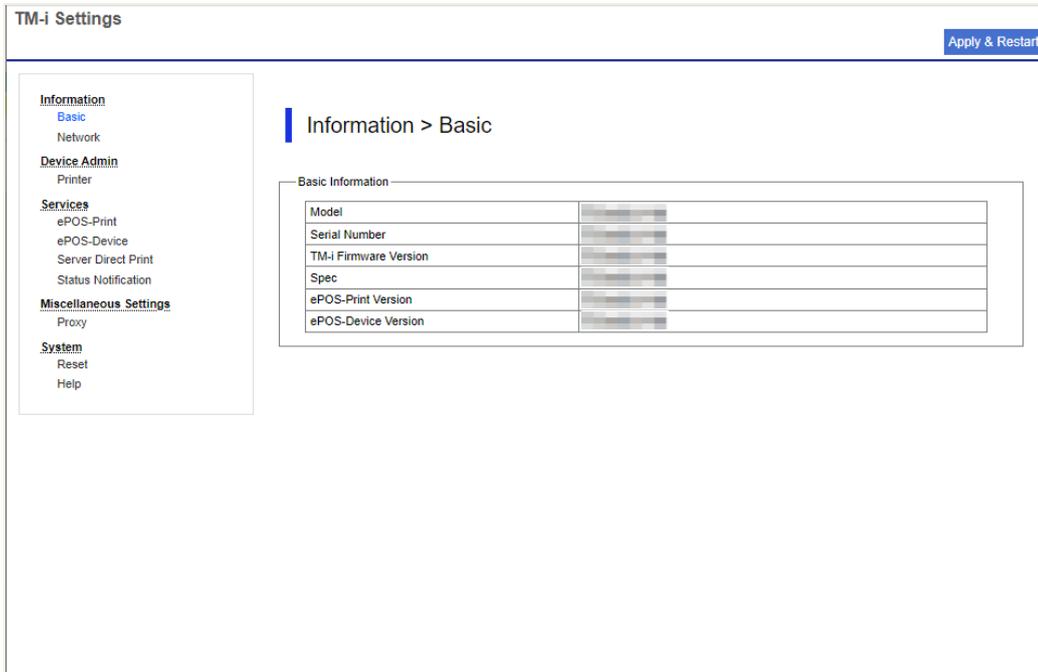


Figure 11-1 Basic

11.1.2 Display Items

Table 11-1 Display Items

Items	Description
Model	Displays the model name.
Serial Number	Displays the serial number.
TM-i Firmware Version	Displays version information for TM-i.
Spec	Displays the destination.
ePOS-Print Version	Display the version of ePOS-Print.
ePOS-Device Version	Displays the version of ePOS-Device.

11.2 Printer

11.2.1 Image

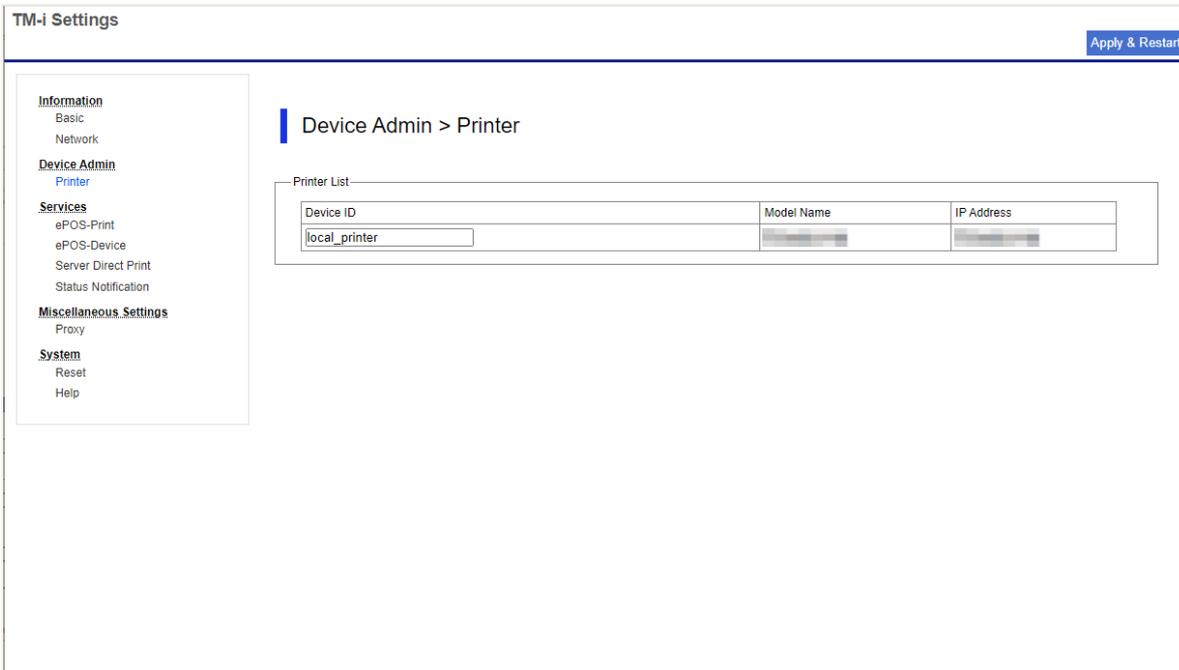


Figure 11-2 Printer

11.2.2 Display Items

Table 11-2 Display Items

Items	Description
Printer List	Displays a list of registered printers. The field for adding a new printer is shown in the bottom row.
Device ID	Displays the ID of the registered device. - Available characters: "A" to "Z", "a" to "z", "0" to "9", "-", ".", "_" (Single-byte spaces are not allowed.) - Number of characters: 1 to 30
Model Name	Displays the model name or model series.
IP Address	Displays the IP address of the printer. If an IP address is not established, "Invalid IP address" is displayed.

11.3 ePOS-Print

11.3.1 Image

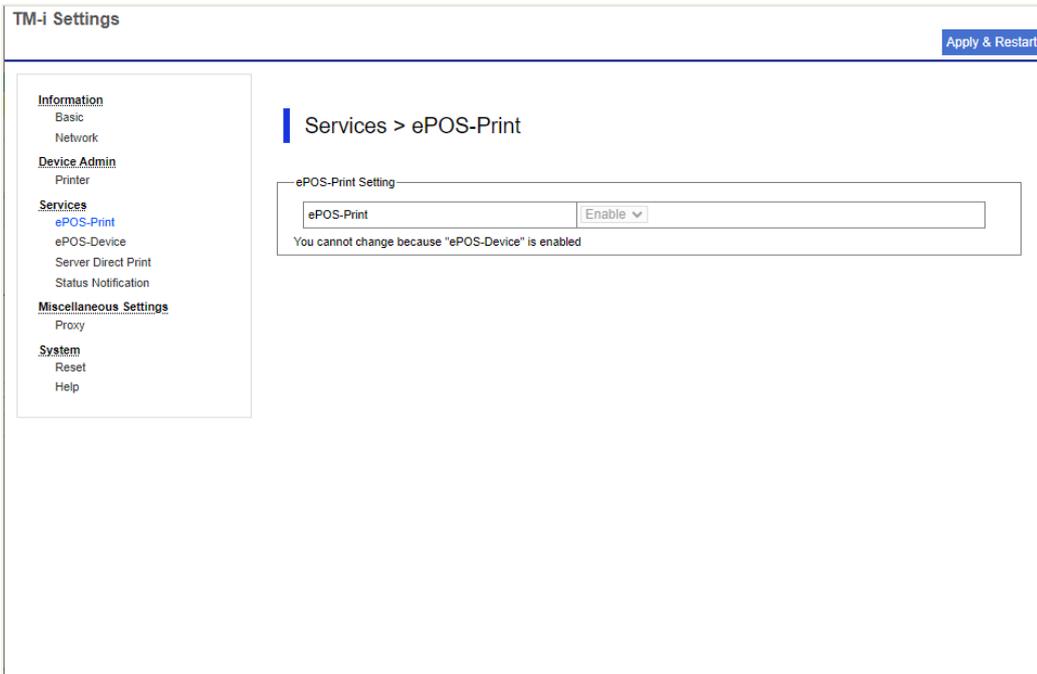


Figure 11-3 ePOS-Print

11.3.2 Display Items

Table 11-3 Display Items

Items	Description
ePOS-Print	Displays the ePOS-Print enable/disable settings.
Note	Displays any notes.

11.4 ePOS-Device

11.4.1 Image

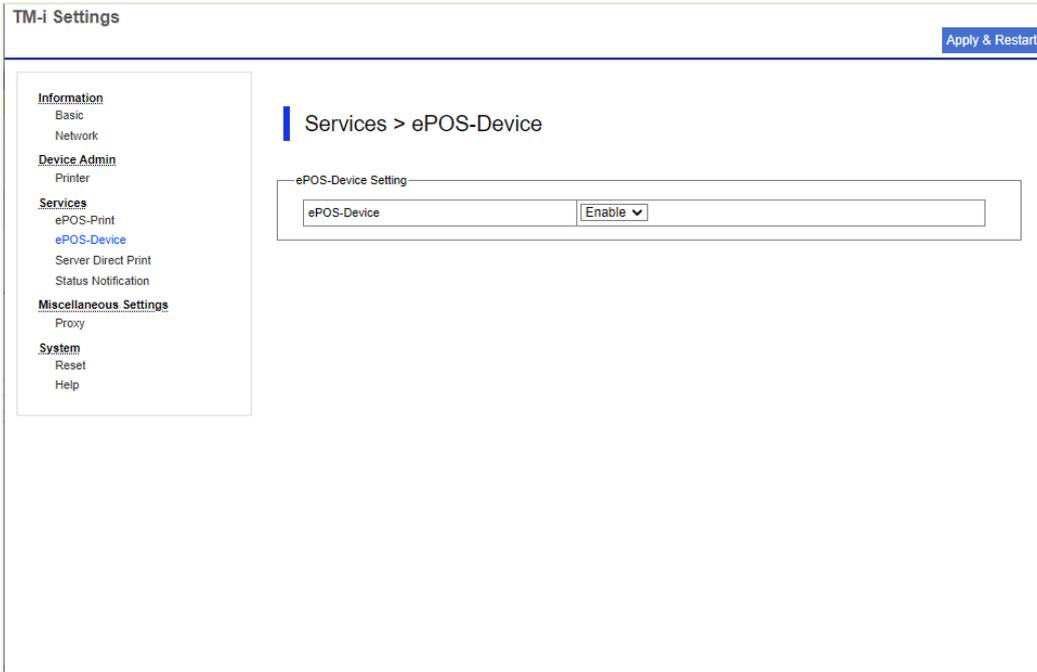


Figure 11-4 ePOS-Device

11.4.2 Display Items

Table 11-4 Display Items

Items	Description
ePOS-Device	Displays the ePOS-Device enable/disable settings.
Note	Displays any notes.

11.5 Server Direct Print

11.5.1 Image

TM-i Settings Apply & Restart

Information
Basic
Network

Device Admin
Printer

Services
ePOS-Print
ePOS-Device
Server Direct Print
Status Notification

Miscellaneous Settings
Proxy

System
Reset
Help

Services > Server Direct Print

Server Direct Print Setting

Server Direct Print		Enable ▼
Server1	URL(Input with http:// or https://)	<input type="text"/>
	Interval(s) [0-86400]	<input type="text" value="5"/>
Server2	URL(Input with http:// or https://)	<input type="text"/>
	Interval(s) [0-86400]	<input type="text" value="5"/>
Server3	URL(Input with http:// or https://)	<input type="text"/>
	Interval(s) [0-86400]	<input type="text" value="5"/>
ID		<input type="text"/>
Password		<input type="text"/>
URL Encode		Enable ▼
Name		<input type="text"/>
Server Authentication		Disable ▼

Figure 11-5 Server Direct Print

11.5.2 Display Items

Table 11-5 Display Items

Items	Description
Server Direct Print	Displays the server direct settings.
Server1	Displays the first server.
Server2	Displays the second server.
Server3	Displays the third server.
URL	Displays the URL of the server to be accessed.
Interval(s)	Displays the interval for attempting access, in seconds.
ID	Displays the ID used for server authentication.
Password	Displays the password used for server authentication.
URL Encode	Enables URL encoding.
Name	Displays the name for identifying the printer.
Server Authentication	Displays the server authentication settings.

11.6 Status Notification

11.6.1 Image

The screenshot shows the 'TM-i Settings' interface. On the left is a navigation menu with categories: Information (Basic, Network), Device Admin (Printer), Services (ePOS-Print, ePOS-Device, Server Direct Print, Status Notification), Miscellaneous Settings (Proxy), and System (Reset, Help). The main area is titled 'Services > Status Notification'. Below this is a 'Status Notification Setting' form with the following fields:

- Status Notification: Enable (dropdown)
- URL (Input with http:// or https://): [Empty text box]
- Interval(s) [1-66400]: 5 (text box)
- ID: [Empty text box]
- Password: [Empty text box]
- URL Encode: Enable (dropdown)
- Name: [Empty text box]
- Server Authentication: Disable (dropdown)

An 'Apply & Restart' button is located in the top right corner of the settings area.

Figure 11-6 Status Notification

11.6.2 Display Items

Table 11-6 Display Items

Items	Description
Status Notification	Displays the status notification settings.
URL	Displays the URL of the server to be accessed.
Interval(s)	Displays the interval for attempting access, in seconds.
ID	Displays the ID used for server authentication.
Password	Displays the password used for server authentication.
URL Encode	Enables URL encoding.
Name	Displays the name for identifying the printer.
Server Authentication	Displays the server authentication settings.

11.7 Proxy

11.7.1 Image

TM-i Settings Apply & Restart

Information
Basic
Network

Device Admin
Printer

Services
ePOS-Print
ePOS-Device
Server Direct Print
Status Notification

Miscellaneous Settings
Proxy

System
Reset
Help

Miscellaneous Settings > Proxy

Proxy Setting

Proxy	Enable ▼
URL(Input with http:// or https://)	
Port	80
ID	
Password	

Services

Server Direct Print	Disable ▼
Status Notification	Disable ▼

Figure 11-7 Proxy

11.7.2 Display Items

Table 11-7 Display Items

Items	Description
Proxy	Displays the proxy settings.
URL	Displays the URL of the proxy server.
Port	Displays the port of the proxy server.
ID	Displays the ID used for proxy authentication.
Password	Displays the password used for proxy authentication.
Services	Used to configure the services for activating the settings.

11.8 Reset

11.8.1 Image

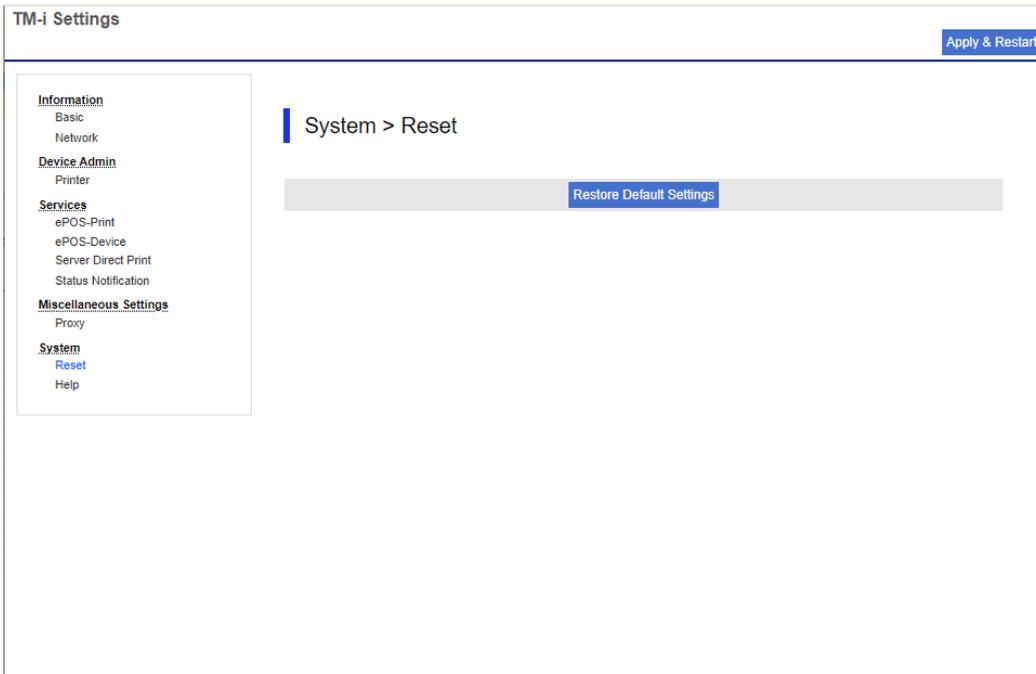


Figure 11-8 Reset

11.8.2 Display Items

Table 11-8 Display Items

Items	Description
Restore Default Settings	Click this button to restore the factory default settings.

11.9 Help

11.9.1 Image

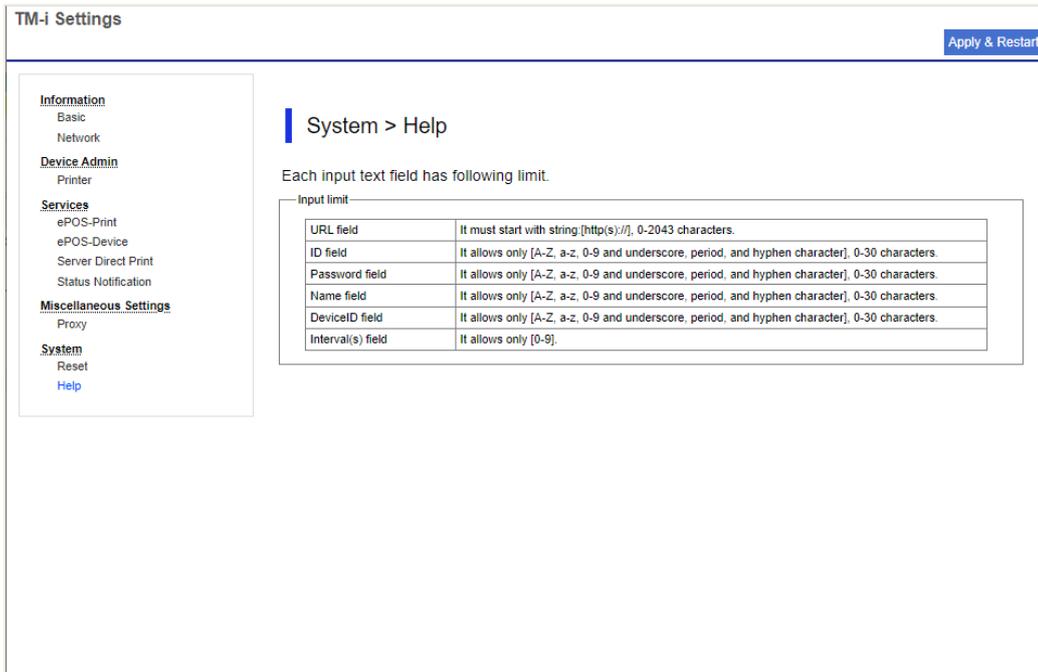


Figure 11-9 Basic

11.9.2 Display Items

Table 11-9 Display Items

Items	Description
Input limit	Explanation of limitations on characters that can be used.
URL field	Displays a description of the input limitations for URL. "Must start with [http(s)://] and not exceed 2043 characters."
ID field	Displays a description of the input limitations for ID. "Only [A-Z, a-z, 0-9, underscores, periods, and hyphens] are allowed, up to 30 characters."
Password field	Displays a description of the input limitations for Password. "Only [A-Z, a-z, 0-9, underscores, periods, and hyphens] are allowed, up to 30 characters."
Name field	Displays a description of the input limitations for Name. "Only [A-Z, a-z, 0-9, underscores, periods, and hyphens] are allowed, up to 30 characters."
DeviceID field	Displays a description of the input limitations for Device ID. "Only [A-Z, a-z, 0-9, underscores, periods, and hyphens] are allowed, up to 30 characters."
Interval(s) field	Displays a description of the input limitations for Interval. "Only [0-9] are allowed."

12. List of Functions by Model

Functions	Models	TM-P20II, TM-P80II	TM-m30III, TM-m30III-H	TM-m50II, TM-m50III-H
	Display			
Status	Always displayed	✓	✓	✓
Product Status	Always displayed	✓	✓	✓
Network Status	Always displayed	✓	✓	✓
Roaming Setting	Equipped and enabled	✓	-	-
TM-Intelligent	Always displayed	-	✓	✓
Print	Always displayed	✓	✓	✓
Network	Always displayed	✓	✓	✓
Network Basic	Always displayed	✓	✓	✓
Wi-Fi	Equipped and enabled	✓	✓	✓
Wired LAN	Always displayed	-	✓	✓
Wi-Fi Direct	Equipped and enabled	✓	✓	✓
Network Security	Always displayed	✓	✓	✓
Protocol	Always displayed	✓	✓	✓
CA Certificate	Always displayed	✓	✓	✓
Root Certificate Update	Always displayed	✓	✓	✓
SSL/TLS	Always displayed	✓	✓	✓
Automatic Certificate Update	Always displayed	-	✓	✓
IPsec/IP Filtering	Always displayed	✓	✓	✓
IEEE802.1X	Always displayed	✓	✓	✓
Product Security	Always displayed	✓	✓	✓
Password Encryption	Always displayed	✓	✓	✓
Change Administrator Password	Always displayed	✓	✓	✓
Device Management	Always displayed	✓	✓	✓
Export and Import Setting Value	Always displayed	✓	✓	✓
Firmware Update	Always displayed	✓	✓	✓
Administrator Name/Contact Information	Always displayed	✓	✓	✓
Date and Time	Always displayed	✓	✓	✓
Cloud Services	Always displayed	-	✓	-
TM-Intelligent	Always displayed	-	✓	✓